

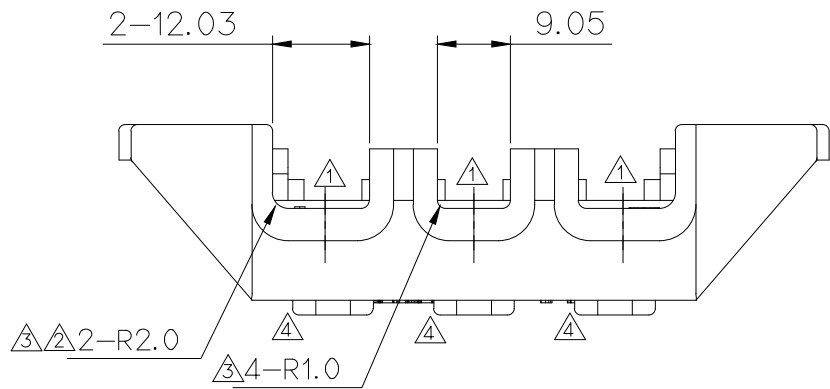
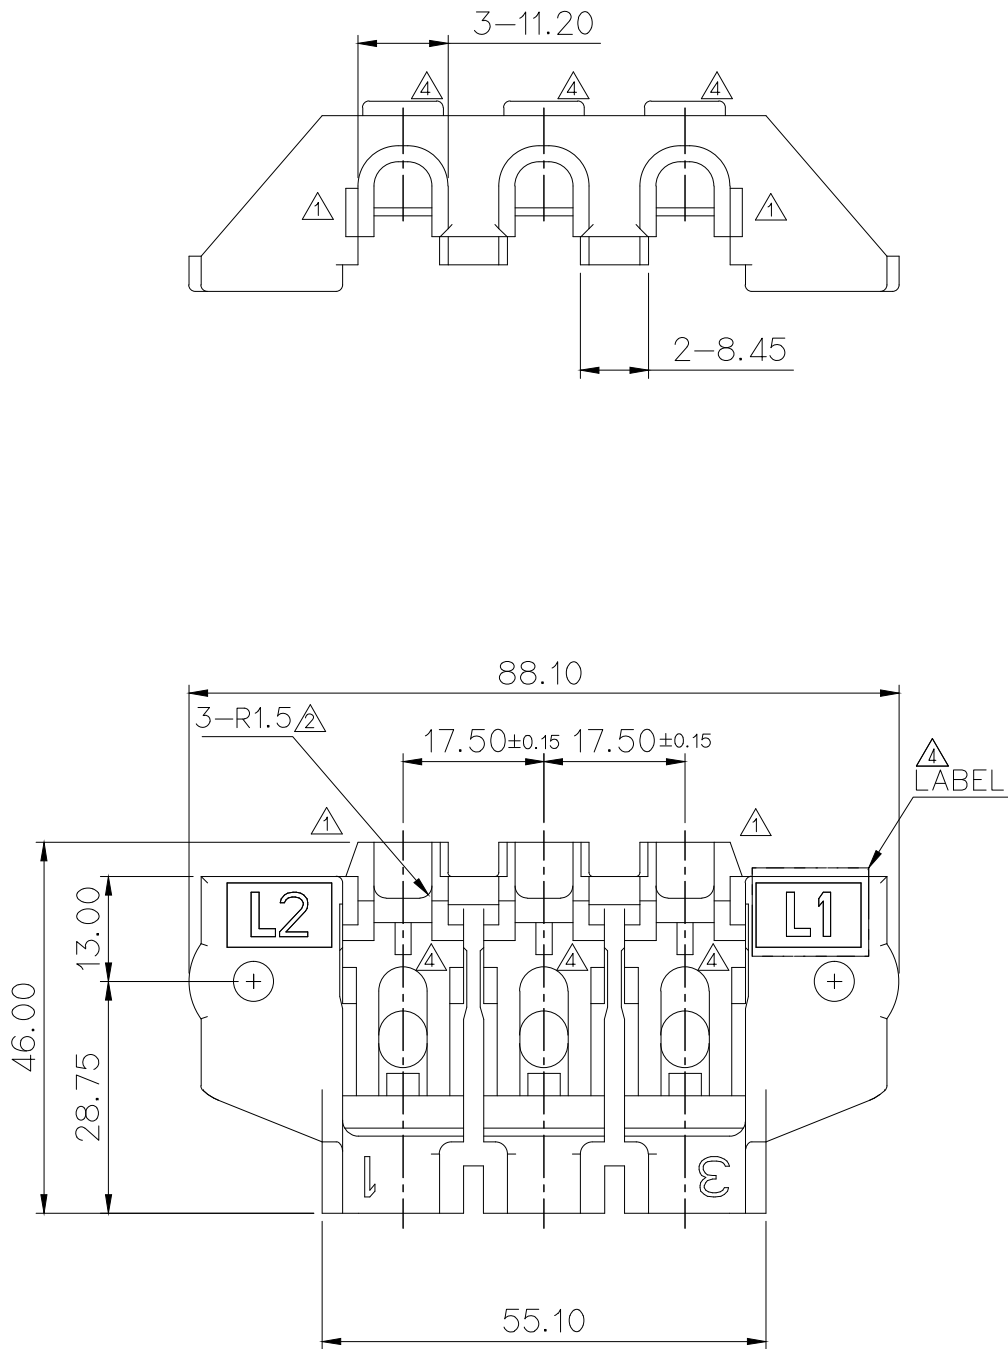
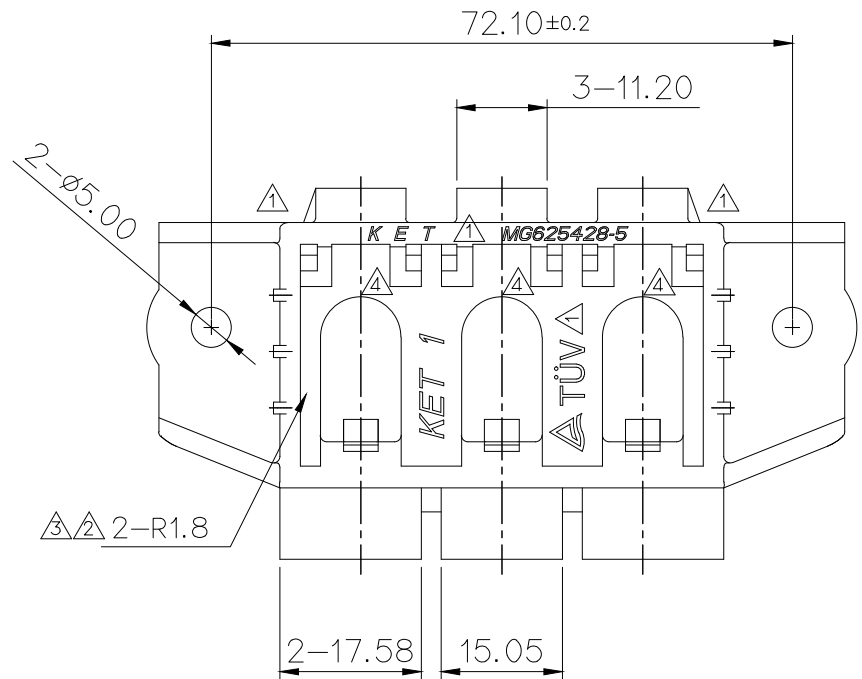


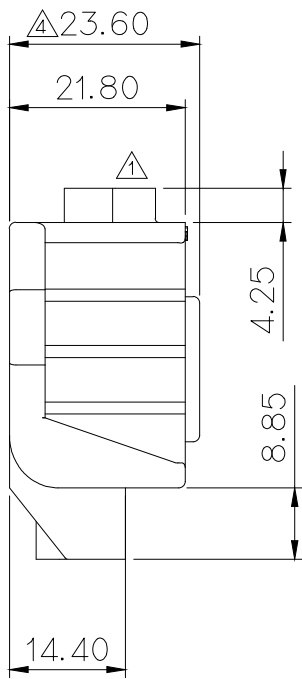

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST761319-3,761320-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- 4.LABEL: DO NOT DEVIATE FROM THE OUTSIDE OF THE HOUSING NO INTERFERENCE IN THE ø5.00 HOLE POSITION 'L1' AND 'L2' WILL NOT CHANGE

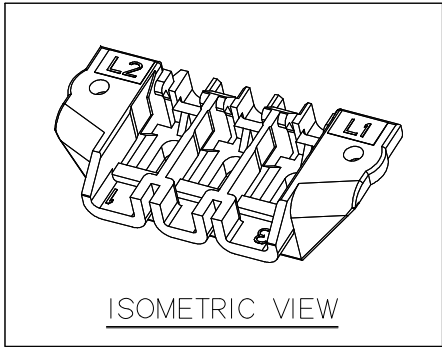

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST761319-3,761320-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 4.LABEL: HOUSING 외곽으로 벗어나지 않을 것. ø5.00 HOLE에 간섭이 없을 것. 'L1', 'L2' 위치 바뀌지 않을 것.

						MATERIAL		PHENOL		 KOREA ELECTRIC TERMINAL CO., LTD.	
④		"ECO-2009-286" 의거 도면재작성		YHJ PSH KSH '20/09/17		FINISH		BLACK			
③		"ECO-1911-220" 의거 도면재작성		SMG KSH KHG '19/11/18		WIRE RANGE		CLASS		POWER CONN'T	
②		"ECO-1603-288" 의거 도면재작성		KSH '16/03/18		INSULATION		TYPE			
①		"ECO-1111-208" 의거 도면재작성		KSH '11/11/20		TOLERANCE EXCEPT AS NOTED		SCALE		PART NO.	
LTR		REVISION RECORD		DR. CHK. APP. DATE		SEE TABLE		1/1		MG625428-5	
DR.		KSH. '11. 02.08		CHK.		PART NAME		POWER-BLOCK (3상)			
CHK.				APP. '11. 02/08							



ISSUE MARK