


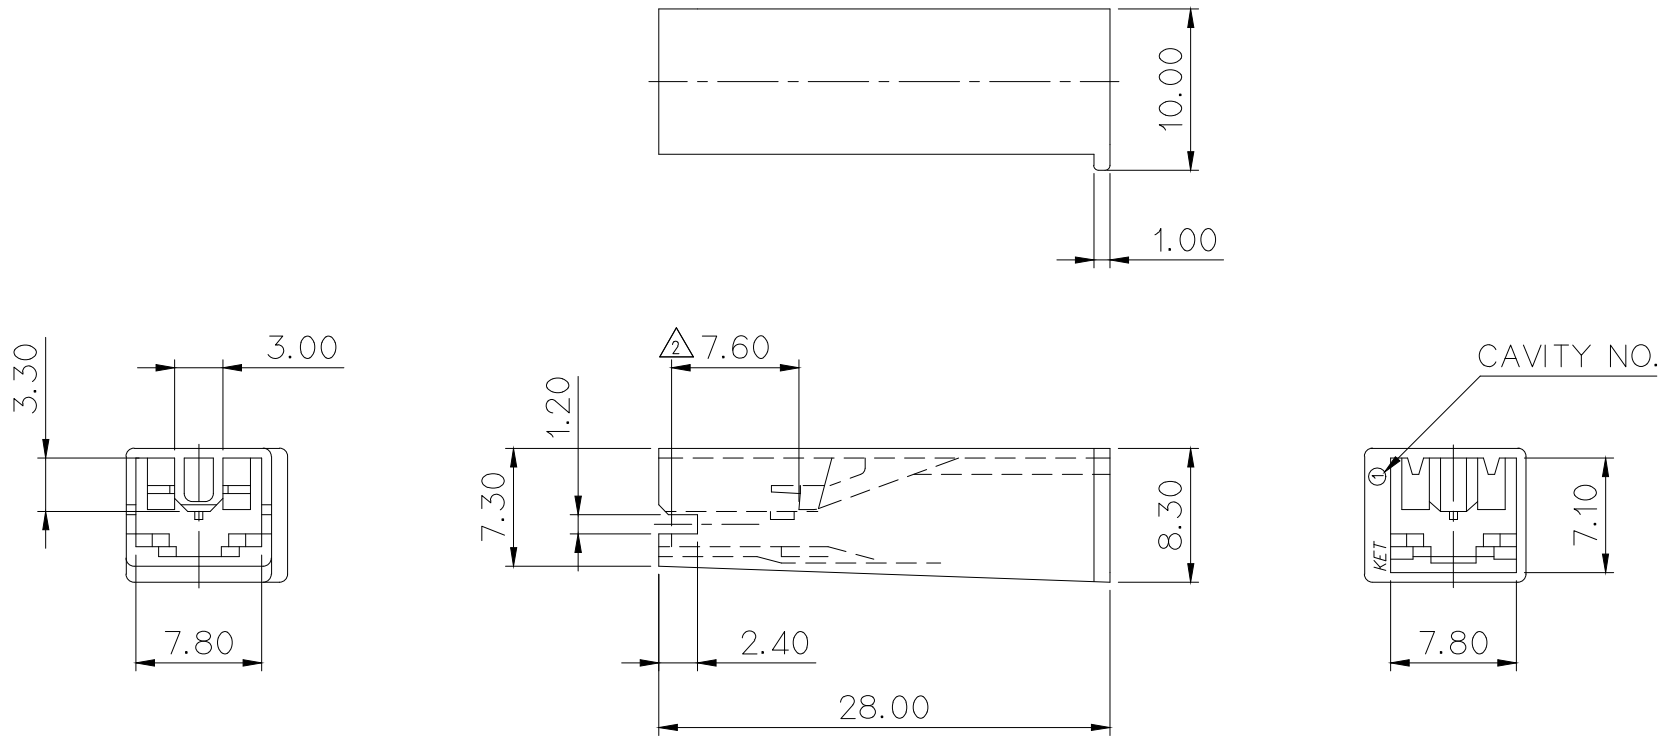

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730570-3/571-2/572-3
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

No.	PART NO.	MATERIAL
1	MG630591	NYLON66
2	MG630591R	NYLON66(V0)

NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 터미널 : ST730570-3/571-2/572-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

APPROVED

2017-08-10

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
④	ECO-1510-174의거 도면 재작성	SMG	KSH	BUC	'15.10.13	FINISH NATURAL		
③	설계사양변경(S110128)근거 도면 재작성	PJM			'11.04.28	WIRE RANGE		
②	설계사양변경(S050133)근거 도면 재작성	HAK			05.06.07	INSULATION		
①	설계사양변경(S040114)근거 도면 재작성	LSY			04.08.25	TYPE 250 P-LOCK		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG630591 / MG630591R
DR.	OH '93.12.29	CHK.				PART NAME		
CHK.	S. w kw 6/18	APP.			1/5	250 P-LOCK 1P HOUSING		