



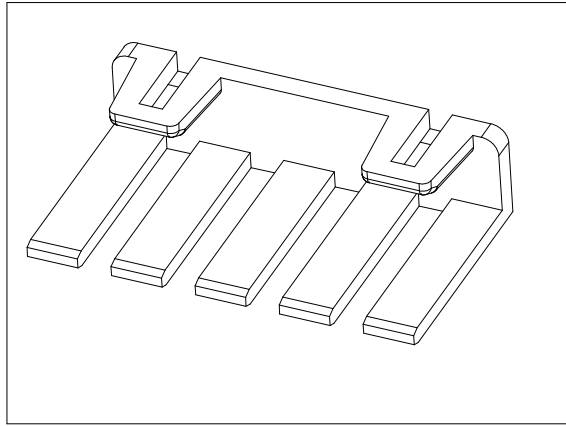


NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

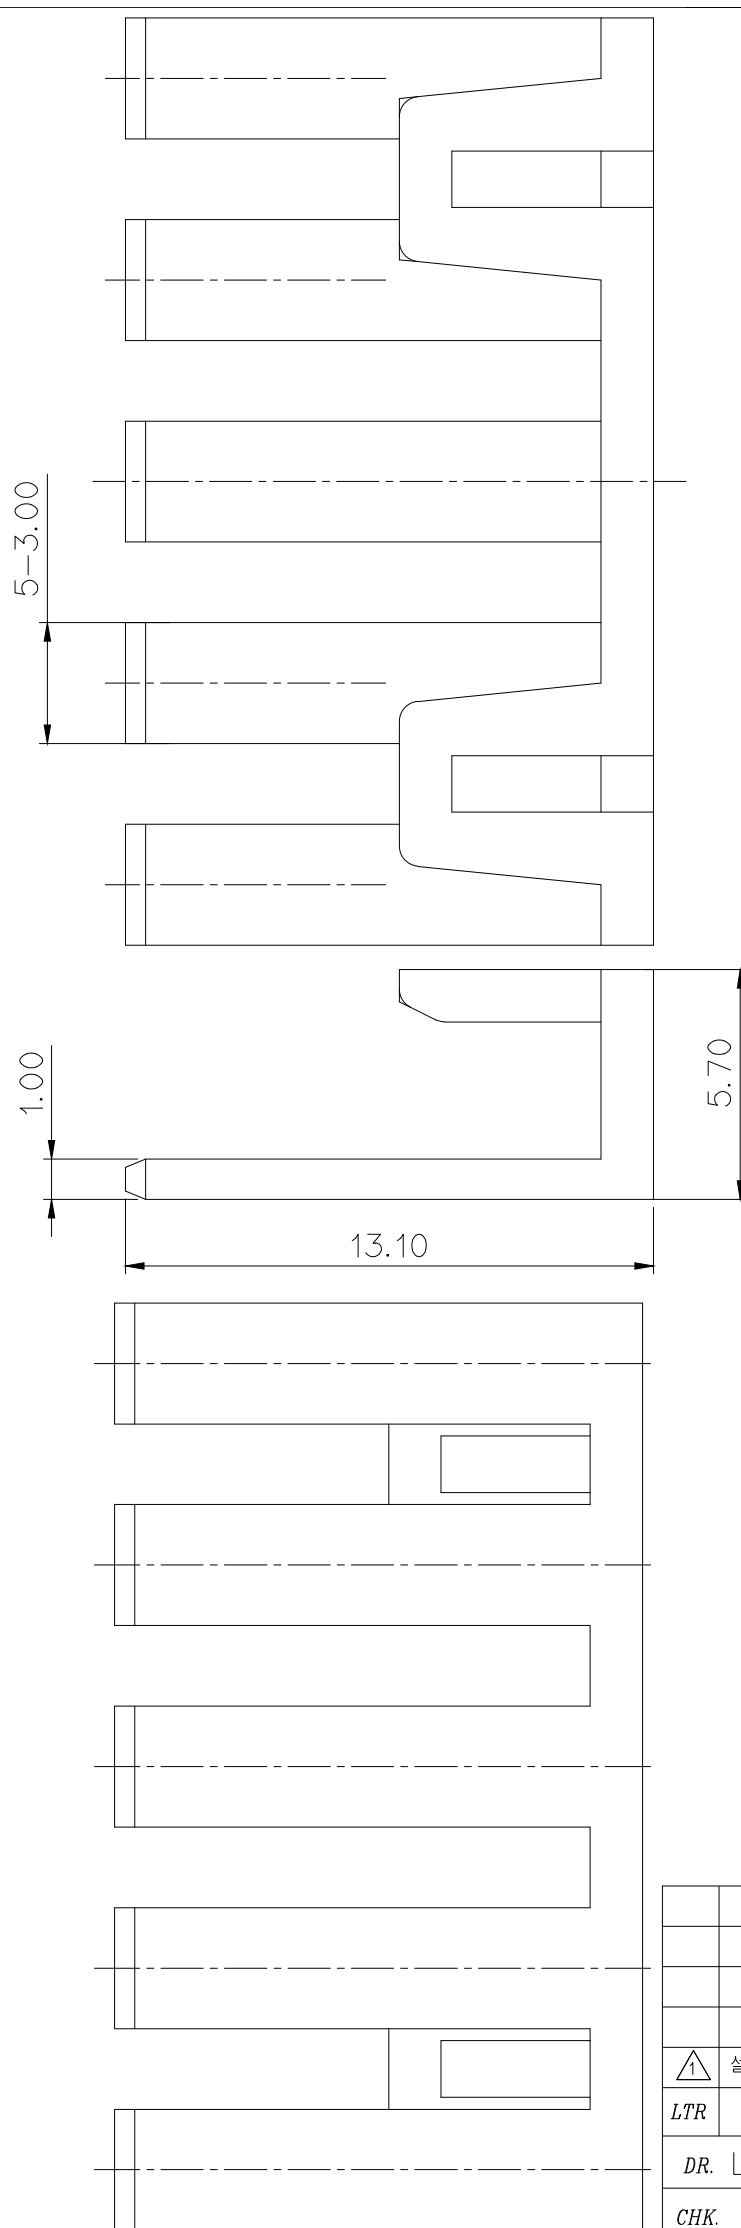

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
2. 적용 HOUSING: MG613042-5
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

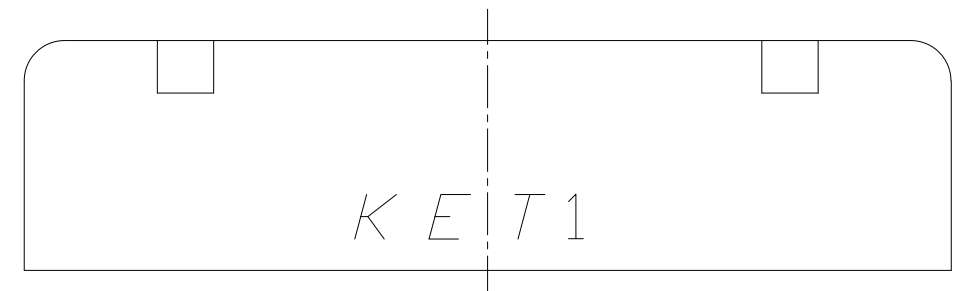

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG613042-5
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2016-03-09

**KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product
Development Team**

ISSUE MARK

					MATERIAL		PBT	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH		SEE TABLE	
					WIRE RANGE		CLASS	
△	설계사양변경(S110128)근거 도면 재작성	DR.	CHK.	APP.	DATE	INSULATION		TYPE
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1
DR. LSY. 05.06.27		CHK.				SEE TABLE		PART NO. MG633661
CHK. 05.06.27		APP.		05.06.27		PART NAME 250 5F REAR HOLDER		