
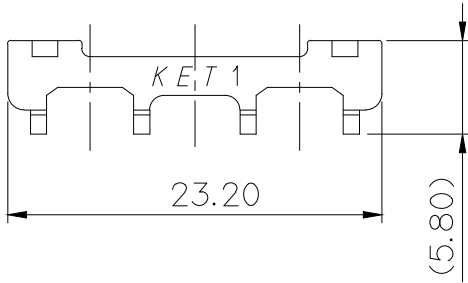
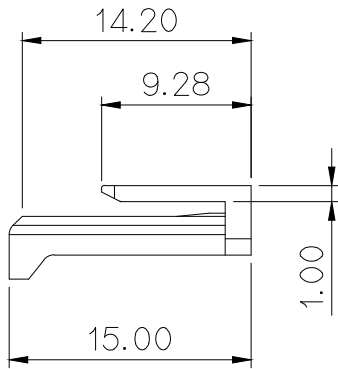
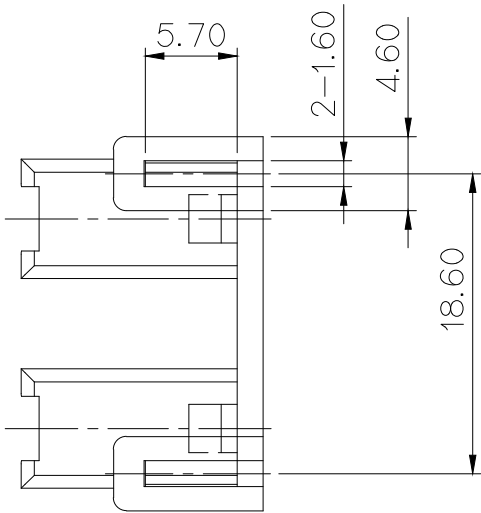


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NOTE

1. MUST BE FREE OF FLASH, WELDLINE, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG632202R-1,2,3
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

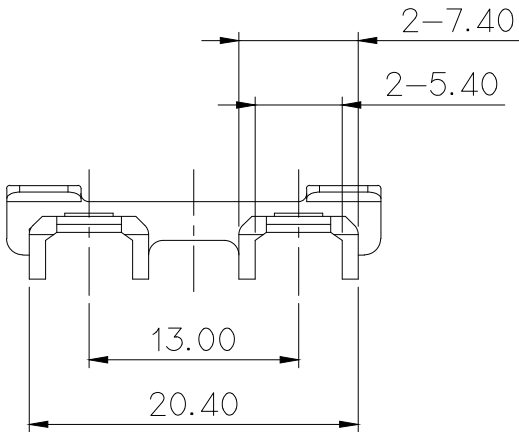

NO.	MATERIAL	COLOR
* 0	PBT (V0)	NATURAL
* 1		RED
2		BLUE
3		YELLOW
5		BLACK

주 기

- 1.기능상 유해한 FLASH, WELDLINE, 수축 등이 없을것.
- 2.적용 ITEM HOUSING: MG632202R-1,2,3
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-03-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL	PBT(V0)	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	NAT.		
					WIRE RANGE		CLASS	250
					INSULATION		TYPE	P-LOCK
⚠	설계사양변경(S110128)의거 도면 제작성	PJM		'11.04.28	TOLPRANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG633858
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE			
	DR. KSH. 2007.01.21		CHK. HAK. 2007.01.31					
	CHK.		APP. CBH. 2007.01.31					
						PART NAME	250 P-LOCK 2P R/H	