





GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30°	0.1	

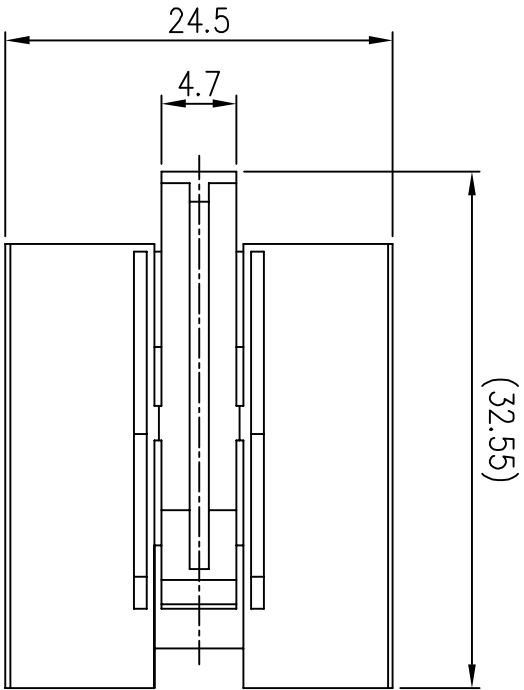

- 주 기**
- 1.기능상 유해한 BURR, WELDLINE이 없을 것
 - 2.적용 TERMINAL: ST730570-3/571-3/572-3
 - 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

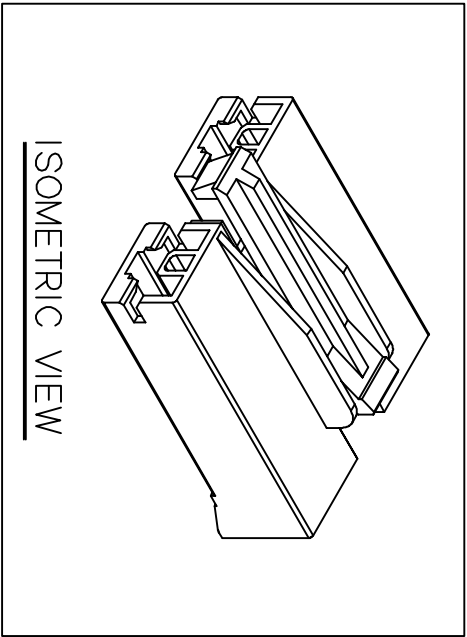

ISOMETRIC VIEW

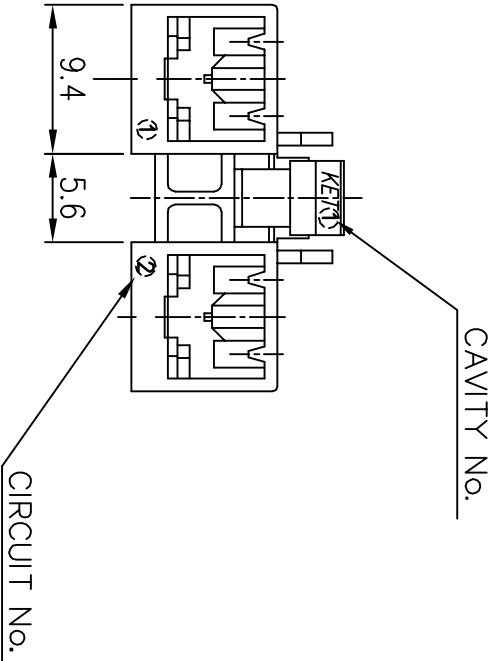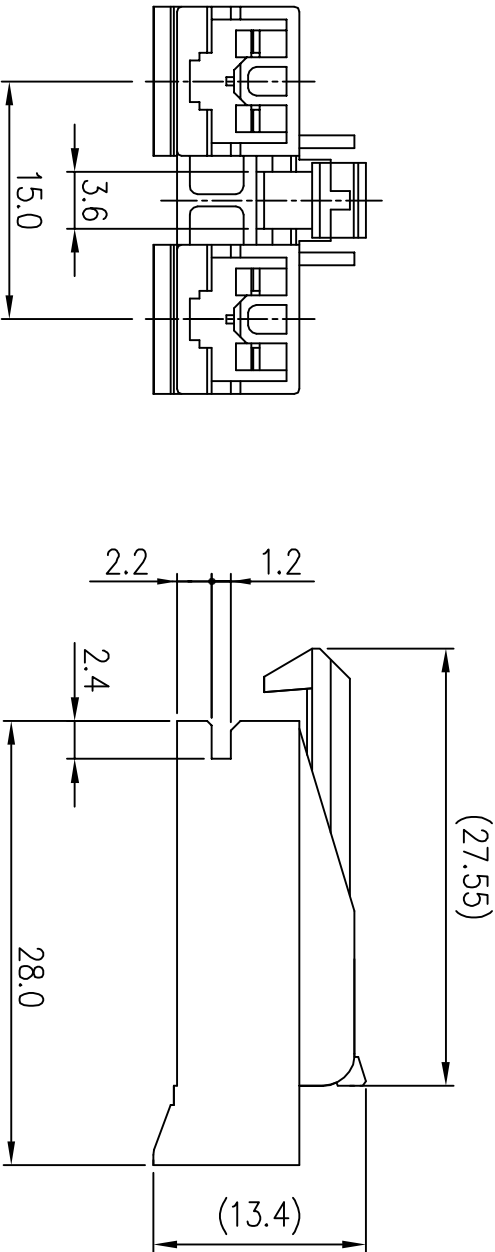

NOTE

- 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE TERMINAL : ST730570-3/571-3/572-3
- 3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PBT+PC(V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

						MATERIAL	PBT+PC(V0)	KIEP KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH	RED		
						WIRE RANGE			
						INSULATION			
						CLASS	.250		
△	설치시용변경(SI10128)근거 도면 재작성	KSJ			11.04.27				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG 633986
DR.	P.J.M '07.09.10	CHK.							
CHK.		APP.	PART NAME 250 P-LOCK 2P HOUSING (15mm)						

ISSUE MARK