

1. MUST BE FREE OF BURR, WELDLINE

AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL : ST730570-3,571-3






3.6 HAZARDOUS SUBSTANCES IN PARTS (Lead,)

Mercury, Cadmium, Hexavalent Chromium, PBBs,

PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION.

4. APPLICABLE R/HOLDER : MG634882

GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

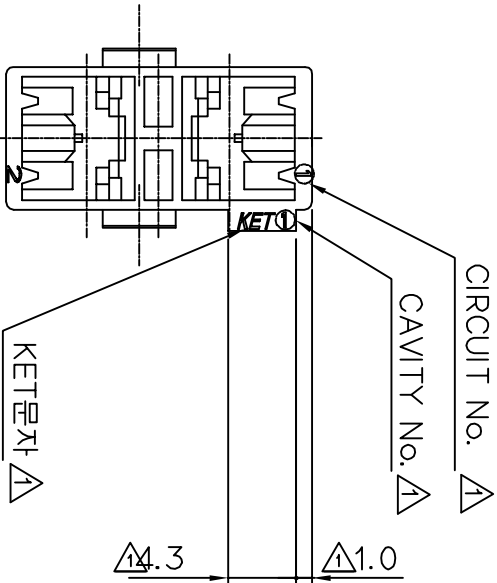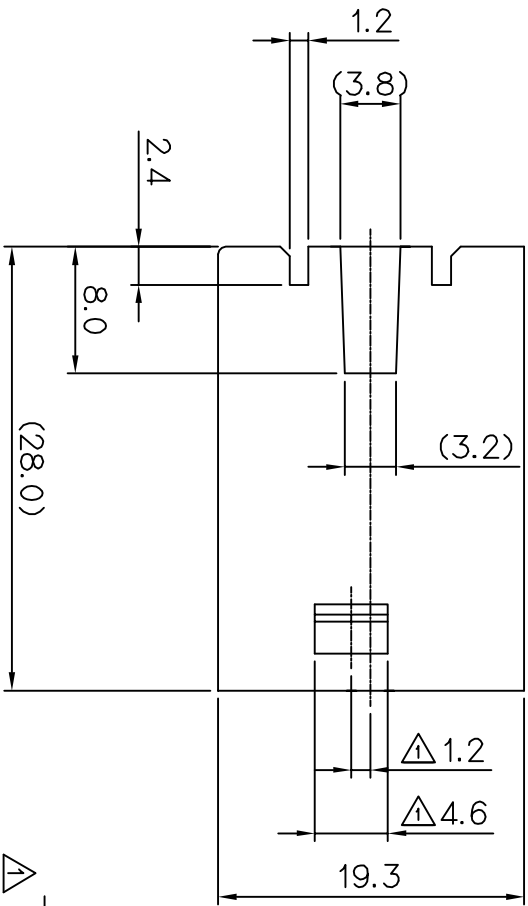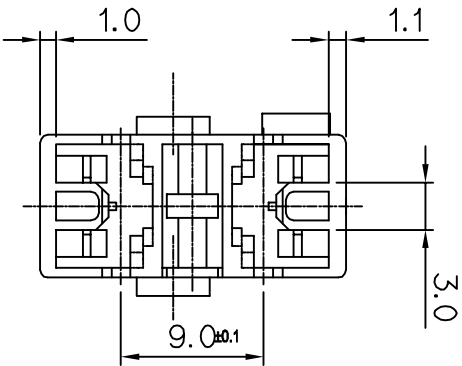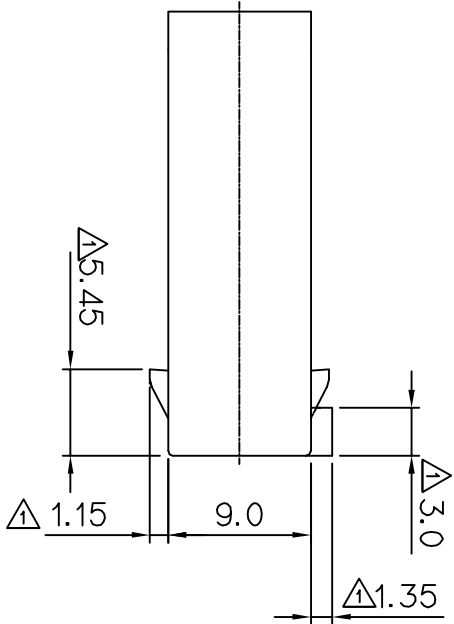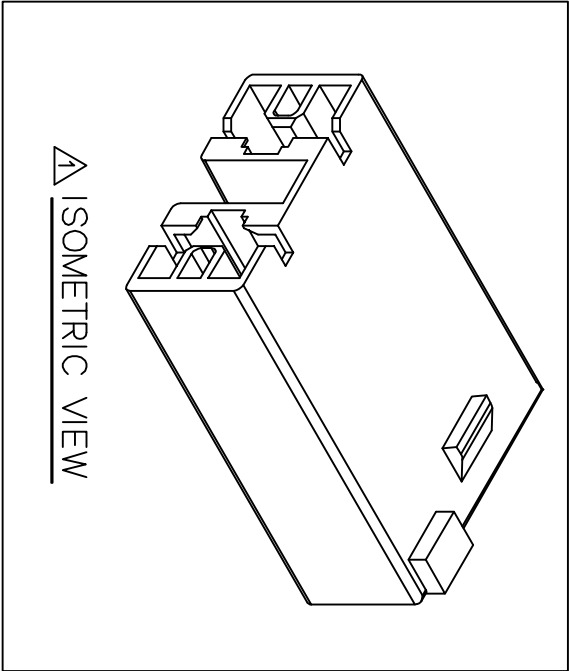

1.기능상 우해한 BURR 및 WELDLINE등이 없을것.

2. 적용 단자 : ST730570-3, 571-3

3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬

PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한
최대 허용농도를 초과해서는 안 된다.

4. 적용 R/HOLDER : MG634882

ISSUE MARK

					MATERIAL	PA66 (V0)		KET KOREA ELECTRIC TERMINAL CO., LTD. /ENGINEERED/
					FINISH	NATURAL		
					WIRE RANGE	CLASS .250		
					INSULATION	TYPE P-LOCK		
△	설치시공비고(S090268) 근거 도면 수정	C/H	✓ 10.09.10		TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	2/1	MG 634107R	
DR.	P.J.M '07.12.14	CHK.	✓ 12/14	✓ 12/14		PART NAME		
CHK.		APP.	✓ 12/14	12/14	250 P-LOCK 2P HOUSING (9mm) NOISE FILTER			