


GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

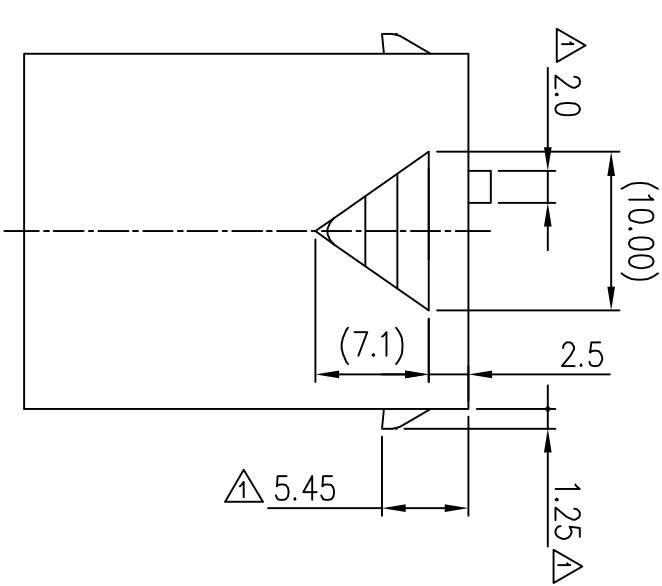

1. MUST BE FREE OF BURR, WELDLINE

AND IMPERFECTION THAT AFFECT FUNCTION.




2. APPLICABLE TERMINAL : ST730570-3,571-3

3.6HAZARDOUS SUBSTANCES IN PARTS (Lead, ¹

Mercury, Cadmium, Hexavalent Chromium, PBBs,

PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& ROHS REGULATION.

4. APPLICABLE R/HOLDER : MG634825

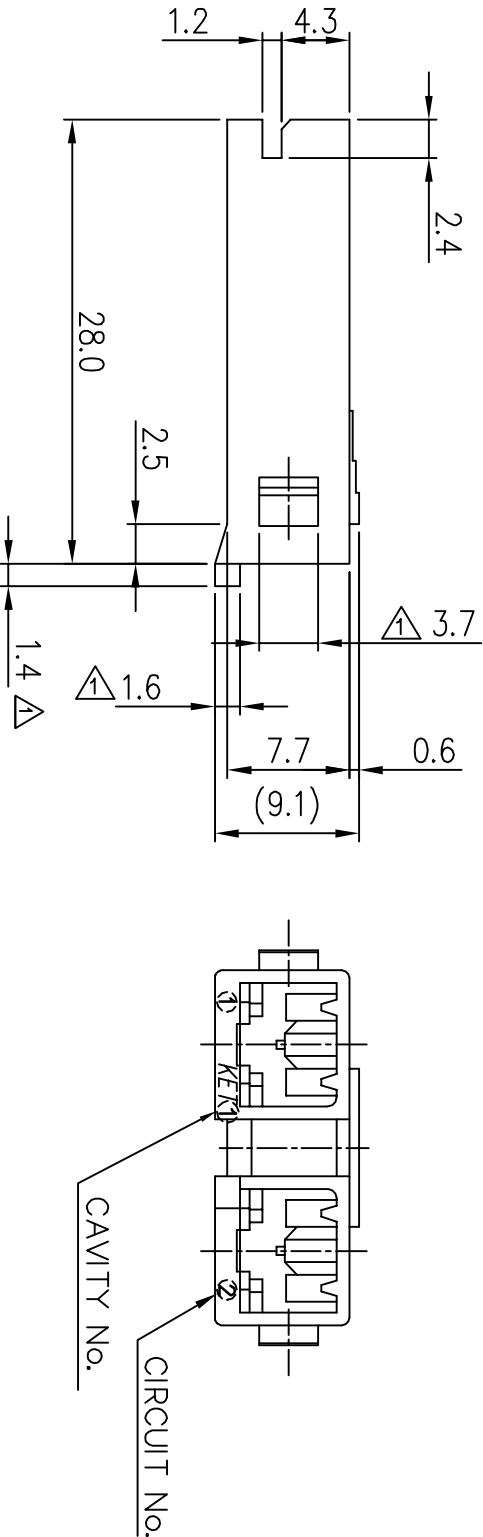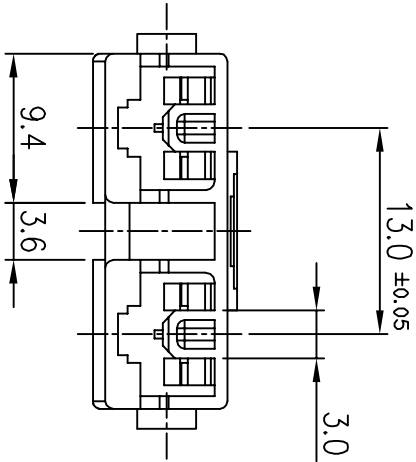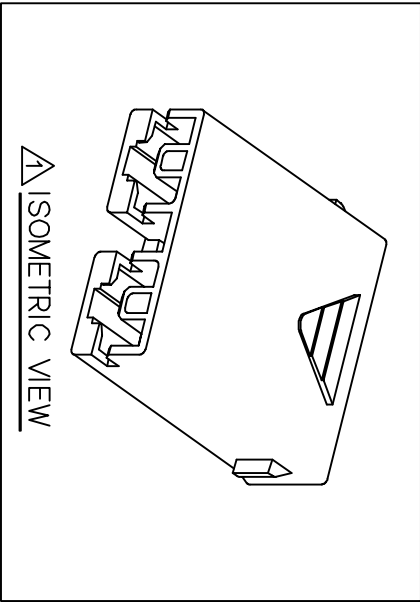

1.기능상 우해한 BURR 및 WELDLINE등이 없을것.

2. 적용 단자 : ST730570-3, 571-3

3. 제 품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬

PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정된 최대 허용농도를 초과해서는 안 된다.

4. 적용 R/HOLDER : MG634825

ISSUE MARK

2 3 4		
구분	PART NO.	MATERIAL
1	MG634108	PA66(V0)
2	MG634108T	PET+PC(GW1T)

					MATERIAL	SEE TABLE	KIET KOREA ELECTRIC TERMINAL CO., LTD. [ENGINEERED]
△	ECO-1409-113 근거 제작성	LCM	BUC	'14.09.19	FINISH	NATURAL	
△	ECO-1109-129 근거 수월	LCM	KSH	'11.09.09			
△	설계사양변경(S10007)2근가 도면 제작성	PJM	KSH	'10.03.31	WIRE RANGE	CLASS .250	
△	설계사양변경(S09031) 근거 도면 수월	CJH		'09.05.29	INSULATION	TYPE P-LOCK	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE		
DR.	P.J.M '07.12.24	CHK.			12/27	TOLERANCE EXCEPT AS NOTED	PART NO. △ MG634108 / MG634108T
CHK.		APP.			12/27	PART NAME	
250 P-LOCK 2P HS'G(P=13mm) NOISE FILTER							