

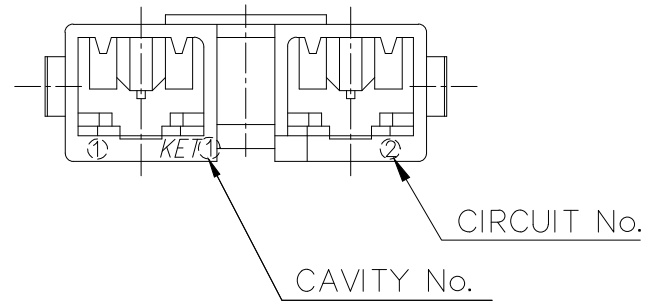
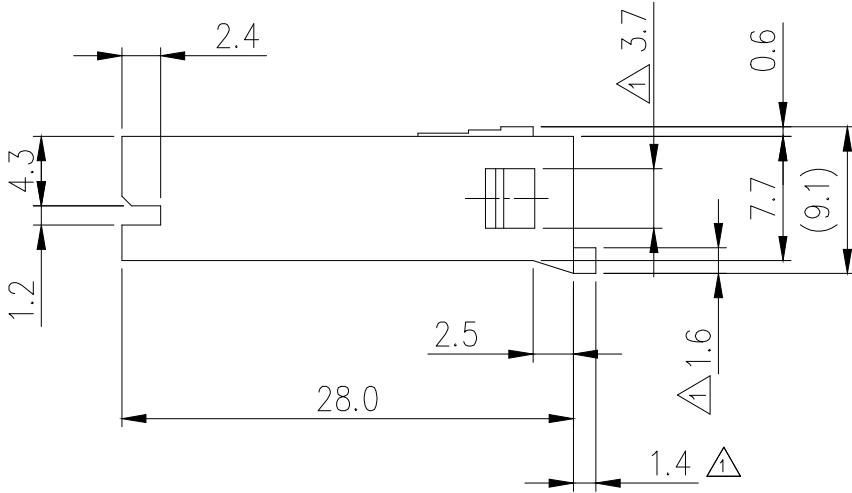
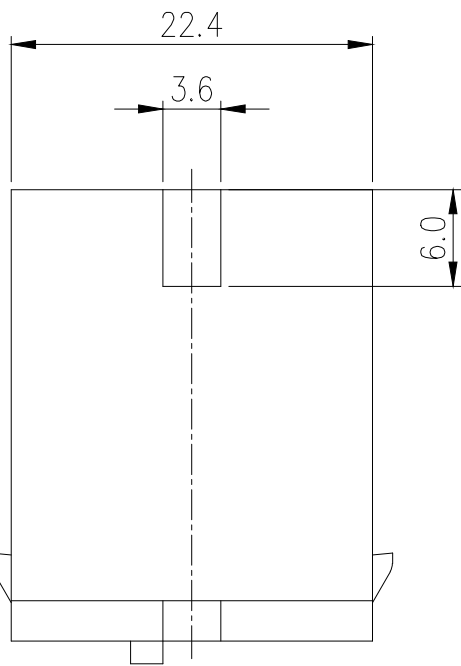
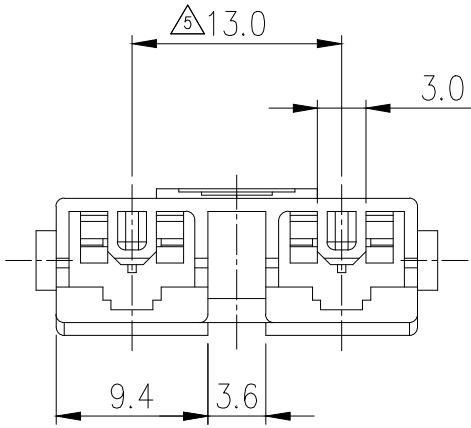


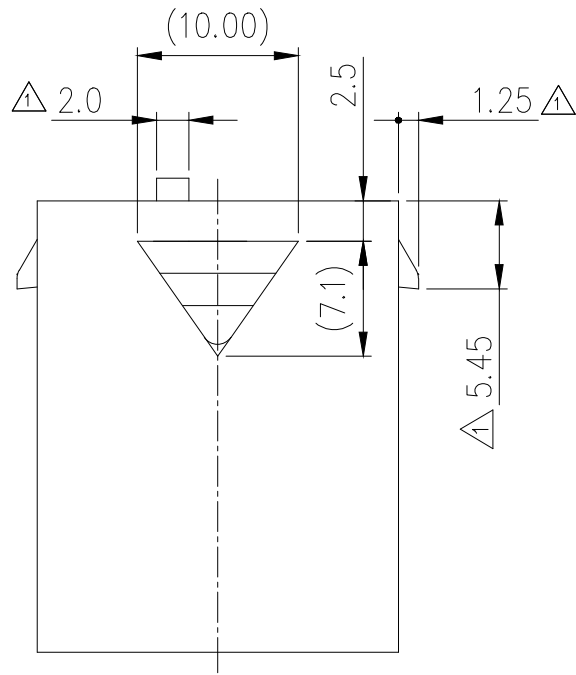

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE TERMINAL :ST730570-3,571-3
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
4. APPLICABLE R/HOLDER : MG634825

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

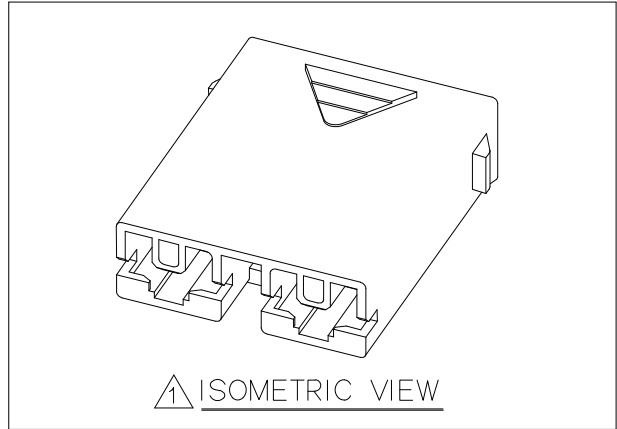

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 단자 :ST730570-3,571-3
- 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.
4. 적용 R/HOLDER : MG634825

구분	PART NO.	MATERLAL
1	MG634108	PA66(V0)
2	MG634108T	PET+PC(GWIT)

5	ECO-1611-330 근거 도면 재작성	SMG	KSH	BUC	'16.11.21	MATERIAL SEE TABLE		 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
4	ECO-1409-113 근거 도면 재작성	LCM	KSH	BUC	'14.09.19	FINISH NATURAL		
3	ECO-1109-129 근거 수정	LCM	KSH	7/11	'11.09.09	WIRE RANGE		CLASS .250
2	설계사양변경(S100072)근거 도면 재작성	PJM	7/10		'10.03.31	INSULATION		TYPE P-LOCK
1	설계사양변경(S090131) 근거 도면 수정	CJH	7/09	7/09	'09.05.29	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1
LTR REVISION RECORD		DR.	CHK.	APP.	DATE	PART NO.		3
DR. P.J.M '07.12.24		CHK.	7/12		12/27	MG634108 / MG634108T		
CHK.		APP.	7/12		12/27	PART NAME		
250 P-LOCK 2P HS'G(P=13mm) NOISE FILTER								

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK