



GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDes) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- △△3. APPLICABLE R/HOLDER : MG634746 (AMP TERMINAL ONLY)
- △4. APPLICABLE TERMINAL : ST730135

주 기

- 1.기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDes)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- △△3.적용 R/HOLDER : MG634746 (AMP 단자용)
- △4.적용 TERMINAL: ST730135

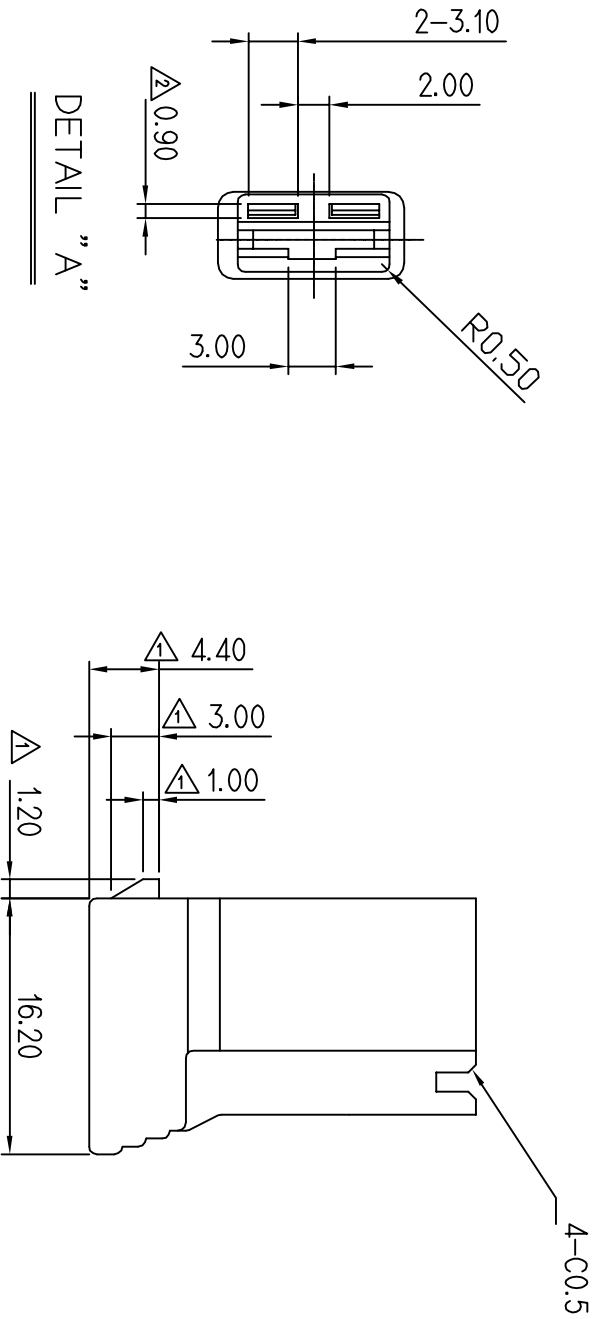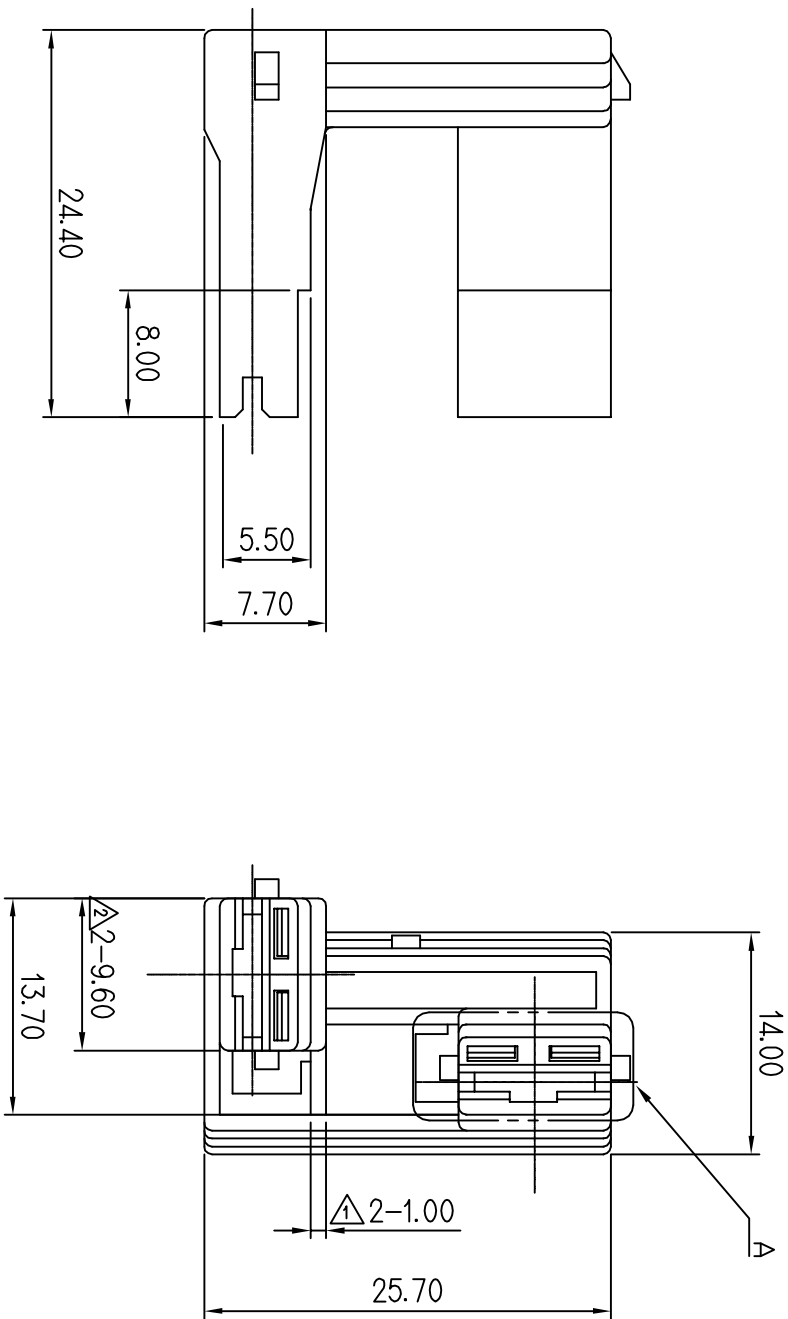

						MATERIAL	PA66(V0)	ISSUE MARK KOREA ELECTRIC TERMINAL CO., LTD. [ENGINEERED]		
						FINISH	NATURAL			
						WIRE RANGE				
						INSULATION				
						CLASS	250			
△	ECO-1210-130 근거 수정				12.10.20			TYPE		
△	설계시정변경시(S090061)근거 수정	PSH HAK	BUC		09.05.06					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE AS NOTED	SEE TABLE	SCALE	2/1	PART NO.
DR.	PSH, 08.01.16	CHK.	HAK			PART NAME	250 2P HOUSING (RELAY S/W용)			MG634155
CHK.		APP.	BAEK							