PART NO. MG634155C-*02

CUSTOMER DRAWING

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	( )	
±0.25	±0.35	±0.55	±0.95	±1.0	

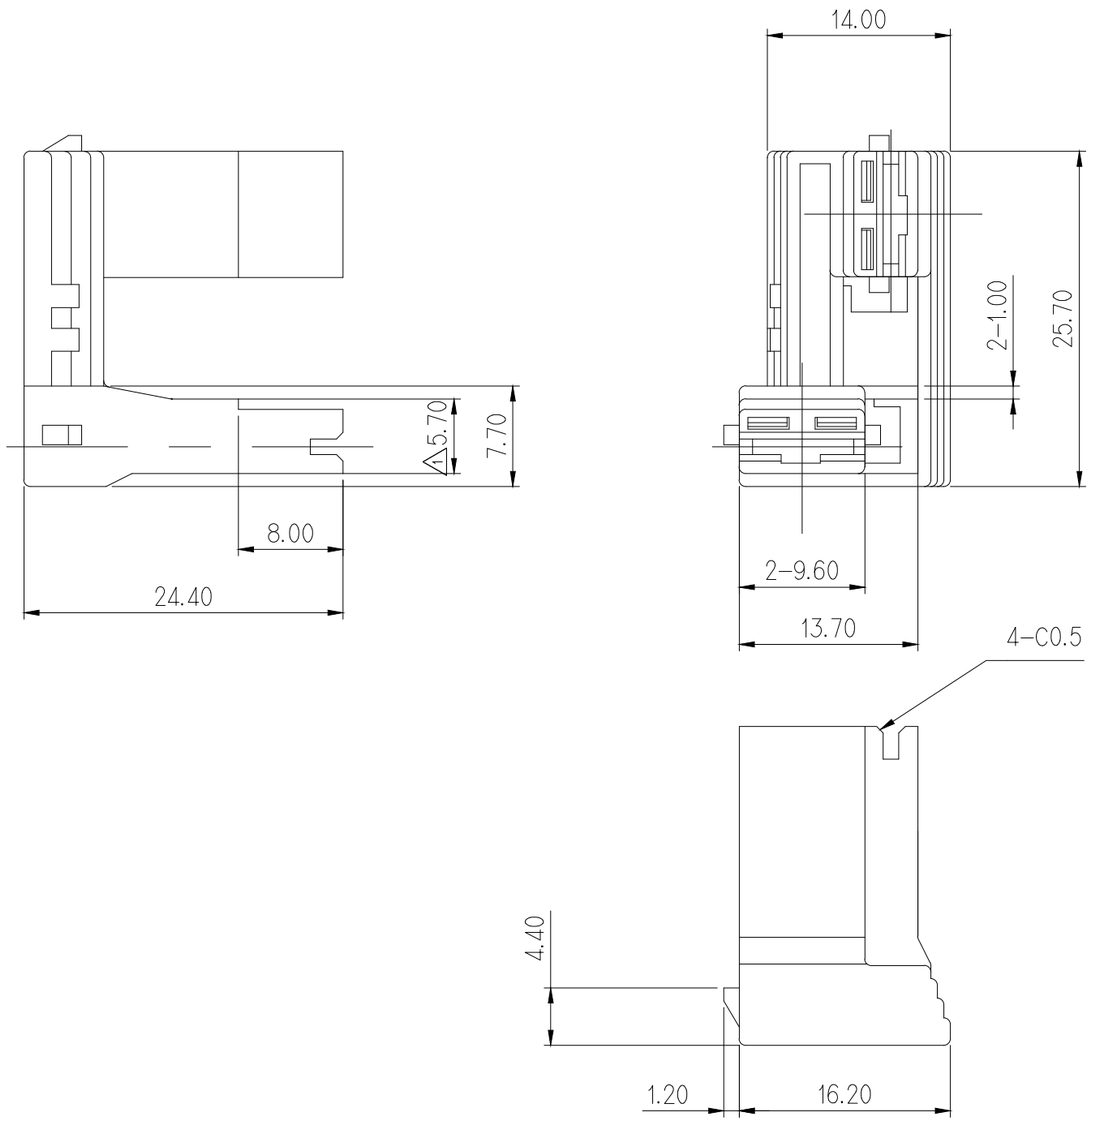

PART NO. *표시는 색상 표기임.

	NO.	COLOR
*	0	NATURAL
	1	RED
	2	BLUE
	3	YELLOW
	4	GRAY
	5	BLACK
	6	GREEN

NOTE

1. MUST BE FREE OF FLASH, BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
3. APPLICABLE TERMINAL : ST730135-3, TE-41728
   APPLICABLE R/HOLDER : MG634746(TE-41728 ONLY)
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1.기능상 유해한 FLASH, BURR, WELDLINE 없을 것
2.지시하지 않은 모든 R은 0.3R.
3.적용 TERMINAL : ST730135-3, TE-41728
적용 R/HOLDER : MG634746(TE-41728 전용)
4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED
2019-11-06
KOREA ELECTRIC TERMINAL CO., LTD. Electronic Produc t Development Team

ISSUE MARK

LTR	REVISION RECORD	DR. / CHK.	APP.	DATE
1	ECO-1807-046 근거 도면 재작성	YHJ / KSH	BUC	'18.07.03

DR.	LYS '17.11.01	CHK.	PSH '17.11.01
CHK.	KSH '17.11.01	APP.	BUC '17.11.01

MATERIAL	1 PA66/6(GWIT)	KOREA ELECTRIC TERMINAL CO., LTD.	
FINISH	SEE TABLE		
WIRE RANGE		CLASS	250
INSULATION		TYPE	
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG634155C-*02
PART NAME	250 2P HOUSING (RELAY S/W용)		

(DIMENSIONS IN MM.)