
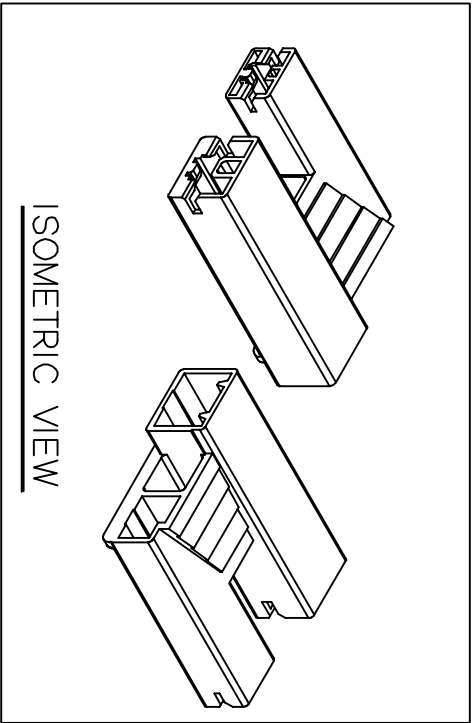
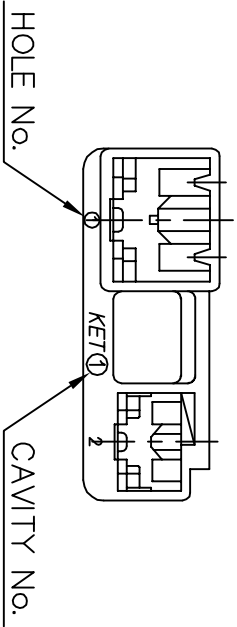
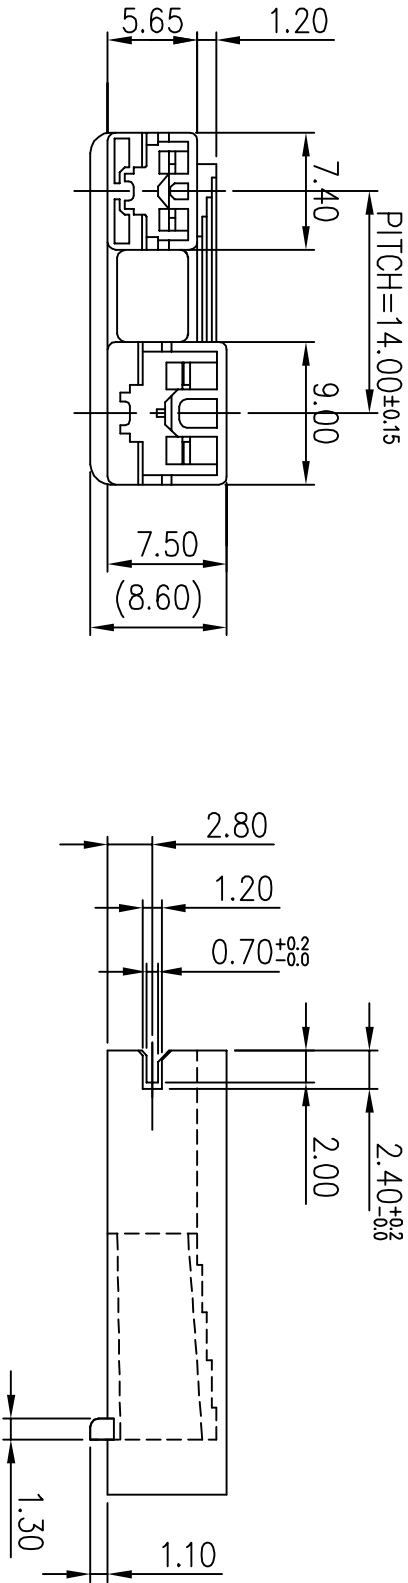


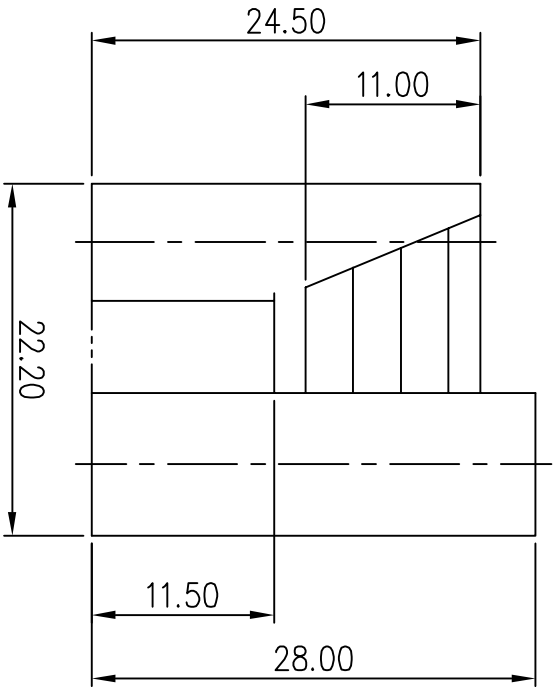

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30°	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL :

- 250 TYPE : ST730570-3,571-3,572-3
- 187 TYPE : ST730567-3,568-3,569-3
- 3. GHAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

						MATERIAL	PBT(V0)	KIEIT KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH	NATURAL	
						WIRE RANGE		
						INSULATION		
						CLASS	250/187	
						TYPE	P-LOCK	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG634407
DR.	P.J.M '08.08.29	CHK.				PART NAME	2518 P-LOCK 2P HS'G (P=14mm)	
CHK.		APP.						

ISSUE MARK