
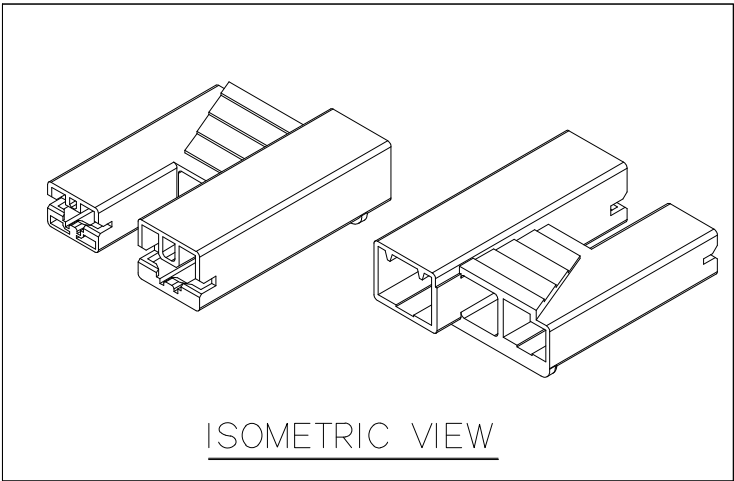
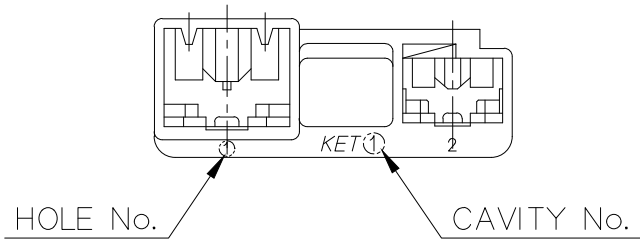
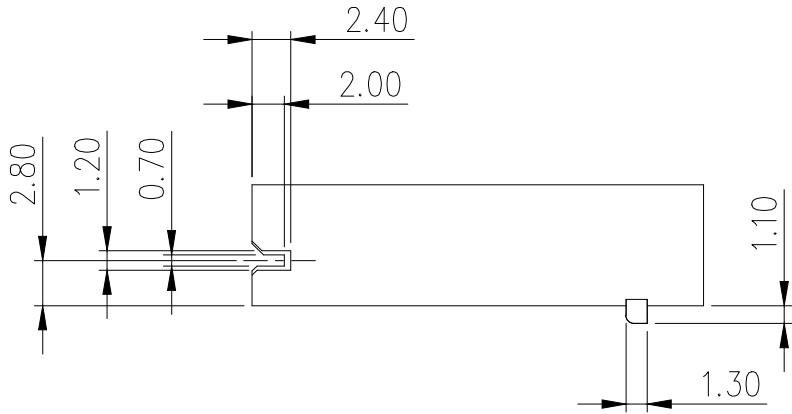


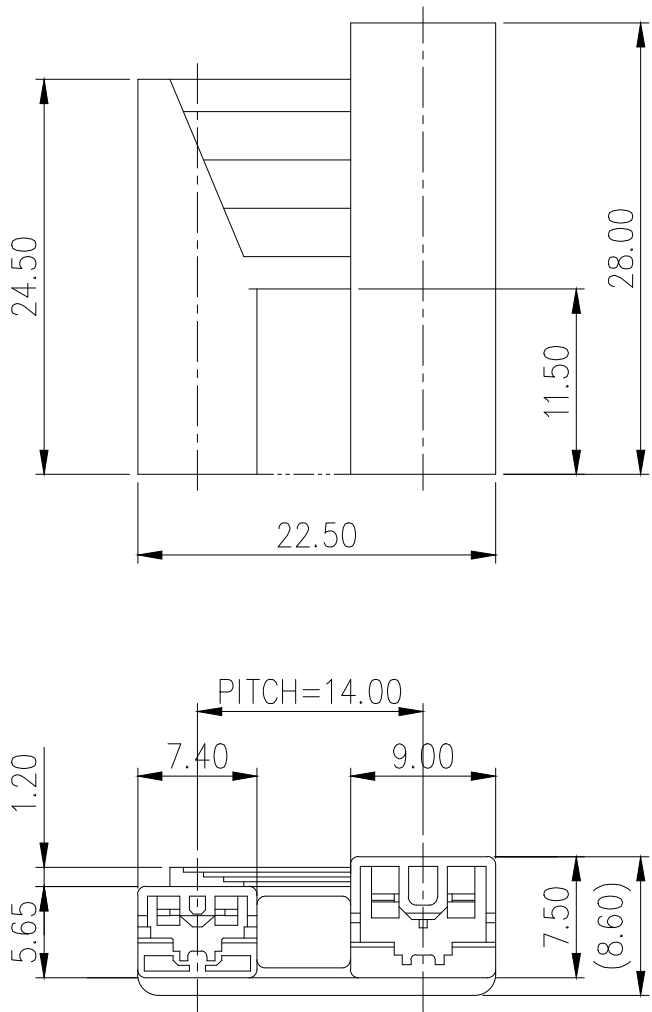

ISOMETRIC VIEW

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL
250 TYPE : ST730570-3.571-3,572-3
187 TYPE : ST730567-3,568-3,569-3
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 터미널
250 TYPE : ST730570-3.571-3,572-3
187 TYPE : ST730567-3,568-3,569-3
- 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

PART NO. *표시는 색상 표기임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL	PET+PC(GWIT)	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE	CLASS	
					INSULATION	TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NO.
							MG634407T- *02
DR.	LYS '17.11.01		CHK.	PSH '17.11.01		TOLERANCE EXCEPT AS NOTED	SCALE
CHK.	KSH '17.11.01		APP.	BUC '17.11.01		PART NAME	2518 P-LOCK 2P HS'G (P=14mm)