
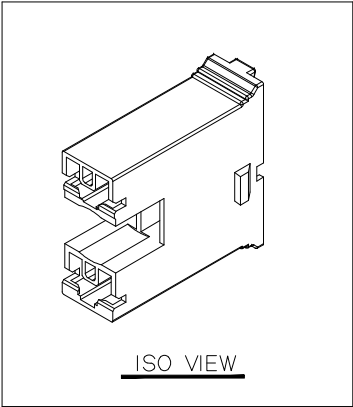
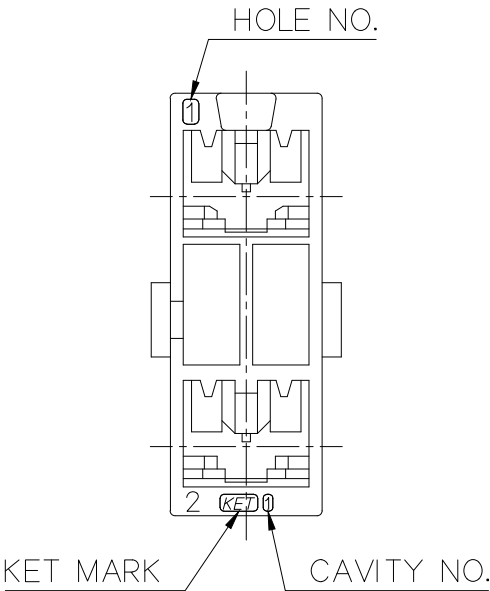
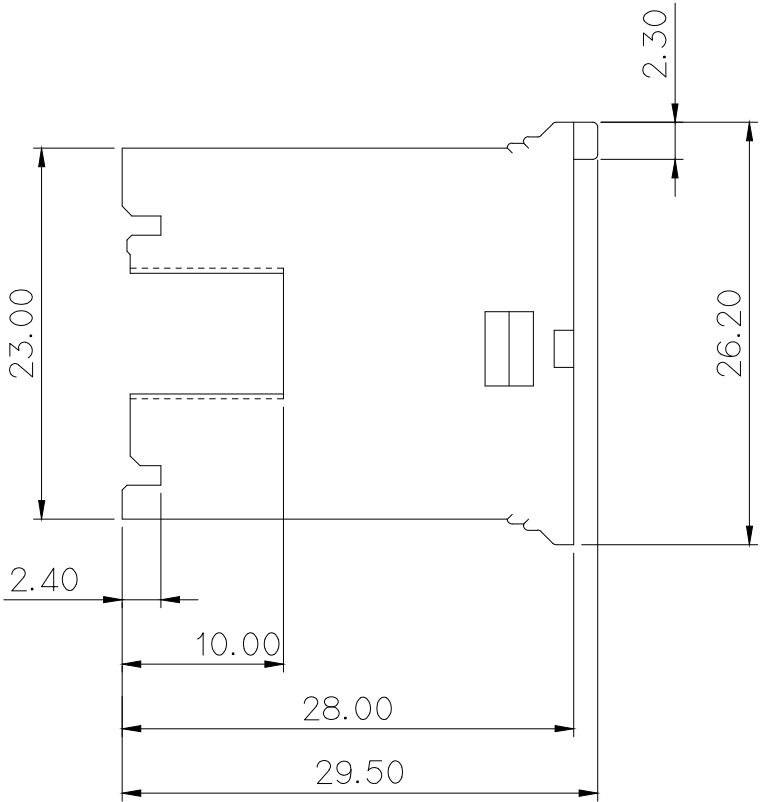
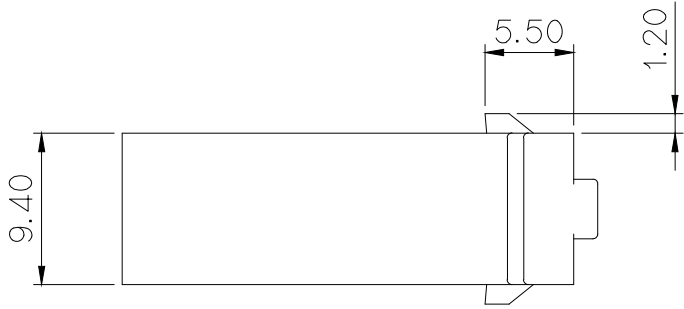


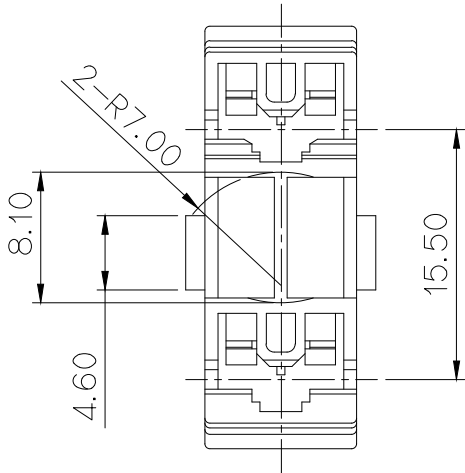

주 기

- 1.지시 하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 TERMINAL:ST730570-3/0571-3/0572-3
적용 R/HOLDER : MG633659-1
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- 1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.2-0.3 RADIUS.
- 2. MUST BE FREE OF BURR, WELD LINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 3. APPLICABLE TERMINAL: ST730570-3/0571-3/0572-3
- 4. APPLICABLE R/HOLDER : MG634456-2
- 5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO. *표시는 색상 표기 임.

*

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

						MATERIAL		PET+PC(G.W.I.T)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE			
						WIRE RANGE		CLASS			
						INSULATION		TYPE .250			
	ECO-1711-145 근거 도면 재작성		LCM	KSH	BUC	'17.11.13					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE		TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG634455- *02
DR. CJH 2008.08.11			CHK. Hak		'08/08/11		PART NAME 250 P-LOCK 2F HSG				
CHK.			APP. 		'08/08/11						