

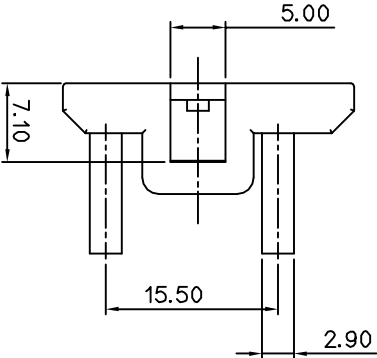
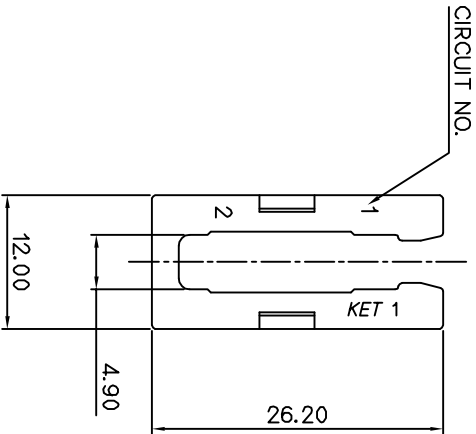


DIMENSIONS IN MM

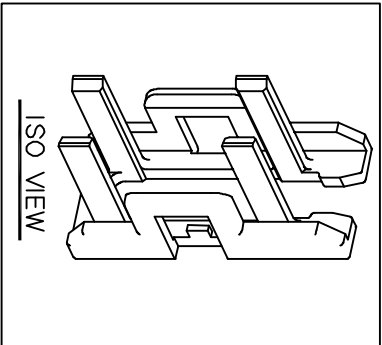

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.지시하지 않은 반경 R은 0.3으로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 TERMINAL: ST730570-3, ST730571-3
- 5.적용 HOUSING : MG634455
- 6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE TERMINAL : ST730570-3, ST730571-3
5. APPLICABLE HOUSING : MG634455
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

					MATERIAL	PAG6(V0)	KEI KOREA ELECTRIC ENGINEERING TERMINAL CO., LTD.
					FINISH	BLUE	
					WIRE RANGE		
					INSULATION		
						TYPE	
						.250	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE AS SHOWN	PART NO.
DR	CJH 2008.08.11	CHK	Hok		'08/08/11	SEE TABLE	2/1
CHK		APP.	<i>W. Lee</i>		'08/08/11	PART NAME	250 P-LOCK 2F HSG R/HOLDER