
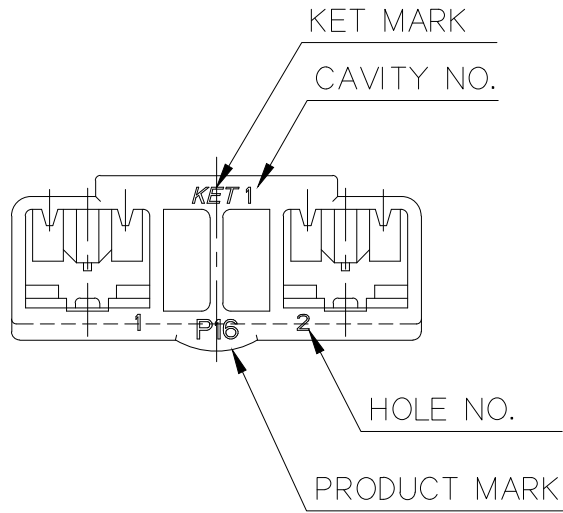
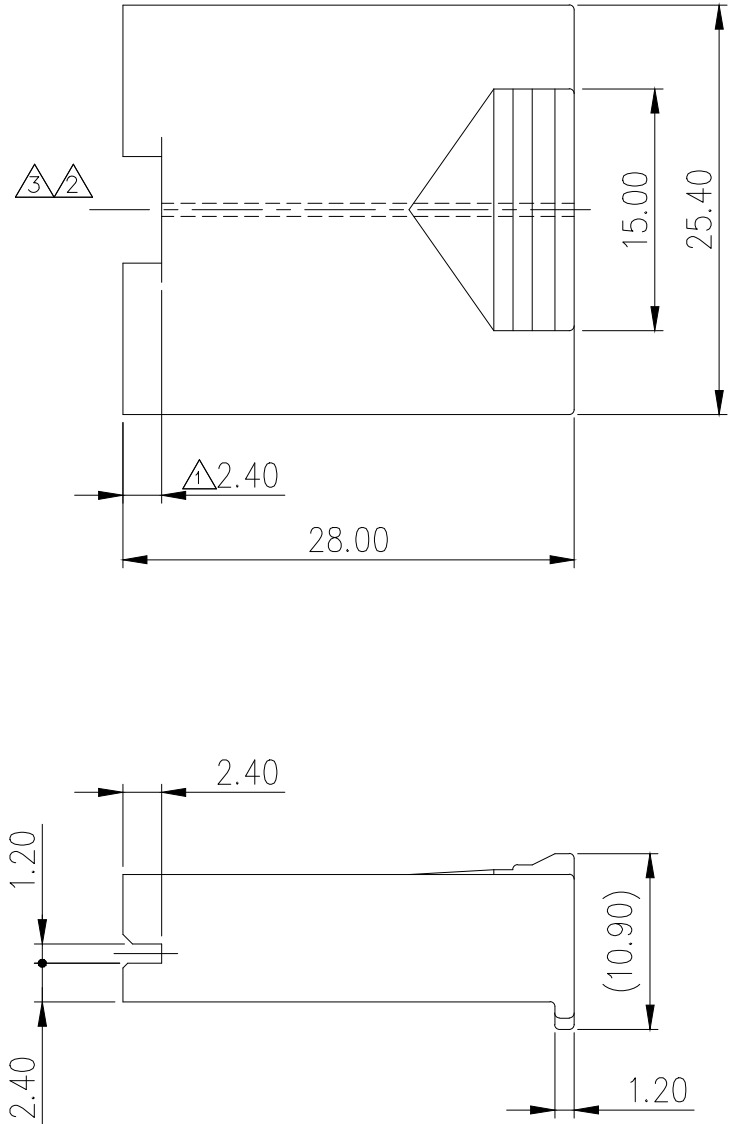


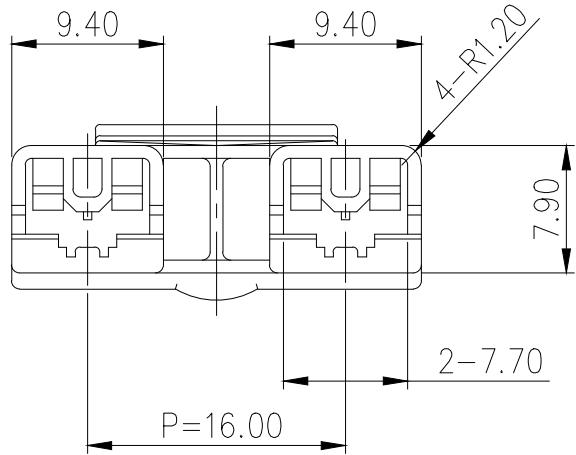

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730570-3,571-3,572-3
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용단자 : ST730570-3,571-3,572-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

					MATERIAL PA66 (V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
	ECO-1212-015근거 도면 재작성	PSH 		'12.12.04	WIRE RANGE		CLASS	.250
	ECO-1209-014근거 도면 재작성	KSJ 		'12.09.03	INSULATION		TYPE	P-LOCK
	ECO-1205-180근거 도면 재작성	KSJ 		'12.05.29	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. MG634620
LTR	REVISION RECORD	DR.	CHK.	APP.				
DR. P.J.M '09.02.23		CHK. 		2/23	PART NAME			
CHK.  2/24		APP. 		2/24	250 P-LOCK 2P HS'G (P=16mm)			

APPROVED

2016-08-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK