
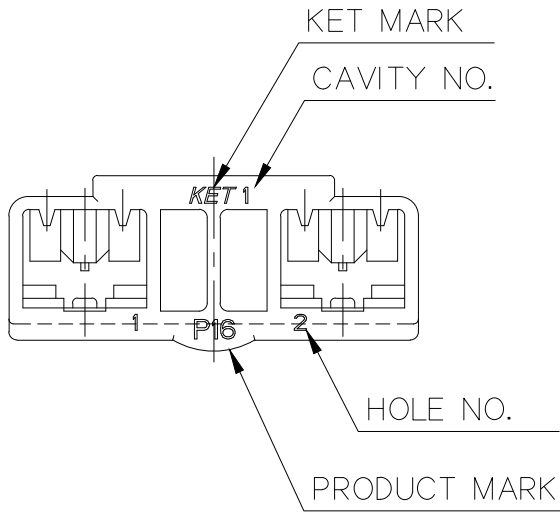
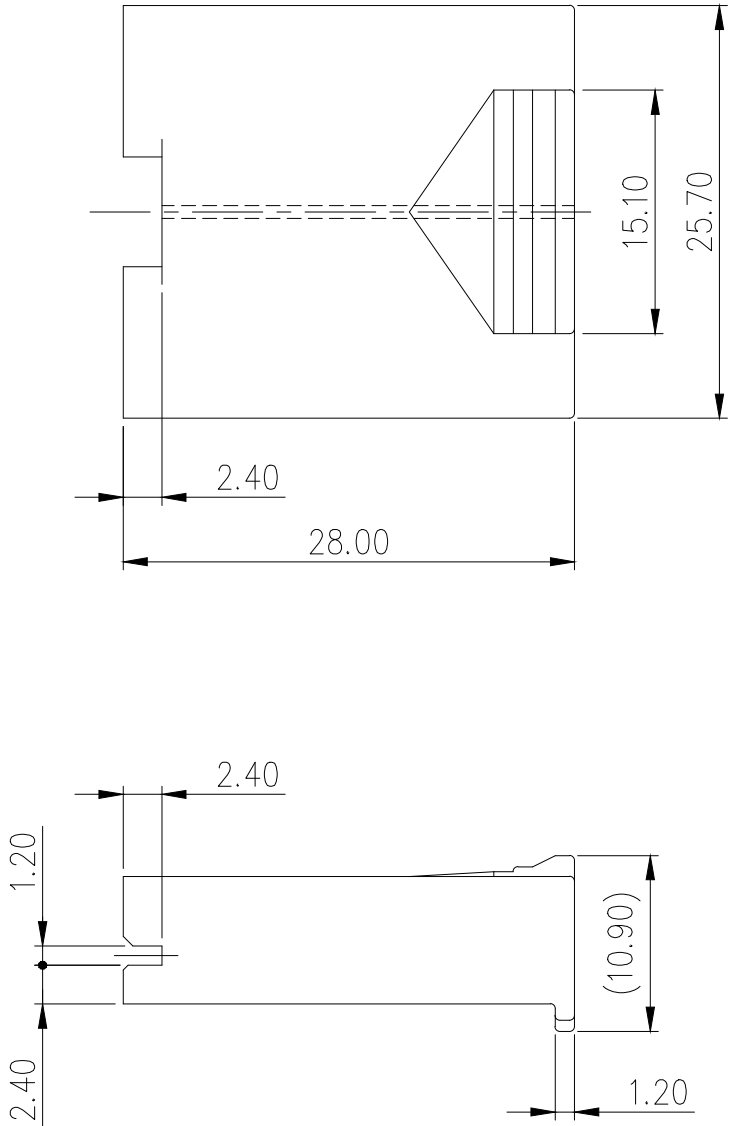


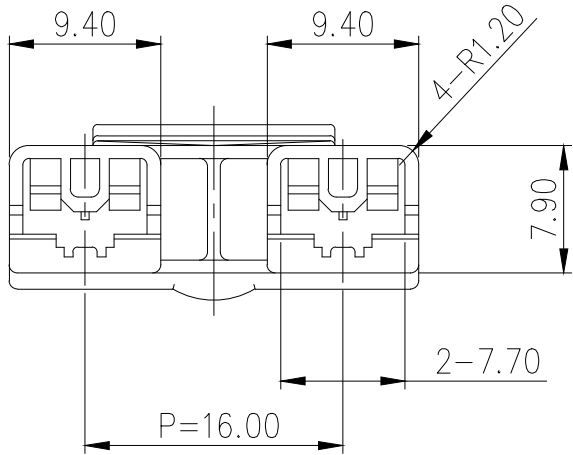

| GENERAL TOLERANCE (HOUSING) |       |       |       |        | USED ON |
|-----------------------------|-------|-------|-------|--------|---------|
| 10MAX                       | 20MAX | 45MAX | ANGLE | ECCENT |         |
| ±0.2                        | ±0.25 | ±0.3  | ±30'  | 0.1    |         |

| NO. | MATERIAL         | FINISH  |
|-----|------------------|---------|
| 0   | PET+PC<br>(GWIT) | NATURAL |
| 1   |                  | RED     |
| 2   |                  | BLUE    |
| 3   |                  | YELLOW  |
| 5   |                  | BLACK   |

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730570-3,571-3,572-3
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용단자 : ST730570-3,571-3,572-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

|                   |                 |  |                    |      |      |                             |                                 |              |                                                                                                                            |           |
|-------------------|-----------------|--|--------------------|------|------|-----------------------------|---------------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------|-----------|
|                   |                 |  |                    |      |      | MATERIAL                    |                                 | SEE TABLE    |  KOREA ELECTRIC<br>TERMINAL CO., LTD. |           |
|                   |                 |  |                    |      |      | FINISH                      |                                 | SEE TABLE    |                                                                                                                            |           |
|                   |                 |  |                    |      |      | WIRE RANGE                  |                                 | CLASS        |                                                                                                                            | .250      |
|                   |                 |  |                    |      |      | INSULATION                  |                                 | TYPE         |                                                                                                                            | P-Lock    |
| LTR               | REVISION RECORD |  | DR.                | CHK. | APP. | DATE                        | TOLERANCE<br>EXCEPT<br>AS NOTED | SCALE<br>2/1 | PART NO.                                                                                                                   | MG634620T |
| DR. PSH '15.02.27 |                 |  | CHK. KSH '15.02.27 |      |      | PART NAME                   |                                 |              |                                                                                                                            |           |
| CHK.              |                 |  | APP. BUC '15.02.27 |      |      | 250 P-Lock 2P HS'G (P=16mm) |                                 |              |                                                                                                                            |           |

APPROVED

2016-03-11

KOREA ELECTRIC  
TERMINAL CO., LTD.  
Electronic Produc  
t Development Team

ISSUE MARK