


GENERAL TOLERANCE (HOUNG)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730570-3, ST730571-3
3. APPLICABLE HOUSING : MG633814, MG634108
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION.

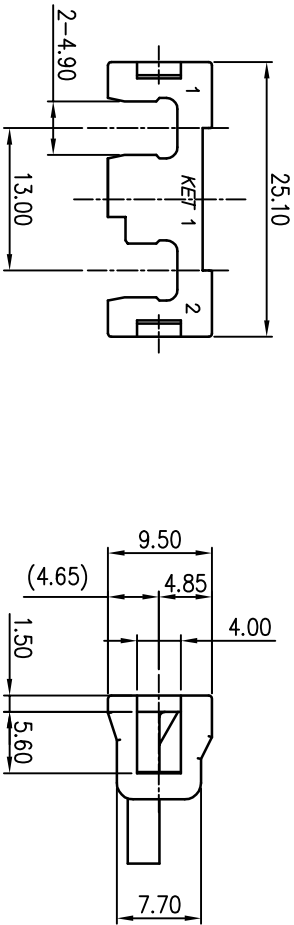

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.작용 TERMINAL: S1730570-3, S1730571-3
- 3.작용 HOUSING : MG633814, MG634108
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정된 최대 허용 농도를 초과해서는 안된다.

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.									
2. 적용 TERMINAL: ST730570-3, ST730571-3									
3. 적용 HOUSING : MG633814, MG634108									
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서									
지정한 최대 허용 농도를 초과해서는 안된다.									
						ISSUE MARK			
						MATERIAL PAg6 (V0)			
						FINISH RED			
						WIRE RANGE			
						INSULATION			
						SCALE 2/1			
						PART NO. MG634825			
						RESIDUAL STRENGTH OF THERMO			
						SEE TABLE			
						PART NAME			
						250 P-LOCK 2F R/HOLDER(HZT)			