


△GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	







ISO VIEW

주 기

- 1.적용 TERMINAL: ST730190
- 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

KET MARK & CAVITY NO.

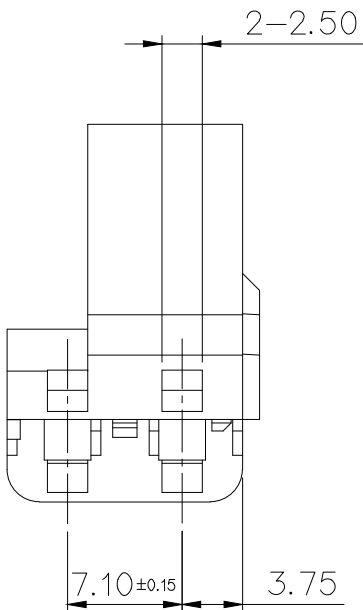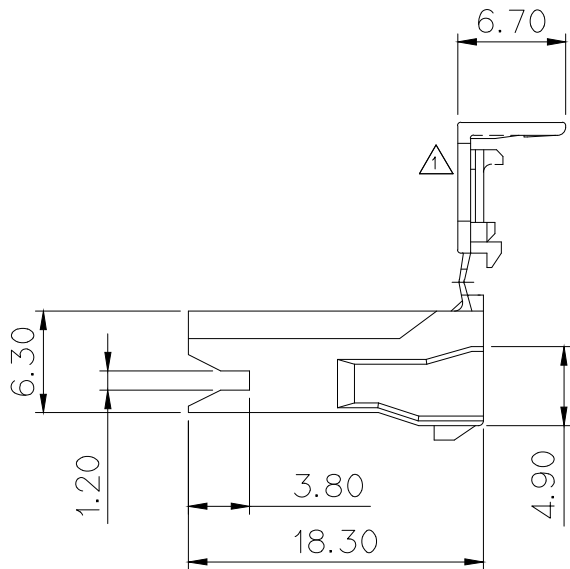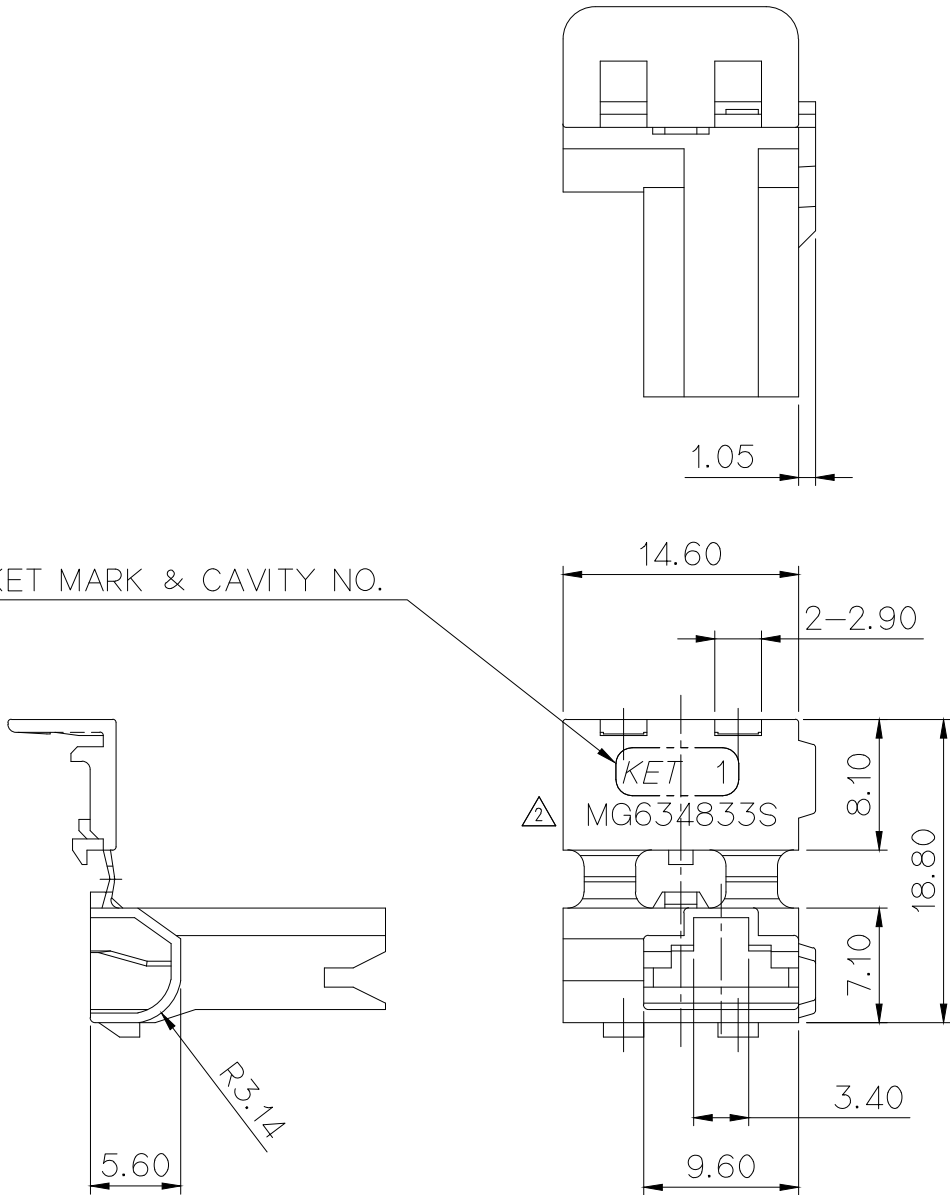

NOTE

1. APPLICABLE TERMINAL : ST730190
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

						MATERIAL PA66(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH NATURAL			
△3	ECO-1708-049 근거 도면 재작성	LCM	KSH	BUC	'17.08.08	WIRE RANGE			CLASS 250 SERIES
△2	ECO-1305-163 근거 수정	PSH	KSH	BUC	'13.05.29	INSULATION		TYPE	
△1	설계사양변경(S100039)근거 수정				'10.02.26	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. MG634833S
LTR REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME		250 1P FLAG HOUSING(FASTON)	
DR.  10.02.01		CHK. 		2/1					
CHK.		APP. 		2/1					