

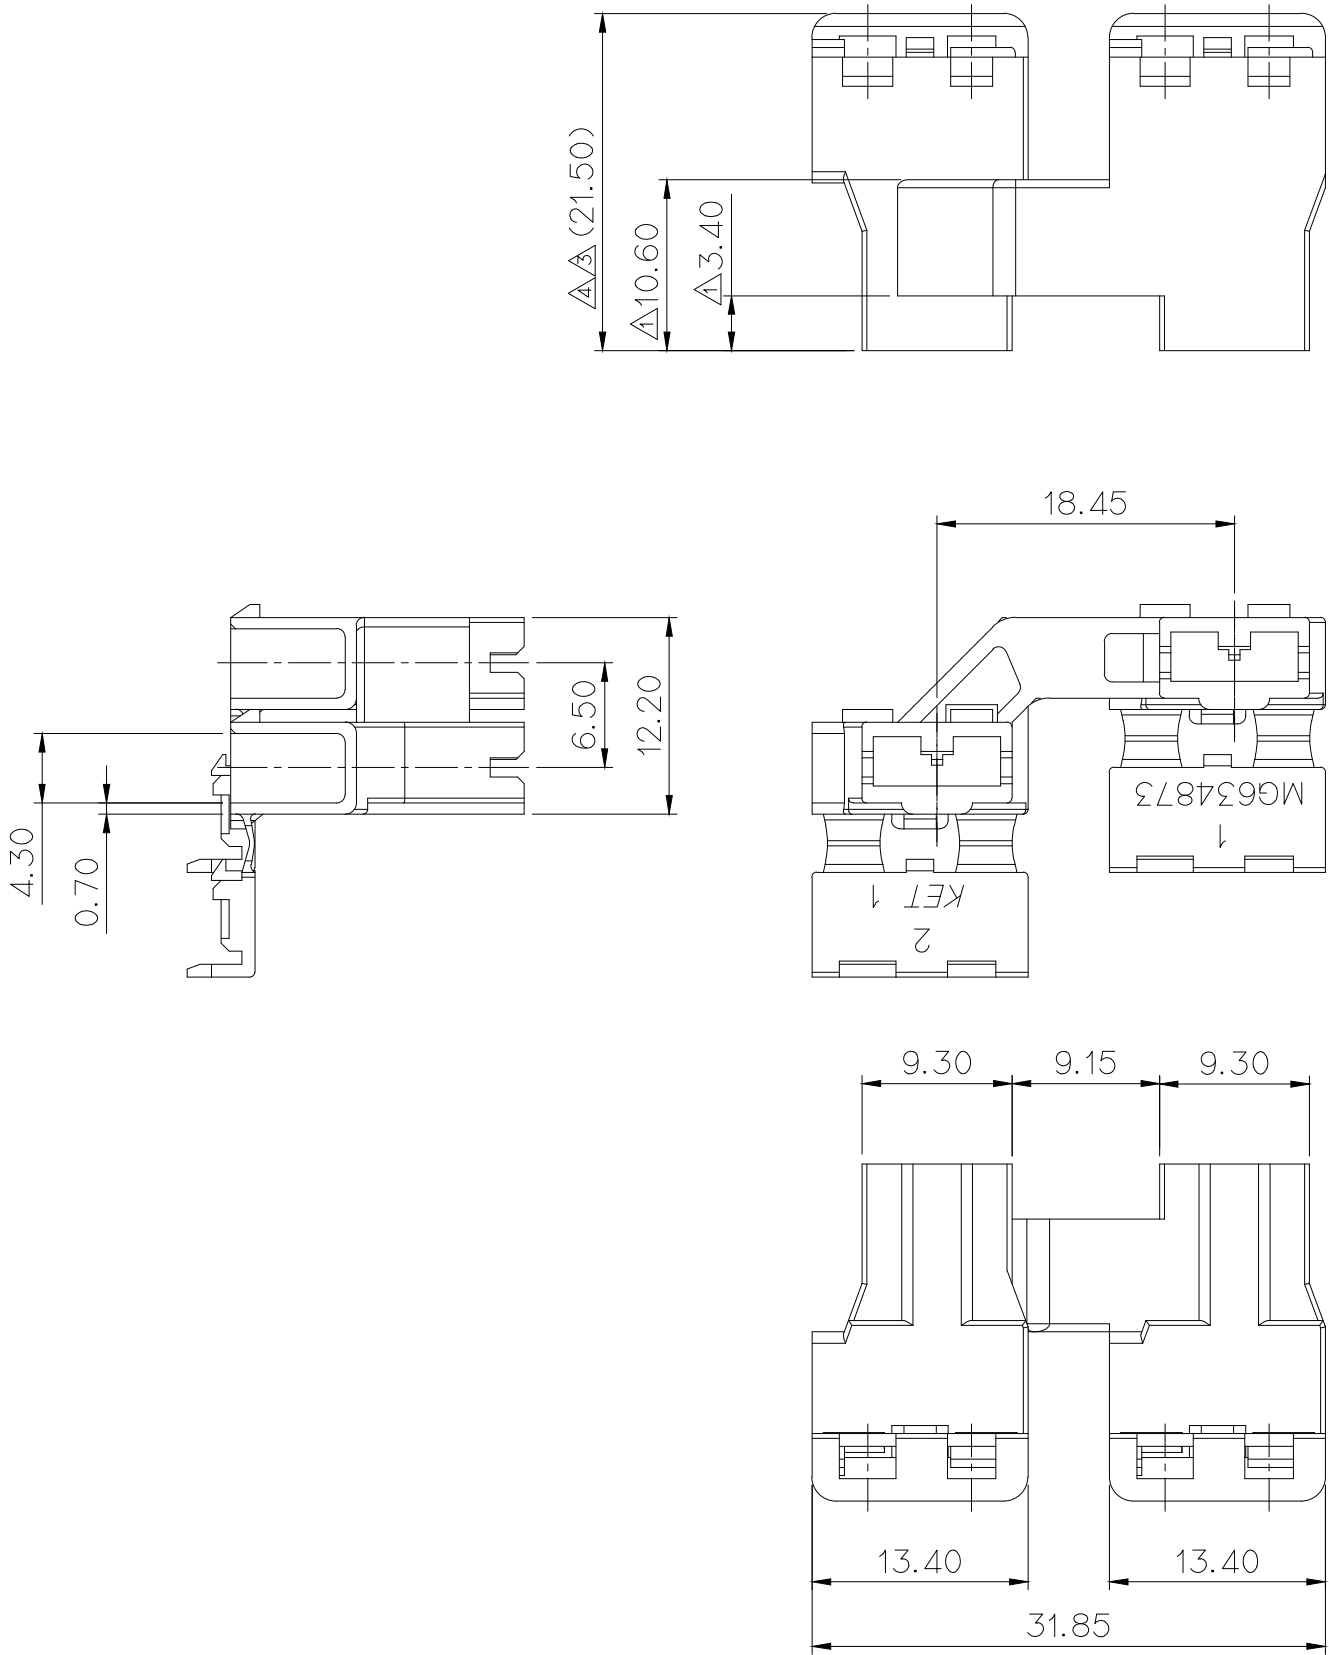


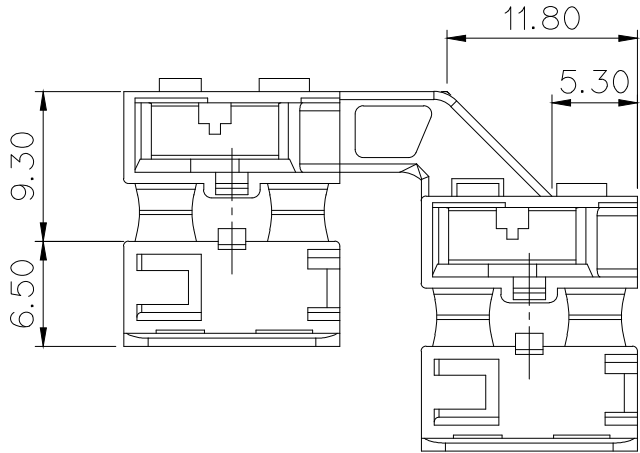

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730649-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

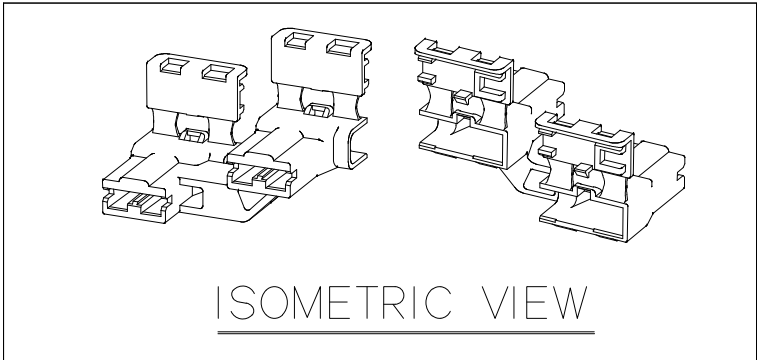

NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST730649-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



ISSUE MARK

					MATERIAL PA66(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.		
	ECO-1908-243근거 도면 수정	SMG KSH	KHG	'19.08.22	FINISH NATURAL				
	ECO-1610-081근거 도면 수정	SMG KSH		'16.10.07	WIRE RANGE		CLASS	250	
	ECO-1503-025근거 도면 수정	PSH KSH		'15.03.02	INSULATION		TYPE		
	설계사양변경(S110046)의거 수정	KSH		'11.02.10					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG634873
DR. KSH '10.01.15		CHK. CSH		'10.01.15		PART NAME			
CHK.		APP. BUC		'10.01.15		250 P-Lock FLAG 2P HOUSING(HINGE)			