
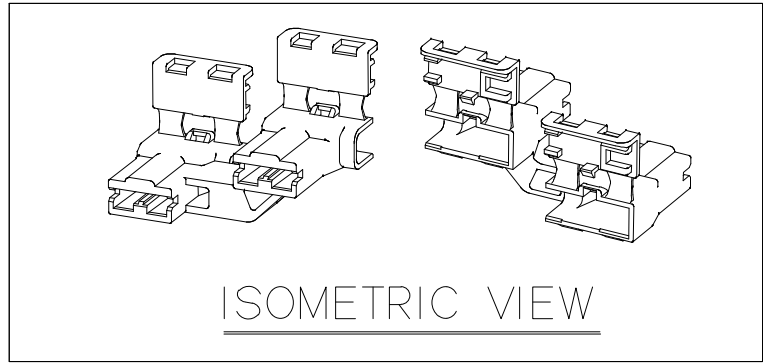
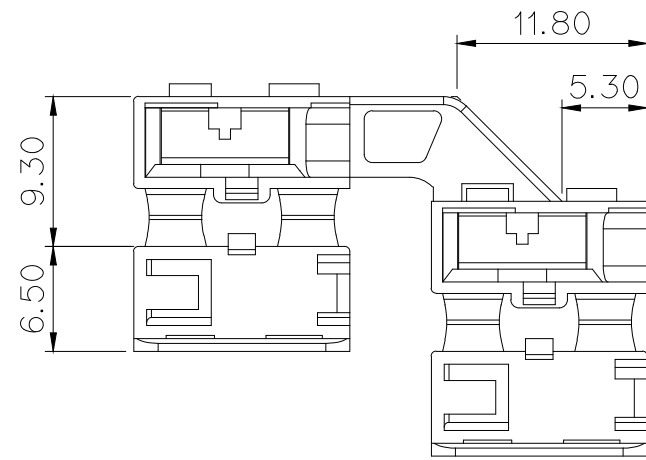
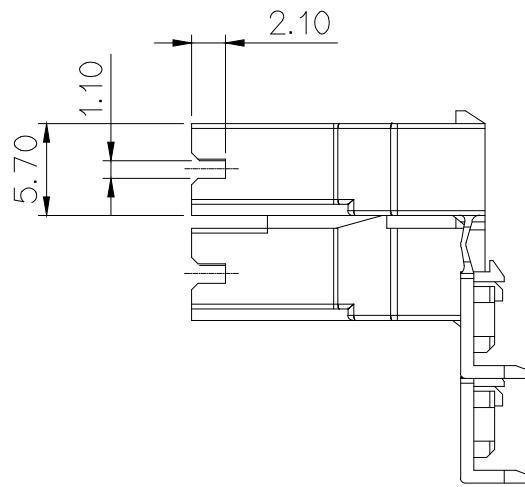
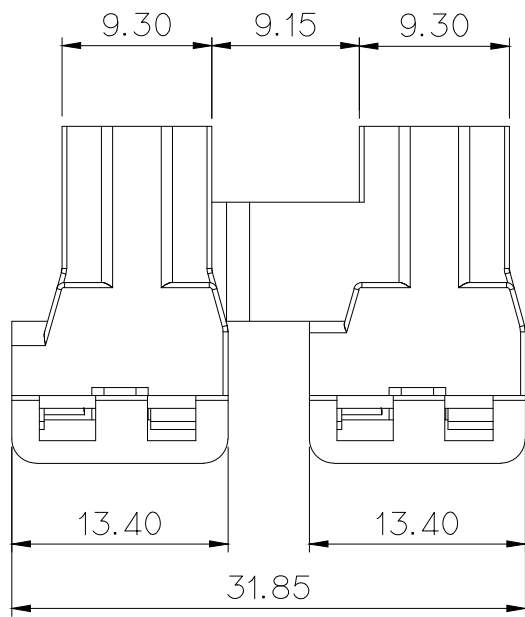
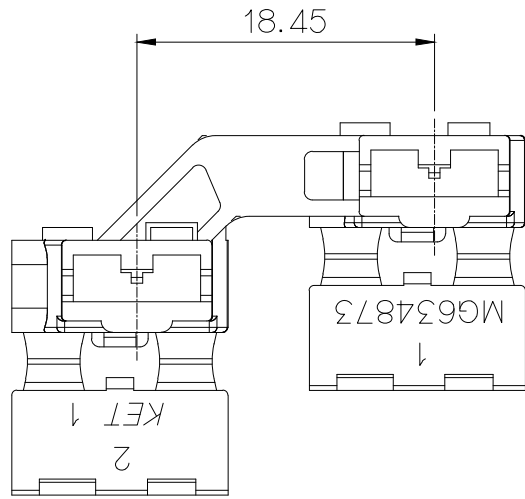
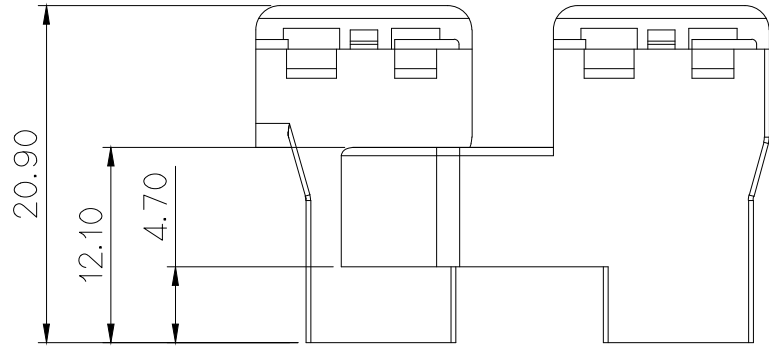


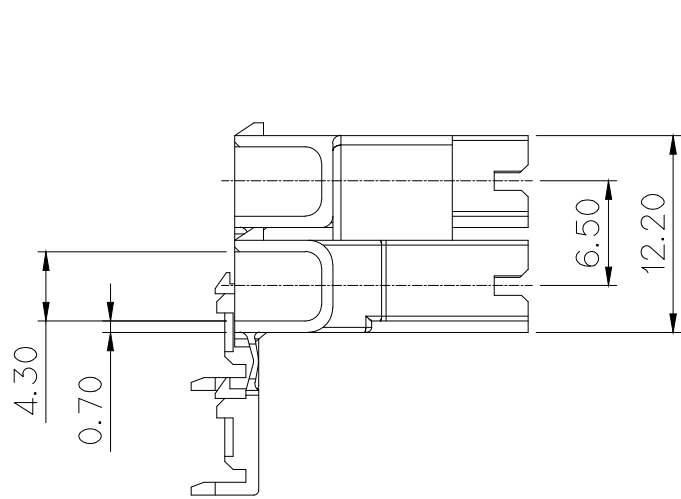

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730649-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

①		
NO.	MATERIAL	COLOR
0	PA66(V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST730649-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE		CLASS	250
					INSULATION		TYPE	
①	ECO-1509-102근거 도면 제작성	LCM	KSH	BUC	'15.09.08			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1
	DR.	LCM	'11.05.17	CHK.	KSH	'11.05.17		PART NO. MG634873K
	CHK.			APP.	BUC	'11.05.17	PART NAME	250 P-Lock FLAG 2P HOUSING(HINGE)