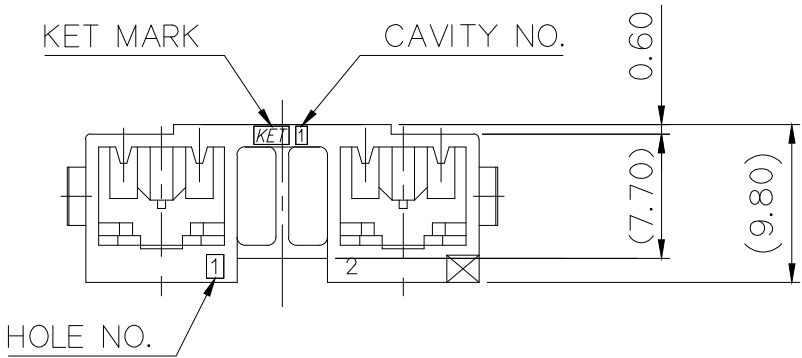
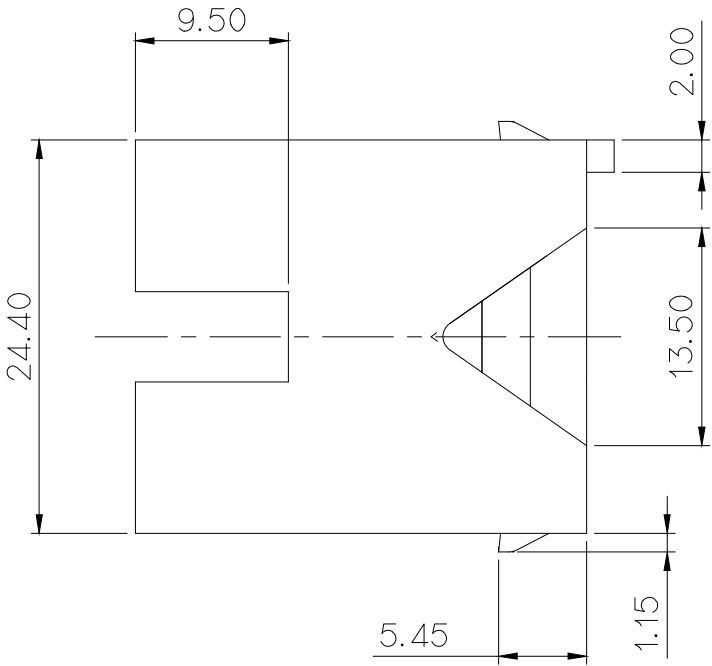
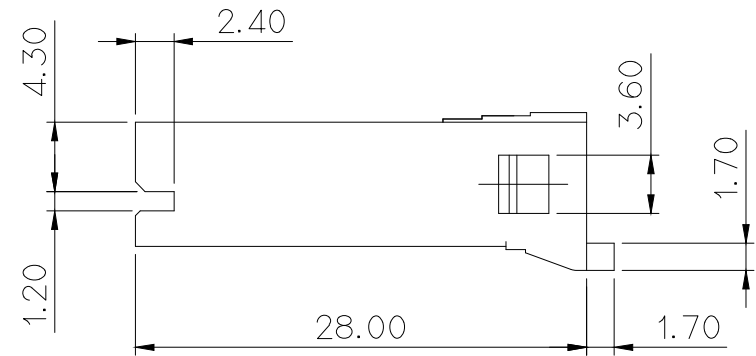
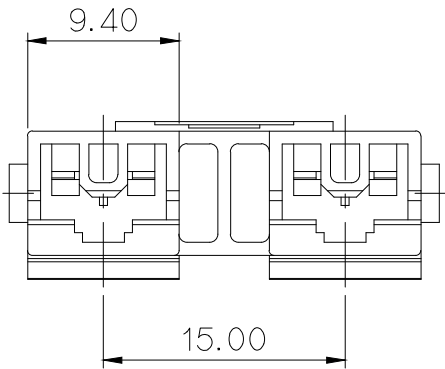


- 주 기
- 1.지시 하지 않은 반경 R은 0.2~0.3로 한다.
 - 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
 - 3.적용 TERMINAL: ST730570-3/0571-3/0572-3
적용 R/HOLDER: MG634916-2
 - 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2~0.3 RADIUS.
 2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 3. APPLICABLE TERMINAL: ST730570-3/0571-3/0572-3
APPLICABLE R/HOLDER: MG634916-2
 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,CADMIUM, HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO. *표시는 색상 표기 임.

NO.	COLOR
* 0	NATURAL
* 1	RED
* 2	BLUE
3	YELLOW
5	BLACK

						MATERIAL		PET+PC(G.W.I.T)	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
						WIRE RANGE		CLASS		.250
						INSULATION		TYPE		P-LOCK
	ECO-1711-145 근거 도면 재작성	LCM	KSH	BUC	'17.11.13	TOLERANCE EXCEPT AS NOTED		SCALE 2/1	PART NO. MG634915T-※02	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE					
DR. CJH 2009.11.16		CHK.								
CHK.	 11/18	APP.	 11/18	PART NAME						250 P-LOCK 2P HOUSING (15mm)

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK