

DIMENSIONS IN MM




GENERAL TOLERANCE (HOUSING)						USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL: ST730570-3, ST730571-3
- 3.적용 HOUSING : MG634915
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,브롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE TERMINAL : ST730570-3, ST730571-3
- 3. APPLICABLE HOUSING : MG634915
- 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

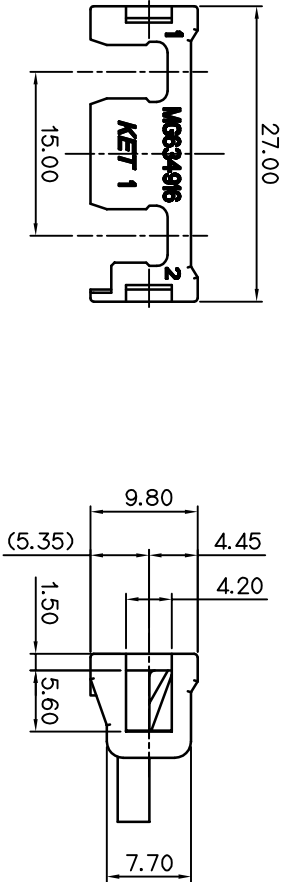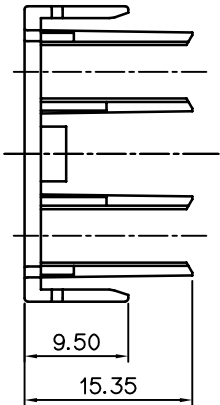

							MATERIAL	PA66(V0)	KEET KOREA ELECTRIC TERMINAL CO., LTD.
							FINISH	BLUE	
							WIRE RANGE		
							INSULATION		
								TYPE	.250
								PART NO.	MG634916
							PART NAME		250 P-LOCK 2F R/HOLDER(HZT)
DR.	CJH 2009.11.17	CHK.					REVISION RECORD SEE TABLE		
CHK.	11/18	11/18	11/18	11/18	11/18	11/18	250 P-LOCK 2F R/HOLDER(HZT)		

ISSUE MARK

KET KOREA ELECTRIC TERMINAL CO., LTD.