


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

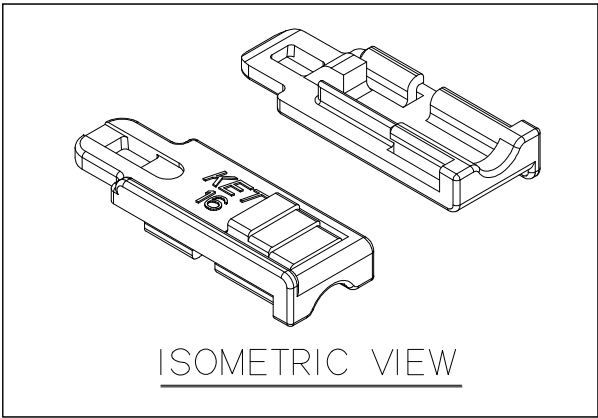

NOTE

- MUST BE FREE OF FLASH, BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- APPLICABLE HOUSING : MG614933R-01
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 FLASH, BURR, WELDLINE 없을 것
- 지시하지 않은 모든 R은 0.3R.
- 적용 HOUSING : MG614933R-01
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

PART NO. *표시는 색상 표기임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL PPS(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
					WIRE RANGE				
					INSULATION				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG634934R-01
DR.	LYS '17.11.01		CHK.	PSH '17.11.01		PART NAME			
CHK.	KSH '17.11.01		APP.	BUC '17.11.01		250 FLAG 1P REAR HOLDER (내열용)			