


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	


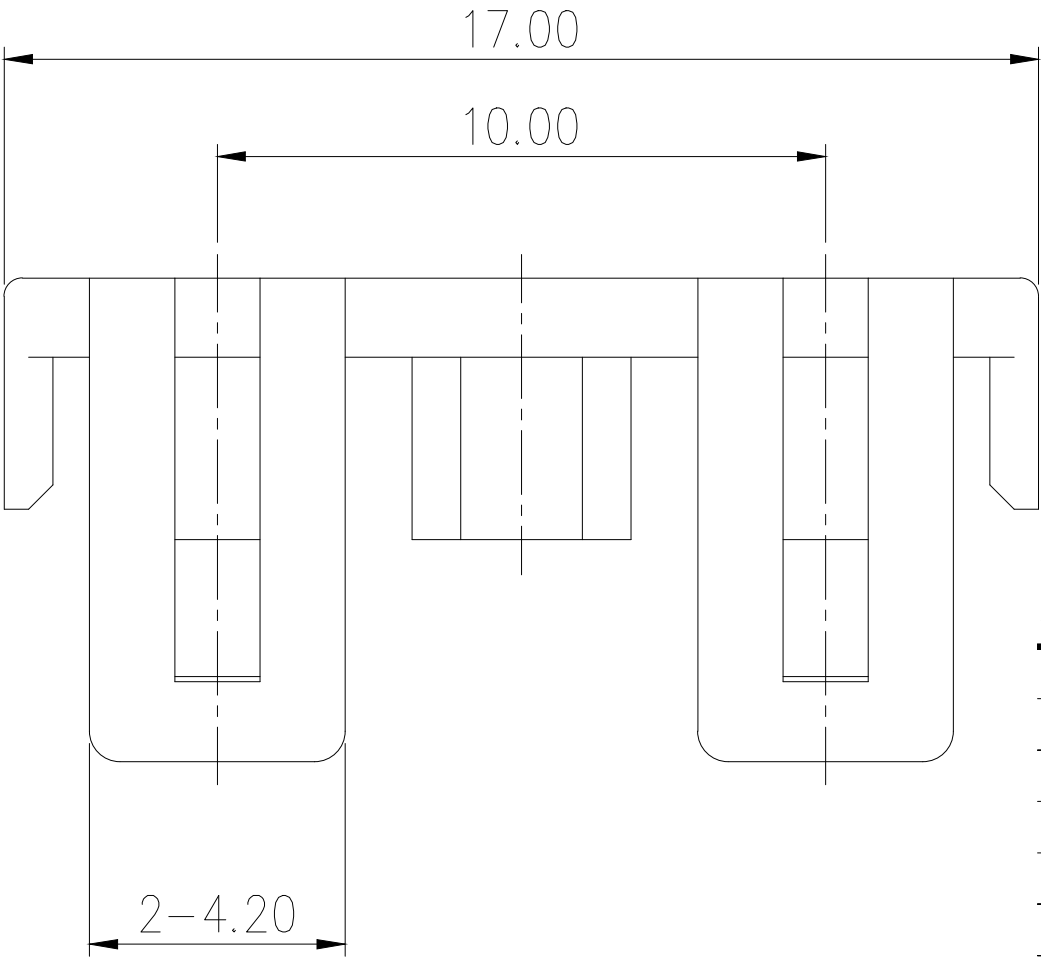


※

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

주 기

- 1. 지시하지 않은 반경 R은 0.2 - 0.3로 한다.
- 2. 기능상 유해한 FLASH, 수축 및 WELDLINE 등이 없을 것.
- 3. 적용 HOUSING : MG615168
- 4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

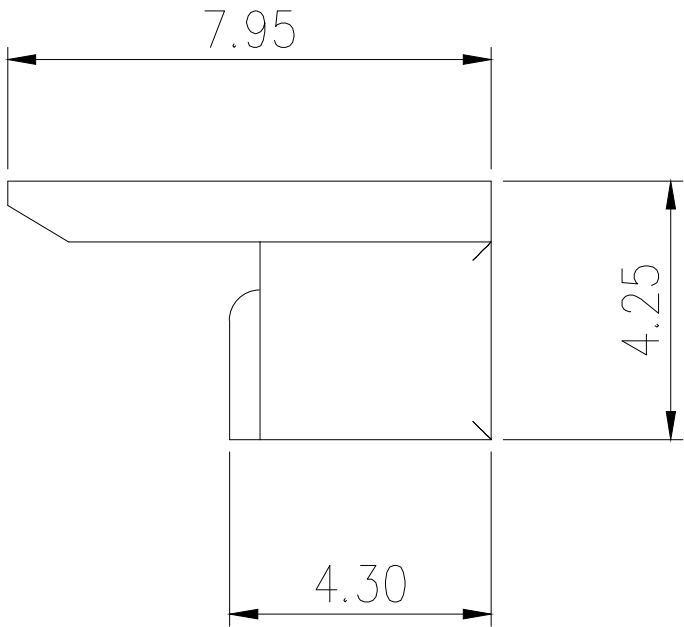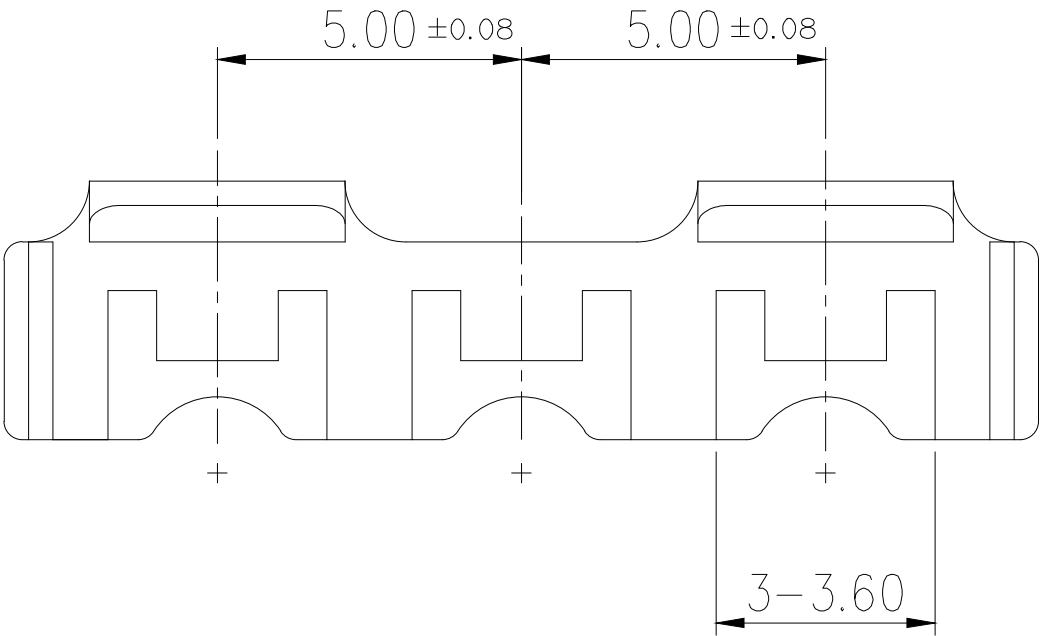

NOTE


- 1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2 - 0.3 RADIUS.
- 2. MUST BE FREE OF FLASH, SINK ,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 3. APPLICABLE HOUSING : MG615168
- 4. HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	PA66(V0)	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	RED		
					WIRE RANGE			
					INSULATION			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
						SEE TABLE	5/1	MG635169-1
DR.	KSH. '10.05.12	CHK.				PART NAME		
CHK.	 5/12	APP.	 5/12			5.0mm(PITCH) 3P REAR HOLDER		