PART NO. MG635169-1

CUSTOMER DRAWING

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

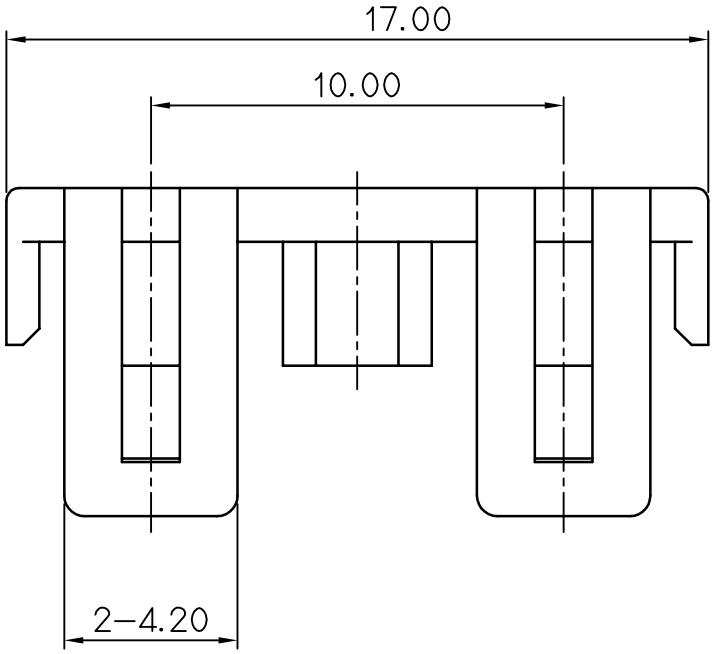

주 기

1.지시하지 않은 반경 R은 0.2 – 0.3로 한다.
2.기능상 유해한 FLASH, 수축 및 WELDLINE등이 없을것.
3.적용 HOUSING : MG615168
4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

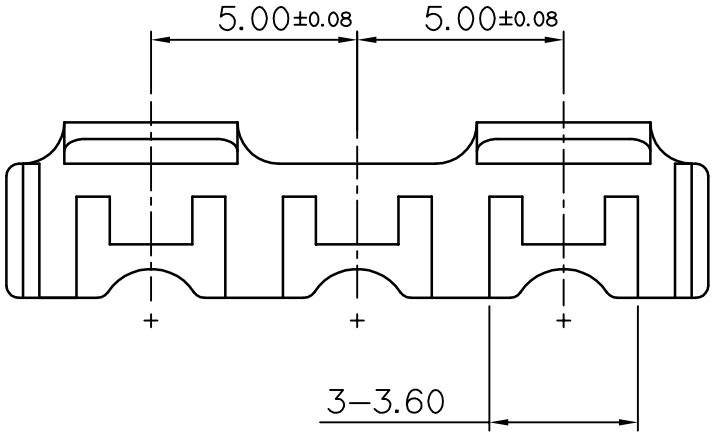

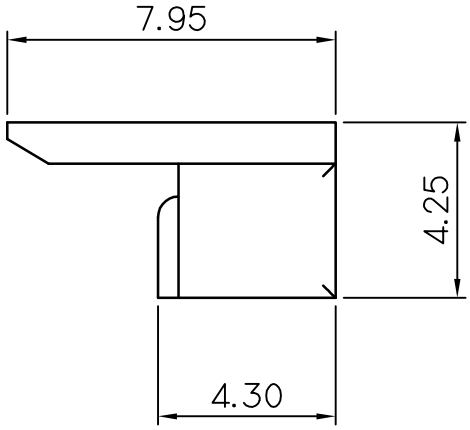

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2 – 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK ,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG615168
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

ISSUE MARK

LTR	REVISION RECORD	DR. / CHK.	APP.	DATE

DR. KSH. '10.05.12 CHK. 5/12

CHK. APP. 5/12

MATERIAL	PA66(V0)	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	RED		
WIRE RANGE		CLASS	
INSULATION		TYPE	
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO. MG635169-1
PART NAME	5.0mm(PITCH) 3P REAR HOLDER		

(DIMENSIONS IN MM)