

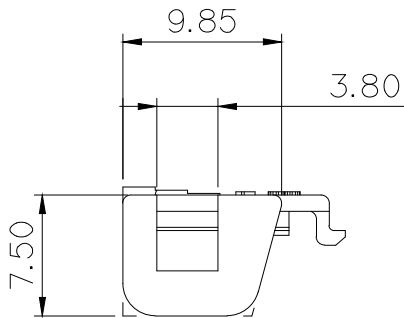


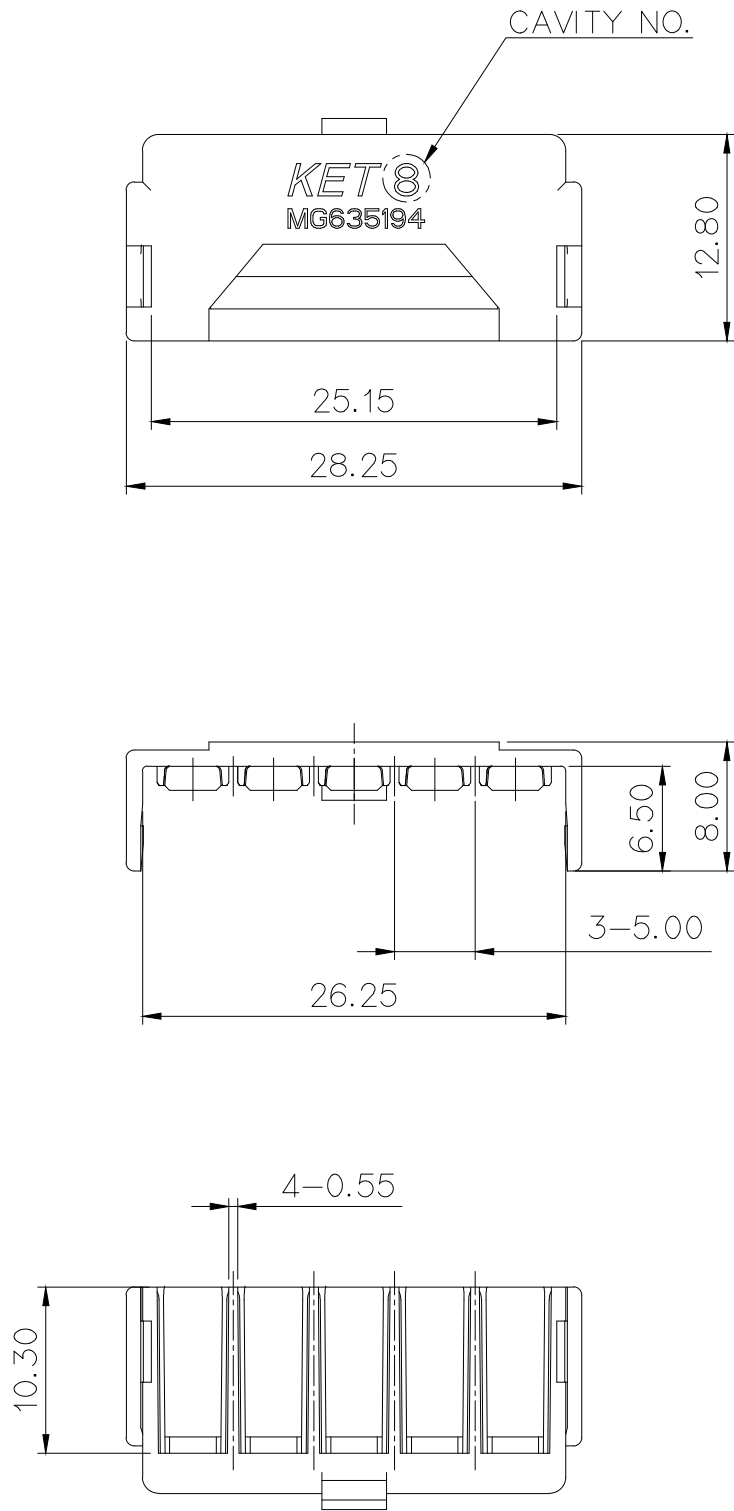

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

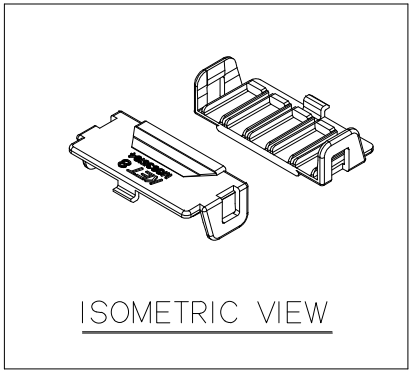

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG615193
- 3.10 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 하우징 : MG615193
- 3.제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

	1	2	3
NO.	COLOR		
0	NATURAL		
1	RED		
2	BLUE		
3	YELLOW		
5	BLACK		
6	GREEN		

						MATERIAL $\triangle 1 \triangle 2$ PET+PC(GWIT)	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH SEE TABLE		
$\triangle 3$	ECO-2002-381 큰거 도면 재작성	YHJ	KSH	KHG	'20.02.29	WIRE RANGE	CLASS	
$\triangle 2$	ECO-1409-113 큰거 도면 재작성	LCM	KSH	BUC	'14.09.19	INSULATION	TYPE	
$\triangle 1$	설계사양변경 S100333큰거 도면 재작성	PJM	KSH	BUC	'10.12.31	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG635194
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME	250 FLAG 5P REAR HOLDER	
	DR. PJM '10. 08. 11		CHK. KSH 08/11					
	CHK.		APP. BUC 08/11					



ISSUE MARK