
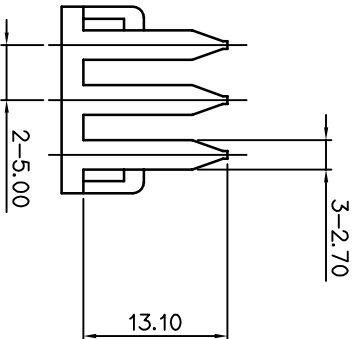





DIMENSIONS IN MM

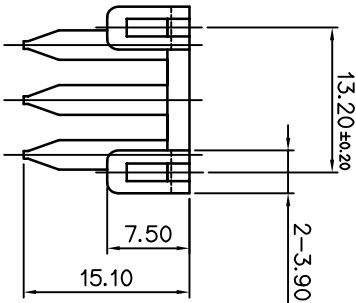

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740050
- APPLICABLE HOUSING : MG625225
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



KET MARK & CAVITY MARK



주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL: ST740050
- 적용 HOUSING : MG625225
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.

ISSUE MARK

						MATERIAL	PA66(V0)	KEIT KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	RED		
						WIRE RANGE			
						INSULATION			
LTR	REVISION RECORD			DR	CHK	APP	DATE	SCALE	PART NO.
DR	<i>10/20/21</i>							2/1	MG635226
CHK	APP			<i>10/20/21</i>				PART NAME	
250 3M R/HOLDER									