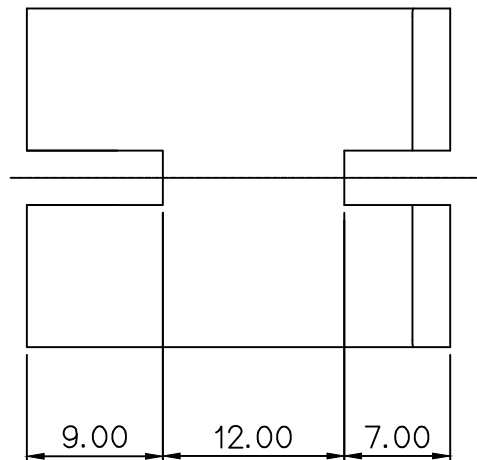
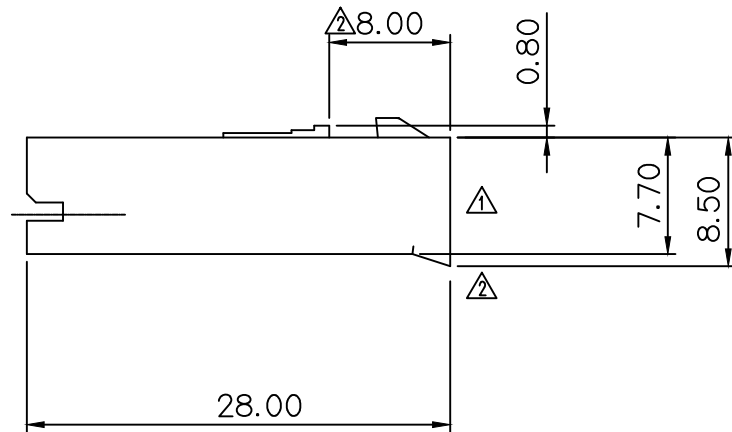
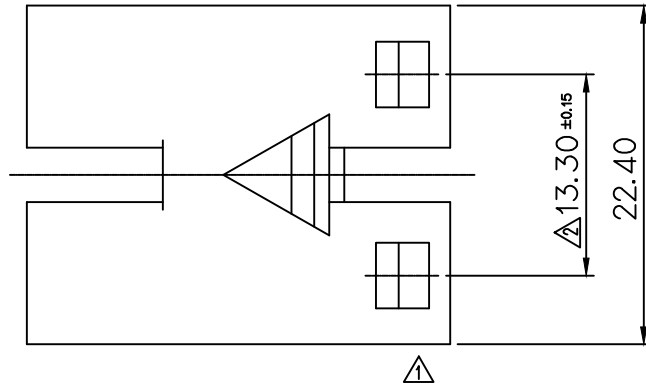
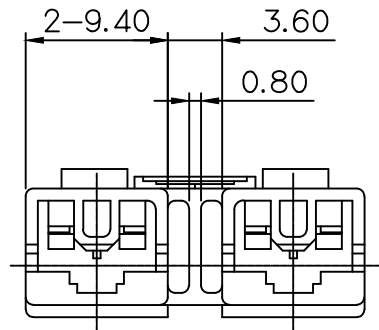
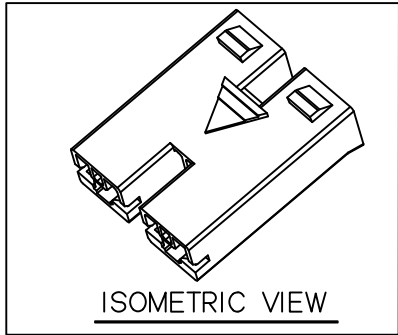


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.10	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL :ST730570-3,571-3
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- APPLICABLE R/HOLDER : MG635145

NO	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 단자 :ST730570-3,571-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 적용 R/HOLDER :MG635145



					MATERIAL PA66(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH <u>3</u> SEE TABLE			
<u>3</u>	ECO-1806-120거거 도면수정	LYS	KSH	BUC	'18.06.11	WIRE RANGE		CLASS 250
<u>2</u>	ECO-1403-174거거 도면수정	SMG	LCM	WJH	'14.03.25	INSULATION		TYPE P-LOCK
<u>1</u>	ECO-1207-142거거 도면수정	KSJ	KSH	WJH	'12.07.18	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NO. MG635262	
DR. KSH. 2010.05.03		CHK.				PART NAME		
CHK.	WJH 05/03	APP. WJH		05/03		250 P-LOCK 2P HOUSING(VAIVE)		