


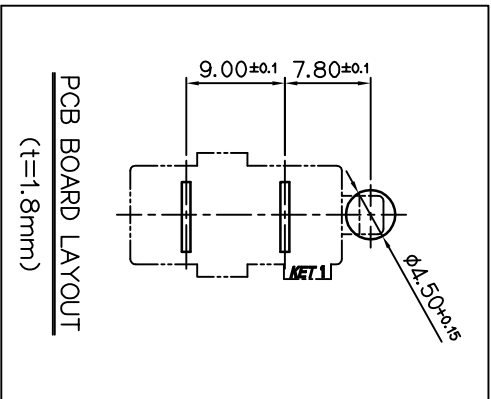
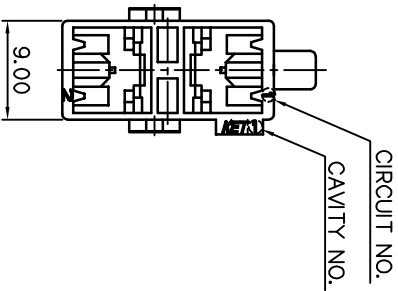


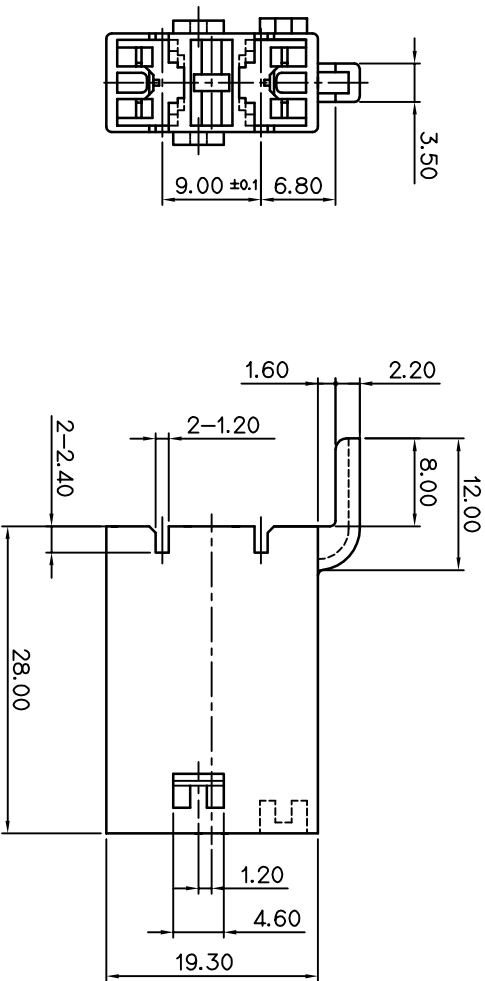

ISOMETRIC VIEW

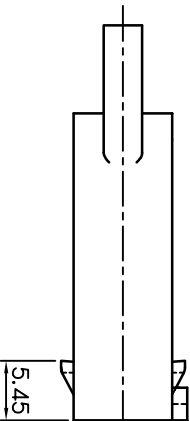

GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30°	0.1

NOTE

- MUST BE FREE OF BURR, WELDLINE
- AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730570-3,571-3,572-3
- HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없음것.
- 적용 단자 : ST730570-3,571-3,572-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

DR. P.J.M '10.11.15		CHK. KSH 11/16		APP. 11/16		PART NAME	
REVISION RECORD		DR. CHK. APP.		DATE		PART NAME	
P.J.M '10.11.15		KSH 11/16		11/16		.250 P-LOCK 2P HS'G (P=9.0mm) GUIDE	
MATERIAL		PBT (V0)		FINISH		NATURAL	
WIRE RANGE		INSULATION		CLASS		.250	
TYPE		P-LOCK		PART NO.		MG635387	
SCALE		2/1		PART NAME		.250 P-LOCK 2P HS'G (P=9.0mm) GUIDE	
DR. P.J.M '10.11.15		CHK. KSH 11/16		APP. 11/16		PART NAME	
REVISION RECORD		DR. CHK. APP.		DATE		PART NAME	
P.J.M '10.11.15		KSH 11/16		11/16		.250 P-LOCK 2P HS'G (P=9.0mm) GUIDE	

ISSUE MARK

KEI KOREA ELECTRIC
TERMINAL CO., LTD.