



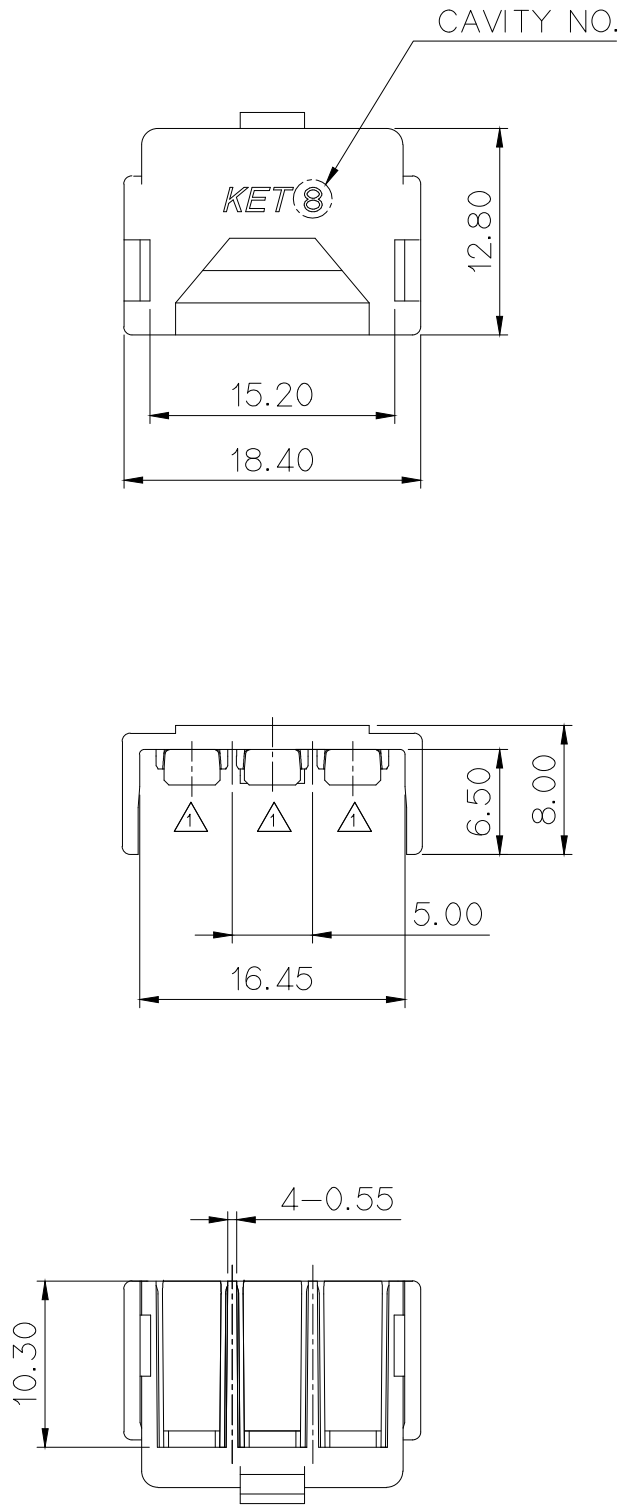

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

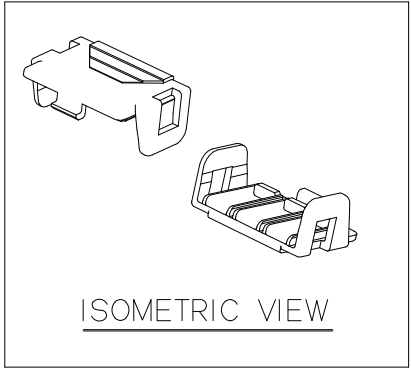

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG615390
- △ APPLICABLE TERMINAL : ST731325-N
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 하우징 : MG615390
- △ 적용 터미널 :ST731325-N
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

△2	NO.	COLOR
	0	NATURAL
	1	RED
*	2	BLUE
	5	BLACK

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL △ PET+PC(GWIT)	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH SEE TABLE		
△2	ECO-1409-113 큰거 도면 재작성	LCM	KSH	BUC	'14.09.19	WIRE RANGE	CLASS
△1	ECO-1203-361큰거 도면 재작성	PJM	7/16	7/16	'12.03.22	INSULATION	TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1
DR.	LCM '10.12.28	CHK.	7/16	12/28		PART NAME	PART NO. MG635391
CHK.		APP.	7/16	12/28		250 FLAG 3P REAR HOLDER	