

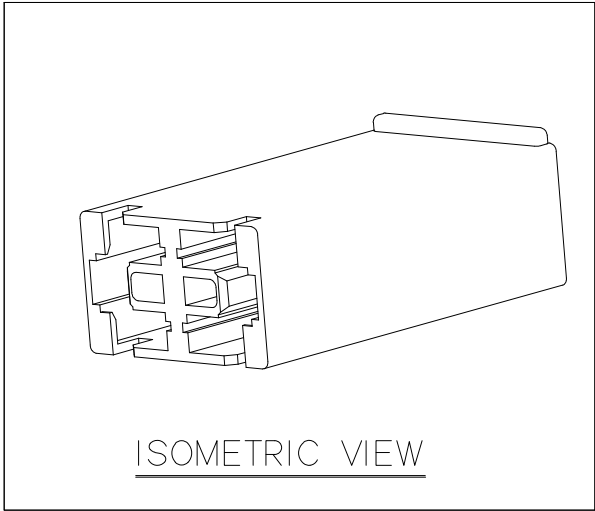
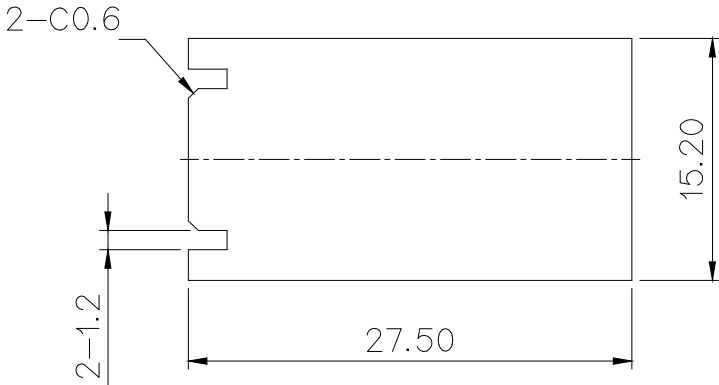


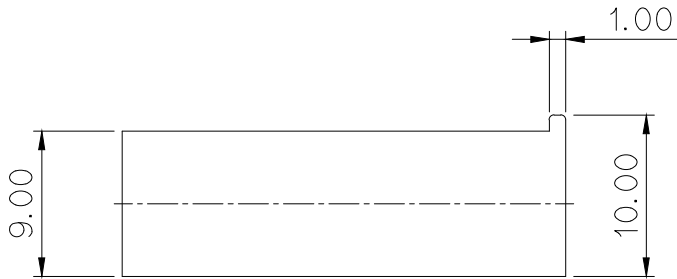


ISOMETRIC VIEW

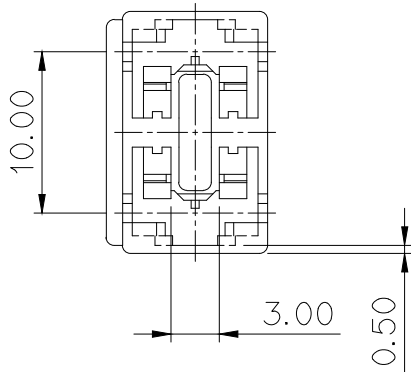

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL: ST730570, 571, 572, 1016
- 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

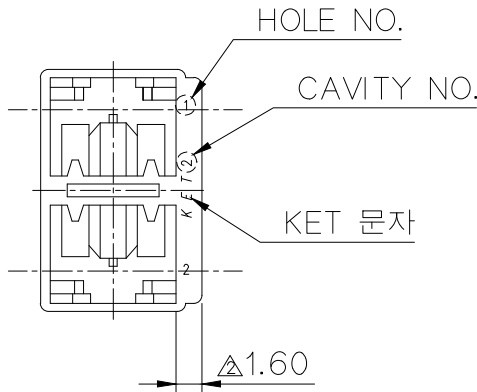

NOTE

- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE TERMINAL :ST730570, 571, 572, 1016
- 3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

						MATERIAL △PET+PC(GWIT)			KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH NATLURAL			
						WIRE RANGE		CLASS .250	
						INSULATION		TYPE P-LOCK	
	ECO-1611-330 큰거 도면 재작성	SMG	KSH	BUC	'16.11.21				
	ECO-1409-113 큰거 도면 재작성	LCM	KSH	BUC	'14.09.19				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG 635465
DR. LCM 2011.02.22		CHK. KSH 2011.02.22							
CHK.		APP.  2011.02.22		.250 P-LOCK 2P HS'G (P=1.0mm)					