
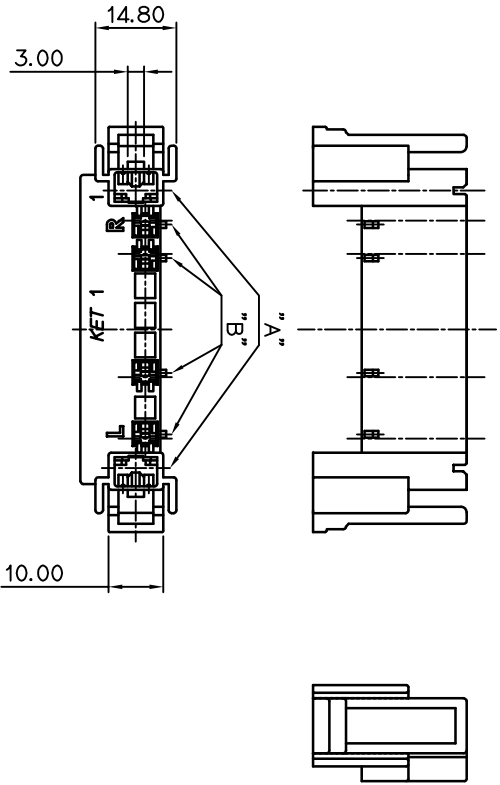
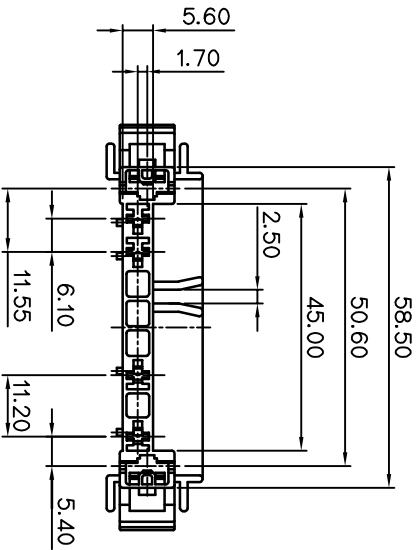
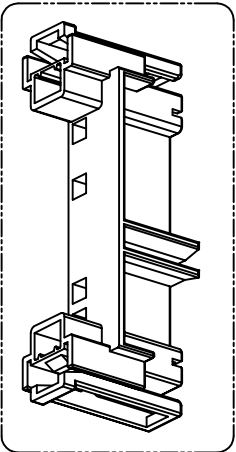


DIMENSIONS IN MM

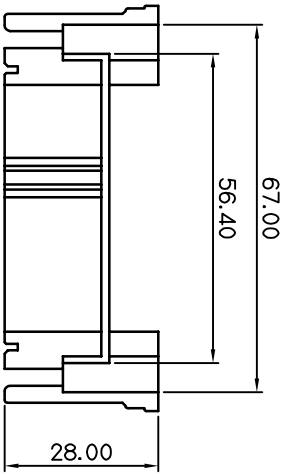

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBS,PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELY DIRECTIVE & ROHS REGULATION.
3. APPLICABLE R/HOLDER : MATING HOLE "A", "B"
 - * A(250 P-LOCK) - MG635572-2
 - * B(125 SERIES) - MG635573-2, MG635574-1
4. APPLICABLE TERMINAL : MATING HOLE "A", "B"
 - * A(250 P-LOCK) - ST730570, ST730571, ST730572
 - * B(125 SERIES) - ST731342

주 기

1. 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
2. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBS,PBDES)은 EU ELY 지침 및 ROHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
3. 적용 R/HOLDER : 적용 홀 "A", "B"
 - * A(250 P-LOCK) : MG635572-2
 - * B(125 SERIES) : MG635573-2, MG635574-1
4. 적용 TERMINAL : 적용 홀 "A", "B"
 - * A(250 P-LOCK) : ST730570, ST730571, ST730572
 - * B(125 SERIES) : ST731342

				MATERIAL	PBT (GWIT)	ISSUE MARK	
				FINISH	NATURAL	KJET ENGINEERED	
				WIRE RANGE		CLASS	
				INSULATION		TYPE	
LTR	REVISION RECORD	DR	CHK	APP	DATE	SCALE	PART NO.
DR	CHK	CHK	CHK	APP		1/1	MG635571
CHK	APP	PART NAME				MOTOR MULTI 6P HOUSING	