



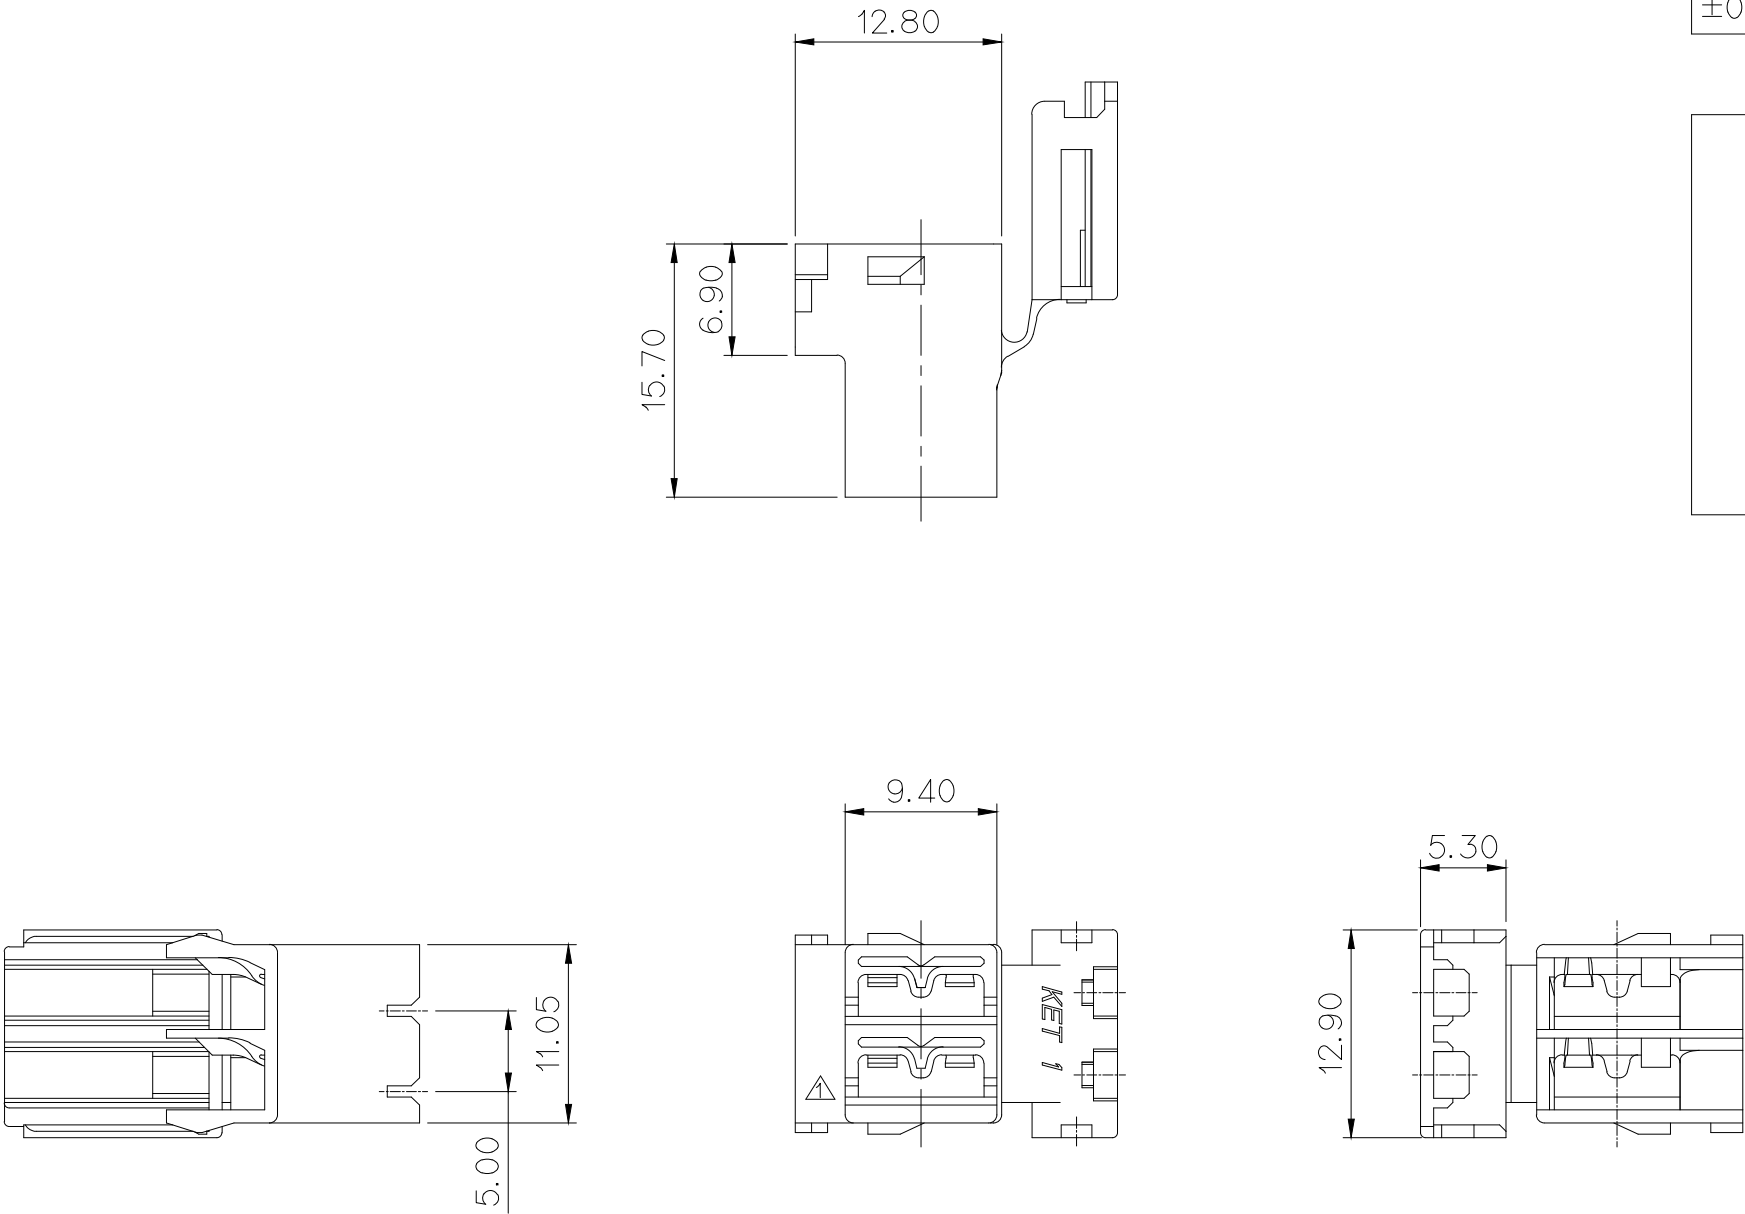

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

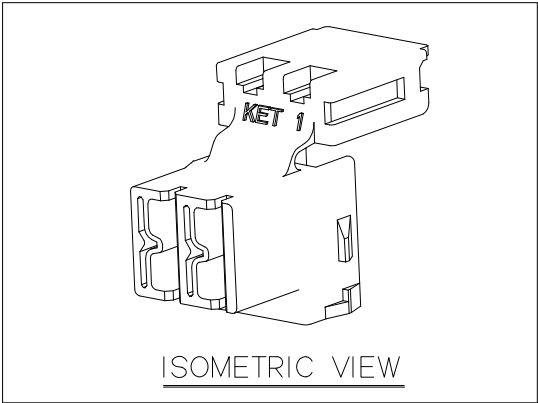

ISOMETRIC VIEW

PART NO. *표시는 색상 표기임.

NO.	COLOR
* 0	NATURAL
* 1	RED
* 2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

NOTE

- MUST BE FREE OF FLASH, BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- APPLICABLE TERMINAL : ST731325-N
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 FLASH, BURR, WELDLINE 없을 것
- 지시하지 않은 모든 R은 0.3R.
- 적용 TERMINAL : ST731325-N
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL		PET+PC(GWIT)			KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE				
						WIRE RANGE		CLASS				250
						INSULATION		MATERIAL SIZE				
△	ECO-11801-277근거 도면 재작성	LYS	KSH	BUC	'18.01.17							
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	PART NO.		
DR. LYS '17.11.01		CHK. PSH '17.11.01						2/1	MG635689T-*02			
CHK. KSH '17.11.01		APP. BUC '17.11.01				PART NAME						
						250 FLAG 2P HSG						

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK