

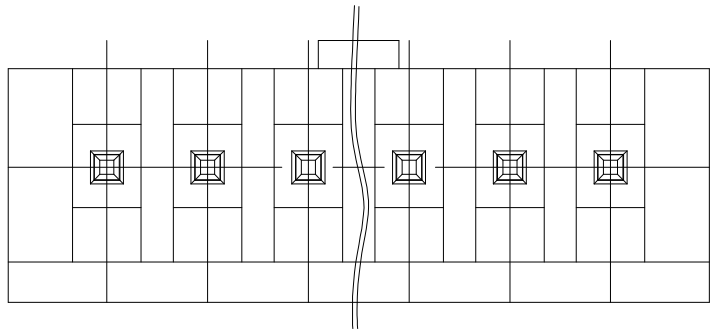
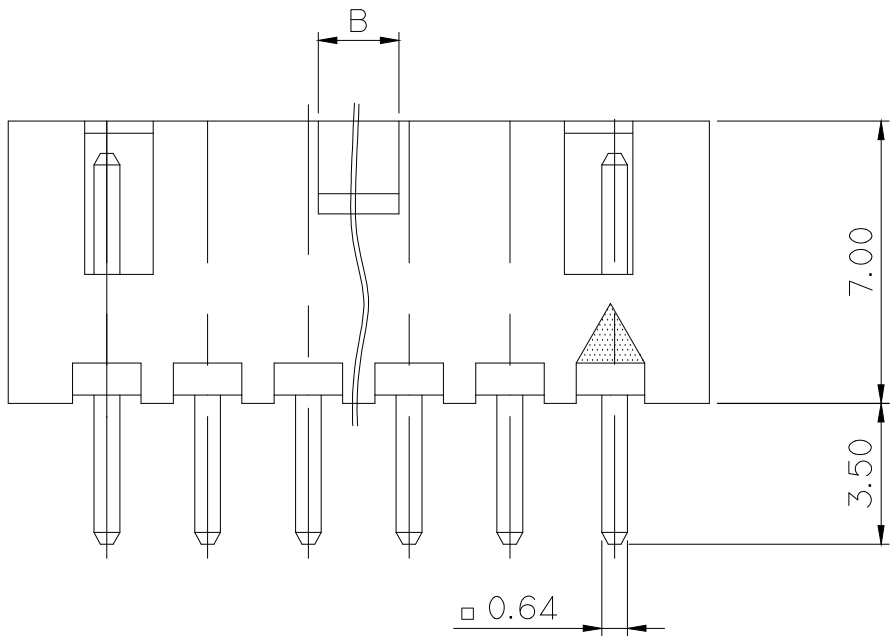


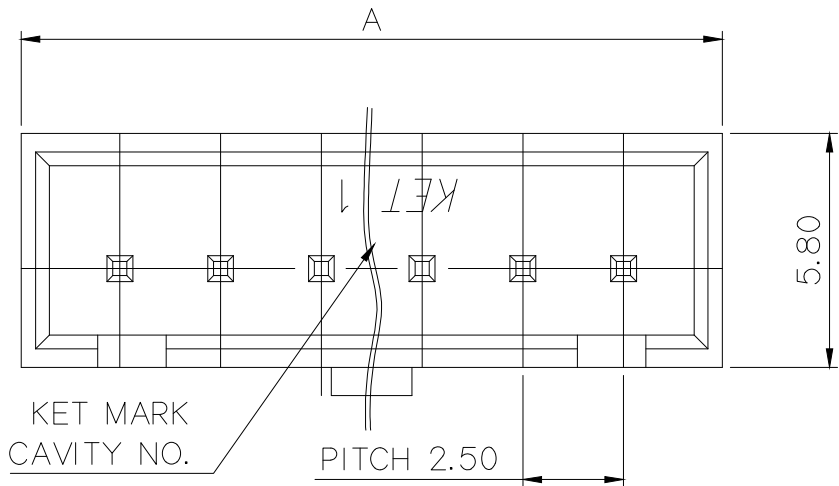

주 기

- 1.기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 3. MATING HOUSING : MG615632-0NN

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

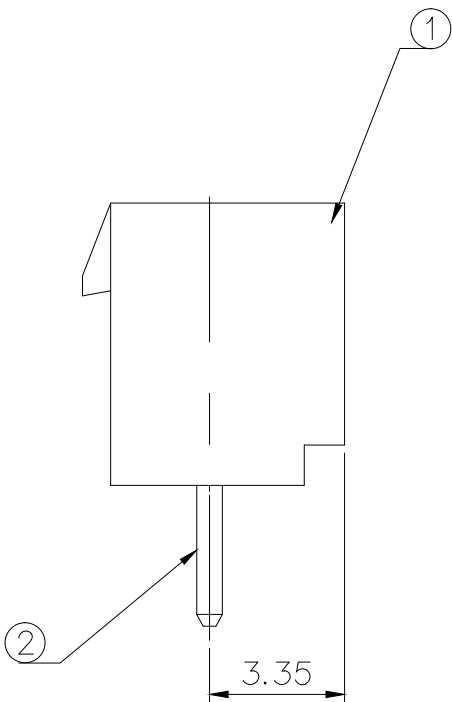

PIN	PART NO.	A	B
2	646077-002	7.4	1.6
3	646077-003	9.9	1.6
4	646077-004	12.4	3.0
5	646077-005	14.9	3.0
6	646077-006	17.4	4.3
7	646077-007	19.9	6.8
8	646077-008	22.4	9.3
9	646077-009	24.9	11.8
10	646077-010	27.4	11.8
11	646077-011	29.9	11.8
12	646077-012	32.4	11.8
13	646077-013	34.9	11.8
14	646077-014	37.4	11.8
15	646077-015	39.9	11.8

NO.	PART NAME	MATERIAL
①	2.5 PCB HS'G	PA66+GF10(GWIT)
②	PIN	BRASS

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE			
						INSULATION			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. MG646077-0NN
DR. PSH.		CHK. KSH.				PART NAME			
CHK.		APP. BUC.				2.5 PCB ASS'Y (2P~15P)			