

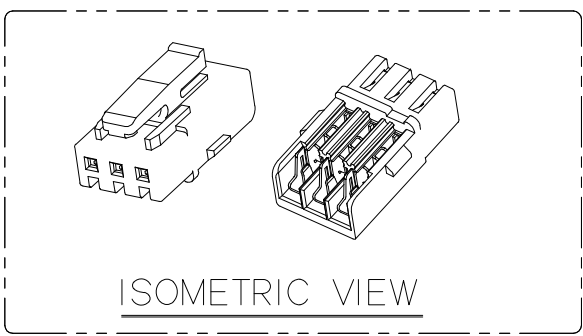
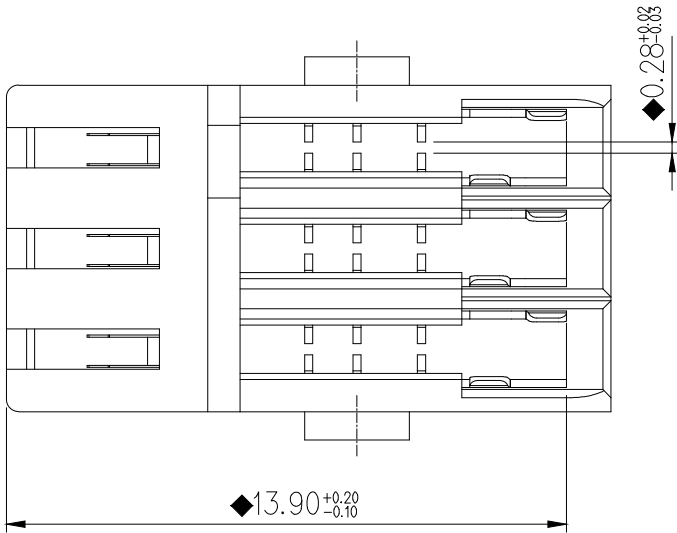
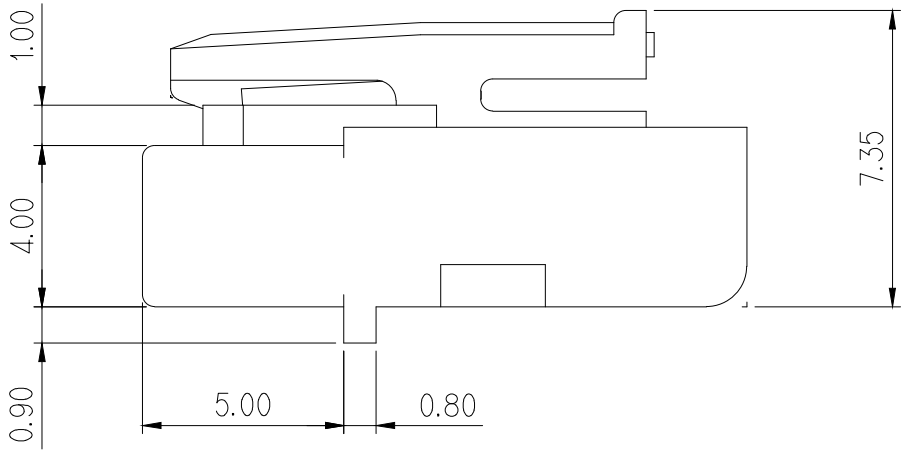


△ PART NO. *표시는 COLOR 명기 임.

NO.	PART NAME	PART NO.	MATERIAL	FINISH	Q'TY
1	2.5 IDC 3F ASS'Y	MG656847-~*03	-	-	1
2	2.5 IDC 3F HS'G	MG676602-~*03	SEE TABLE	SEE TABLE	1
3	0.64 IDC FEMALE TM'L	ST793380-3	COPPER ALLOY	PRE-TIN	3

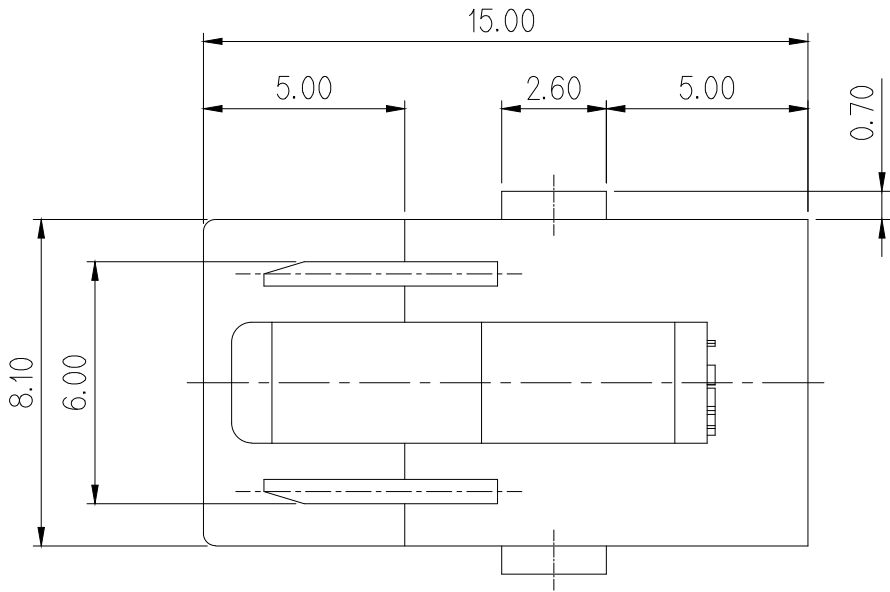

ISOMETRIC VIEW

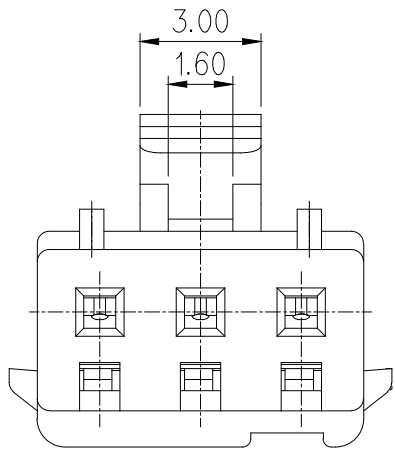


GENERAL TOLERANCE (HOUSING)							USED ON
5MAX	10MAX	20MAX	45MAX	45VR	ANGLE	ECCENT	
±0.15	±0.2	±0.25	±0.3	±0.5	±30'	0.1	

주 기

- 1.지시하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE 없을 것.
- 3.적용 TERMINAL : ST793380-3
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL : ST793380-3
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

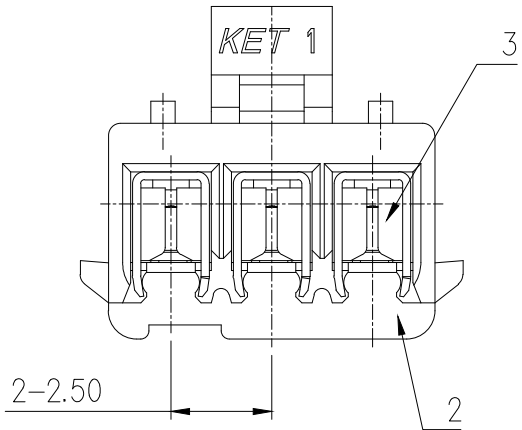

△	NO.	MATERIAL	COLOR
*	0	PET+PC (G.W.I.T)	NATURAL
*	1		RED
*	2		BLUE
*	3		YELLOW
*	5		BLACK

APPROVED

2017-02-08

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE	
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
△	ECO-1611-309 근거 도면 재작성	LCM	KSH	BUC	'16.11.18	TOLERANCE EXCEPT AS NOTED		SCALE 5/1	PART NO. MG656847-*03
△	ECO-1609-203 근거 도면 재작성	LCM	KSH	BUC	'16.09.21	SEE TABLE		5/1	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE.	PART NAME		
DR.	LCM. '15. 12. 29		CHK. PSH. '15. 12. 29		2.5 IDC 3F ASS'Y				
CHK.	KSH. '15. 12. 29		APP. BUC. '15. 12. 29						