PART NO. MG656847-*06

CUSTOMER DRAWING

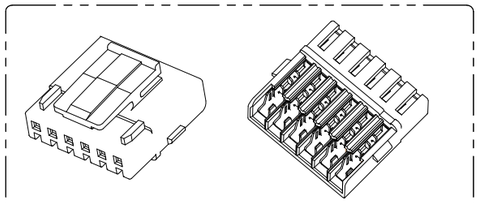

ISOMETRIC VIEW

GENERAL TOLERANCE (HOUSING)							USED ON
5MAX	10MAX	20MAX	45MAX	45VR	ANGLE	ECCENT	
±0.15	±0.2	±0.25	±0.3	±0.5	±30'	0.1	

주 기

1.지시하지 않은 반경 R은 0.2-0.3로 한다.
2.기능상 유해한 BURR 및 WELDLINE 없을 것.
4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

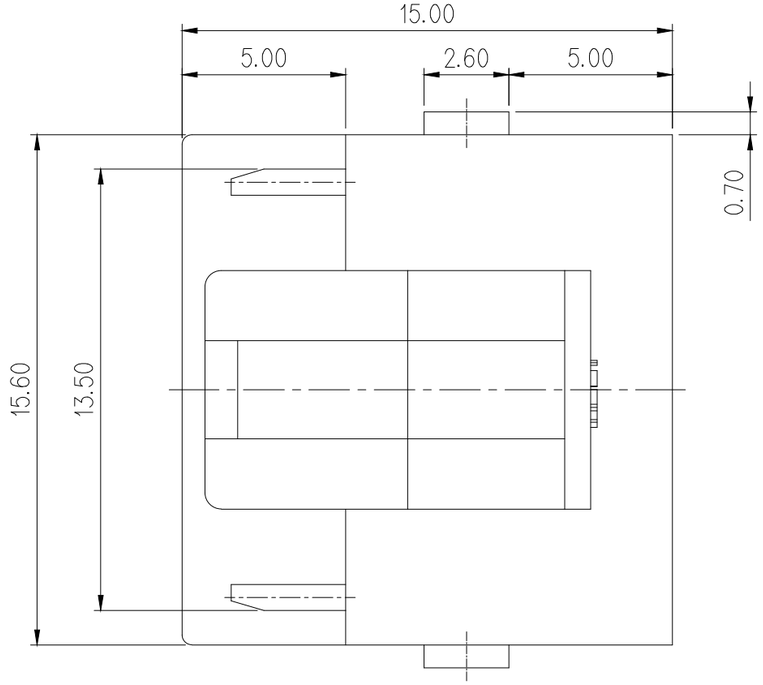

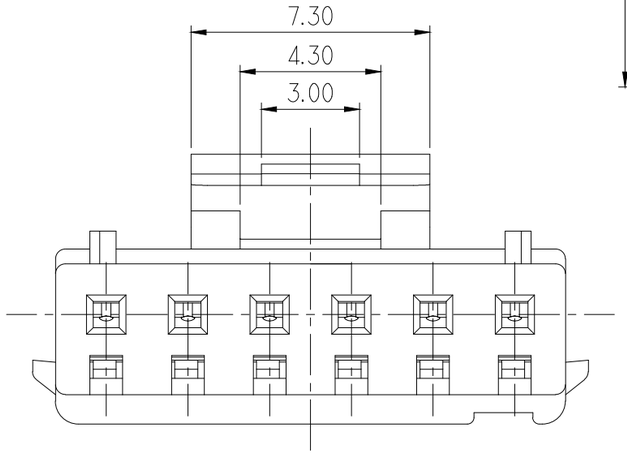

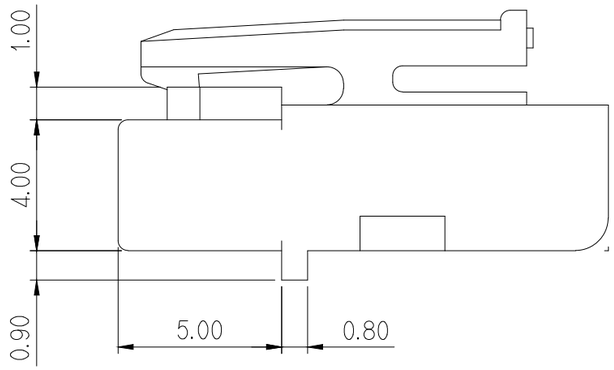

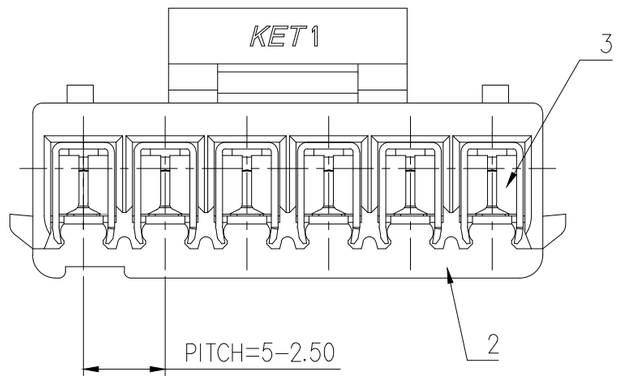

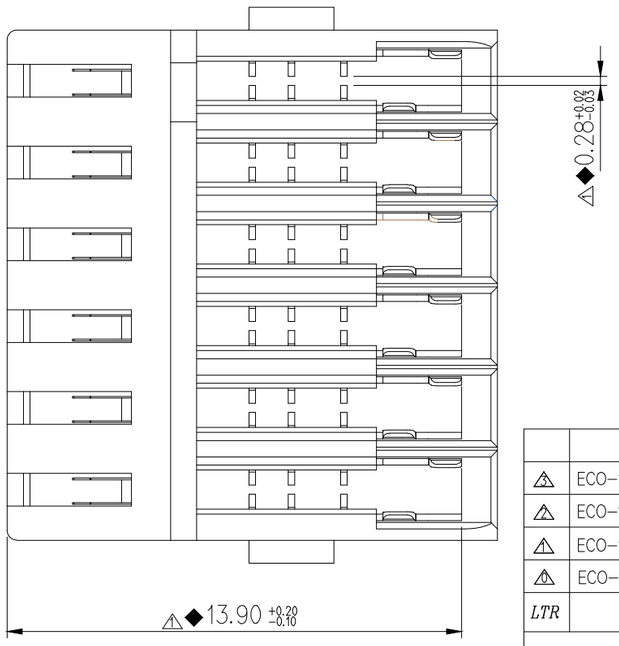

⚠2 PART NO. *표시는 COLOR 명기 임.

NO.	PART NAME	PART NO.	MATERIAL	FINISH	Q'TY
1	2.5 IDC 6F ASS'Y	MG656847-*06	-	-	1
2	2.5 IDC 6F HS'G	MG676602-*06	SEE TABLE	SEE TABLE	1
3	0.64 IDC FEMALE TM'L	ST793380-3	COPPER ALLOY	PRE-TIN	6

⚠2 ⚠3

	NO.	MATERIAL	COLOR
*	0	PET+PC (G.W.I.T)	NATURAL
*	1		RED
*	2		BLUE
*	3		YELLOW
*	5		BLACK

APPROVED
2017-02-08
KOREA ELECTRIC TERMINAL CO., LTD. Electronic Produc t Development Team

ISSUE MARK

LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
⚠3	ECO-1611-309 근거 도면 재작성	LCM	KSH	BUC	'16.11.18
⚠2	ECO-1609-208 근거 도면 재작성	LCM	KSH	BUC	'16.10.07
⚠1	ECO-1608-156 근거 도면 재작성	LCM	KSH	BUC	'16.08.17
⚠0	ECO-1605-270 근거 도면 재작성	LCM	KSH	BUC	'16.05.17

DR. LCM. '15. 12. 29 CHK. PSH. '15. 12. 29
CHK. KSH. '15. 12. 29 APP. BUC. '15. 12. 29

MATERIAL SEE TABLE
FINISH SEE TABLE
WIRE RANGE
INSULATION
CLASS
TYPE
TOLERANCE EXCEPT AS NOTED SEE TABLE
SCALE 5/1
PART NO. MG656847-*06
PART NAME 2.5 IDC 6F ASS'Y

KET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.

(DIMENSIONS IN MM)