
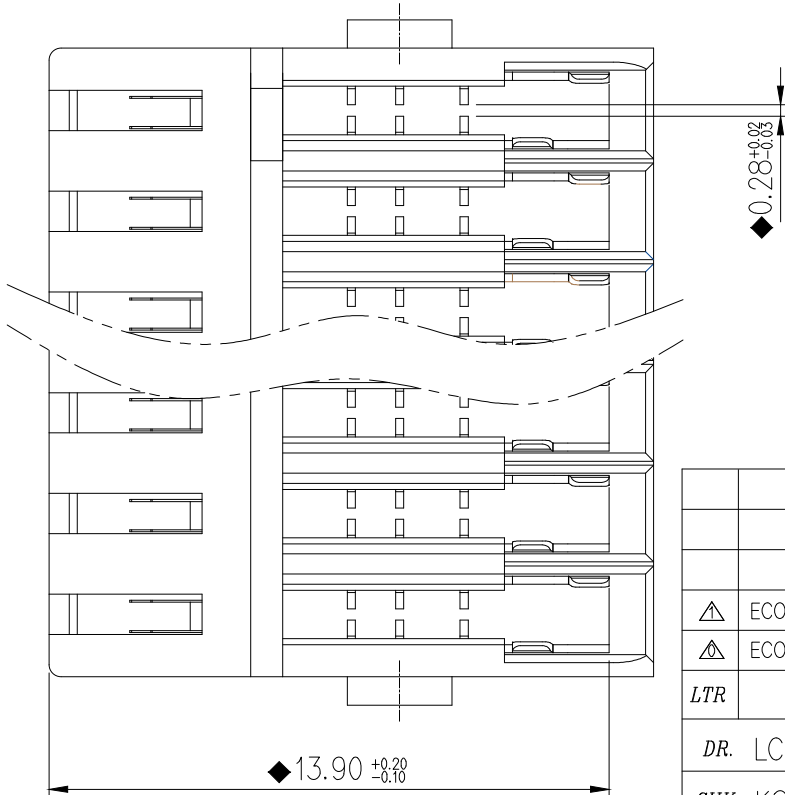
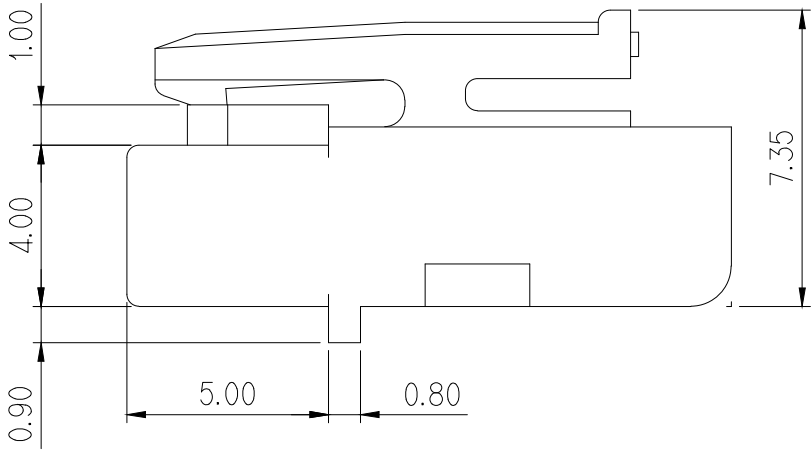
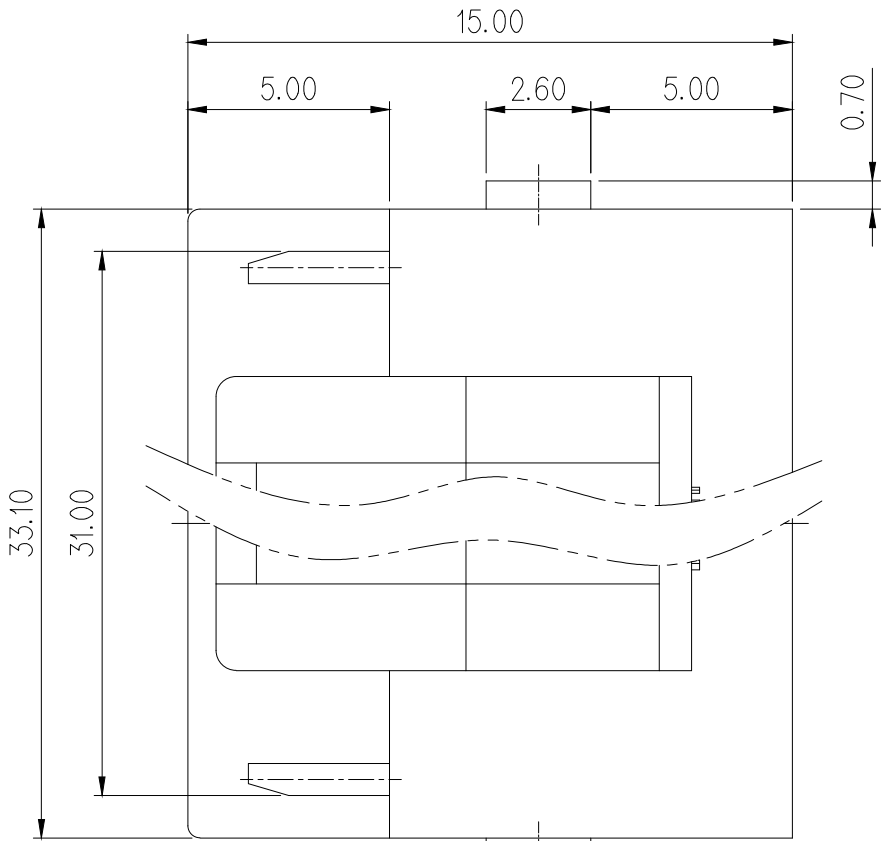
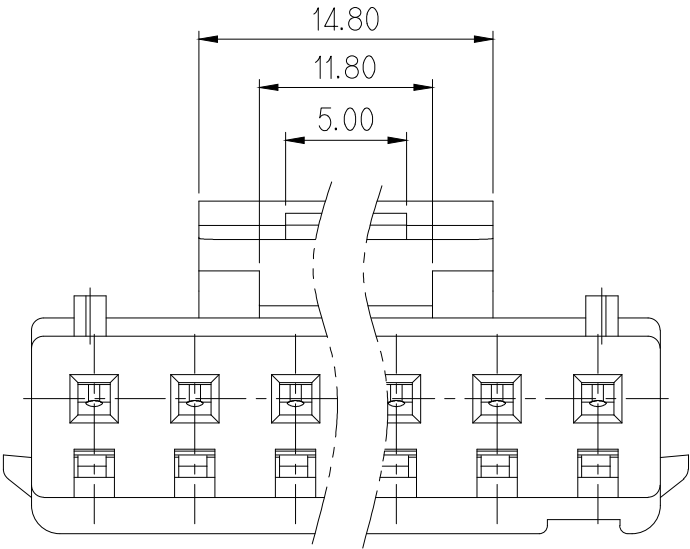


△ PART NO. ※표시는 COLOR 명기 임.

NO.	PART NAME	PART NO.	MATERIAL	FINISH	Q'TY
1	2.5 IDC 13F ASS'Y	MG656847-※13	-	-	1
2	2.5 IDC 13F HS'G	MG676602-※13	SEE TABLE	SEE TABLE	1
3	0.64 IDC FEMALE TM'L	ST793380-3	COPPER ALLOY	PRE-TIN	13

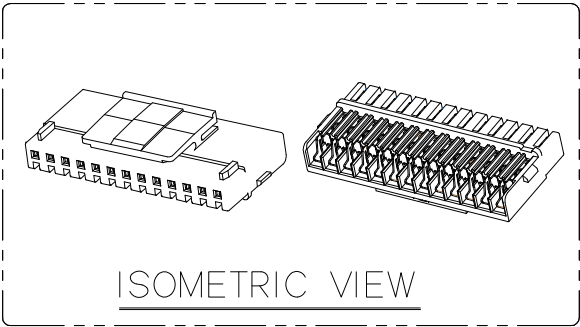

GENERAL TOLERANCE (HOUSING)							USED ON
5MAX	10MAX	20MAX	45MAX	45VR	ANGLE	ECCENT	
±0.15	±0.2	±0.25	±0.3	±0.5	±30'	0.1	


주 기

- 1.지시하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE 없을 것.
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 4.◆: 중요관리치수

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- 4.◆: Important Management Point

△	NO.	MATERIAL	COLOR
*	0	PET+PC (G.W.I.T)	NATURAL
*	1		RED
*	2		BLUE
*	3		YELLOW
*	5		BLACK

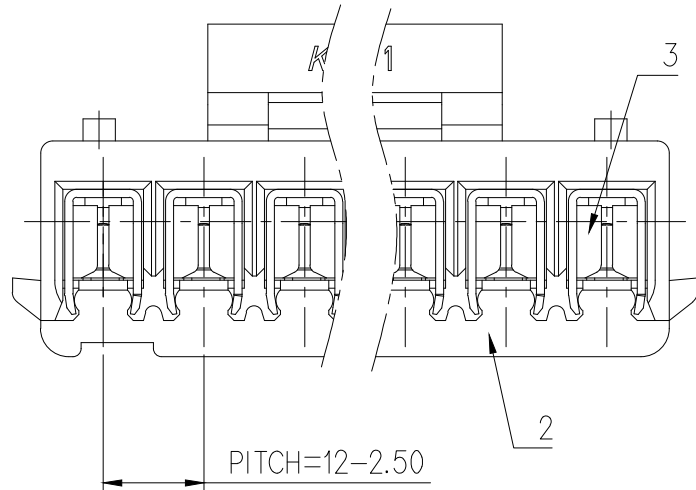

APPROVED

2017-02-08

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH SEE TABLE		
						WIRE RANGE		CLASS
	ECO-1611-309 근거 도면 재작성	LCM	KSH	BUC	'16.11.18	INSULATION		TYPE
	ECO-1209-203 근거 도면 재작성	LCM	KSH	BUC	'16.09.21			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. MG656847-*13
DR. LCM. '15. 12. 29		CHK.PSH. '15. 12. 29		PART NAME				
CHK. KSH. '15. 12. 29		APP. BUC. '15. 12. 29		2.5 IDC 13F ASS'Y				