



CUSTOMER DRAWING

PART NO.


SEE TABLE

DIMENSIONS IN MM


GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

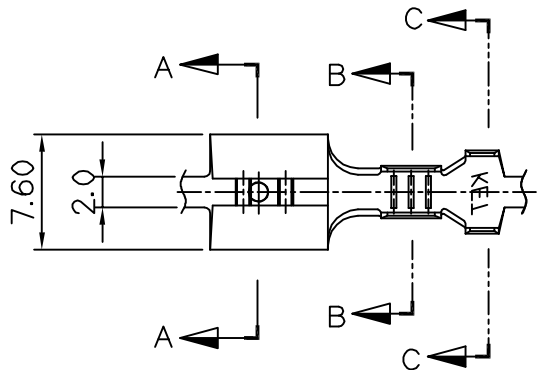

SECTION C-C



SECTION B-B

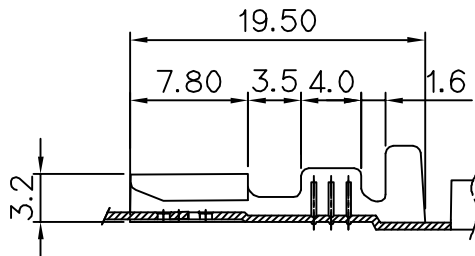


주 기

1. 기능상 유해한 흠, 변형 및 BURR 등이 없을 것
2. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION



SECTION A-A

NO.	PART No.	MATERIAL	FINISH	GAP
1	ST730135-1	BRASS 0.45 t	UNPLATE	-
2	ST730135-2		TIN	-
3	ST730135-4		UNPLATE	0.52~0.63

3

ISSUE MARK

					MATERIAL SEE TABLE		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH SEE TABLE		
3	ECO-1307-243 근거 도면 수정	LCM	KSH		'13.08.06	WIRE RANGE AWG 18-14	CLASS 9316-022
2	설계사양변경(S110128)근거 도면 제작성	KSJ			'11.04.27	INSULATION	TYPE
1	설계사양변경(S040118)근거 도면 수정				'04.09.03	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.	SEETABLE
DR. CHOI 82.12.31		CHK.		PART NAME			
CHK. S. w		APP. Wafu		.250 SLIP-ON (S)			