



CUSTOMER DRAWING


PART NO. ST730136

DIMENSIONS IN MM



GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

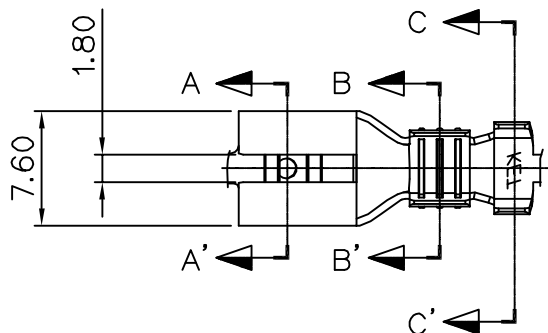

SECTION B-B'



SECTION C-C'

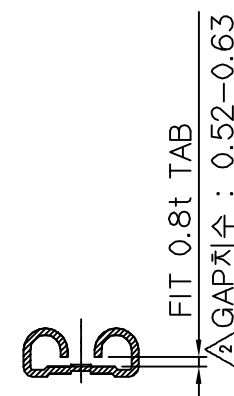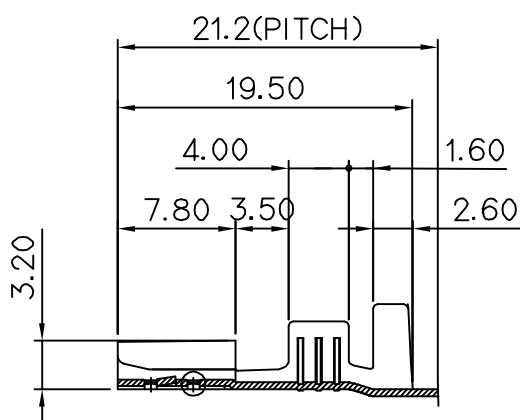

SECTION A-A'

주 기


- 기능상 유해한 흠, 변형 및 BURR 등이 없을 것
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

No.	MATERIAL	FINISH
1	0.45t C2680R-EH	UN PLATE
2		TIN
3		PRE TIN

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

ISSUE MARK

					MATERIAL SEE TABLE			KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE			
③	ECO-1110-169근거 도면 재작성	PJM 		'11.10.27	WIRE RANGE 2.00 - 5.08mm ²		CLASS	9316-032
②	CU' 요청 GAP치수 표기(S040118)			'04.09.03	INSULATION		TYPE	SCR-307E
①	치수 수정 1곳			'90.02.13	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE	PART NO.
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE	PART NO.	
						2/1	ST730136	
DR.	CHOI 83.01.04	CHK.				PART NAME		
CHK.		APP.				250 SLIP-ON REC' (L)		