
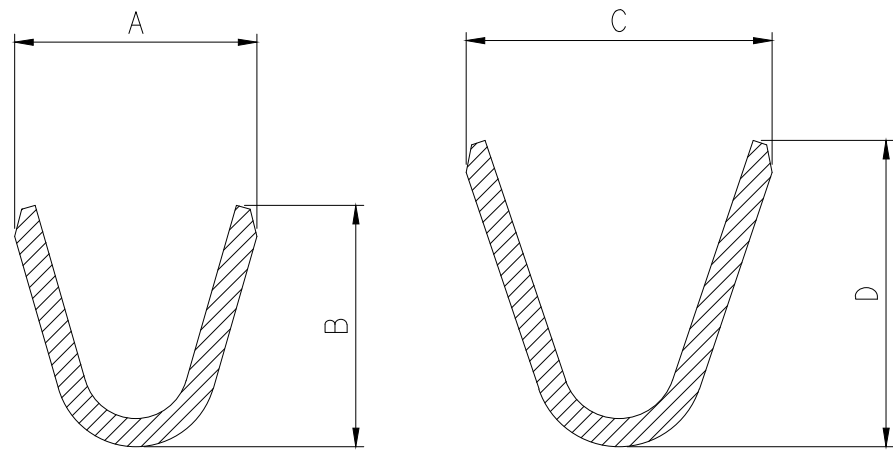
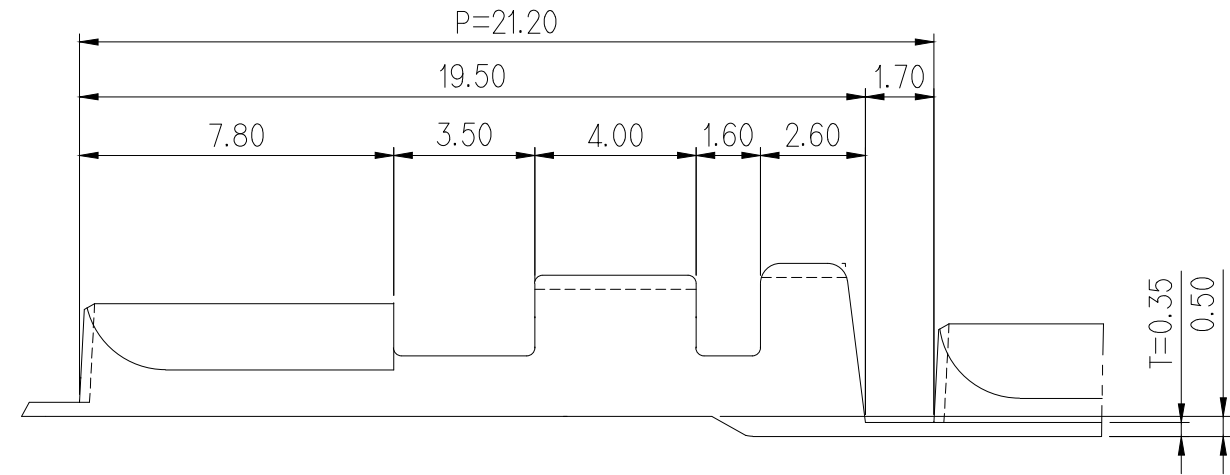
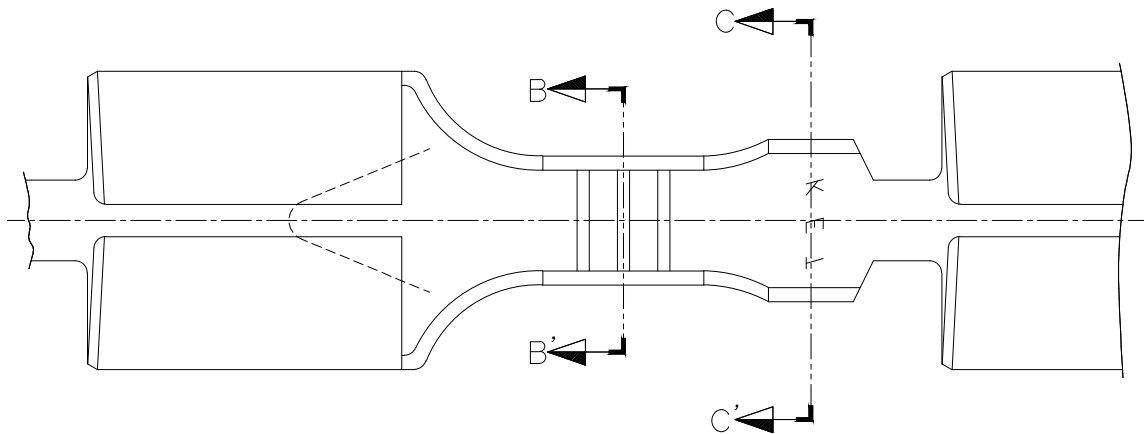
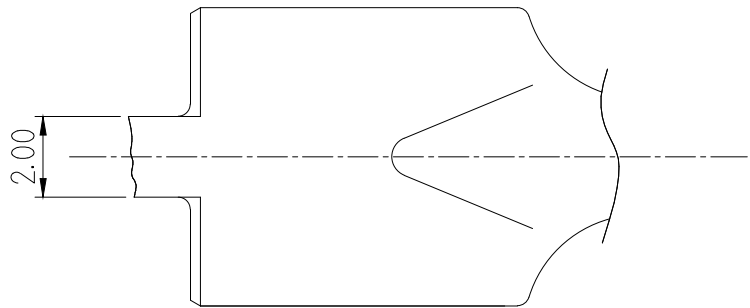


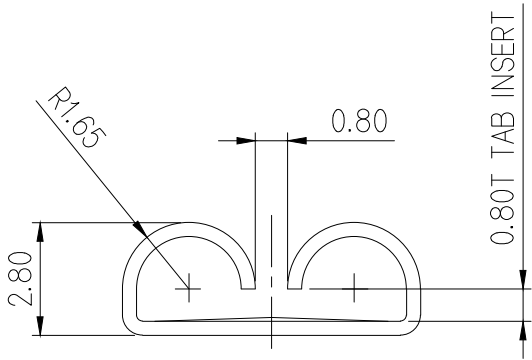

SECTION B-B'
(SCALE 10/1)

SECTION C-C'
(SCALE 10/1)

NO	PART NAME	PART NO	AWG	WIRE SIZE(mm)	A	B	C	D
1	250 SLIP-ON REC TML(T)	ST730267-3T	#24-#22	0.22-0.30	2.40	2.25	3.80	3.70
2	250 SLIP-ON REC TML(S)	ST730267-3S	#22-#20	0.30-0.50	2.90	2.80	3.80	3.80
3	250 SLIP-ON REC TML(M)	ST730268-3M	#18-#16	0.85-1.25	3.60	3.50	5.50	5.00
4	250 SLIP-ON REC TML(L)	ST730269-3L	#14-#12	2.00-3.00	5.20	4.50	6.20	6.00

주 기

- 지시없는 R=0.30으로 한다.
- 기능상 휨,변형 및 BURR가 없을 것.
- 적용 HOUSING: 1P[MG611933,MG615077],3P[MG614758]
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대허용농도를 초과해서는 안된다.

APPROVED

2021-12-23

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL		BRASS	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH		PRE-TIN	
△	ECO-2006-228 근거 도면 재작성	YHJ	PSH	KSH	'20.06.18	WIRE RANGE		CLASS .250
△	ECO-1806-032 근거 도면 재작성	LCM	KSH	BUC	'18.06.05	INSULATION		TYPE
△	ECO-1708-305 근거 도면 재작성	LCM	KSH	BUC	'17.08.21	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. SEE TABLE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE			
DR. LCM '17.04.24		CHK. PSH '17.04.24				PART NAME △250 SLIP-ON REC TML		
CHK. KSH '17.04.24		APP. BUC '17.04.24						