
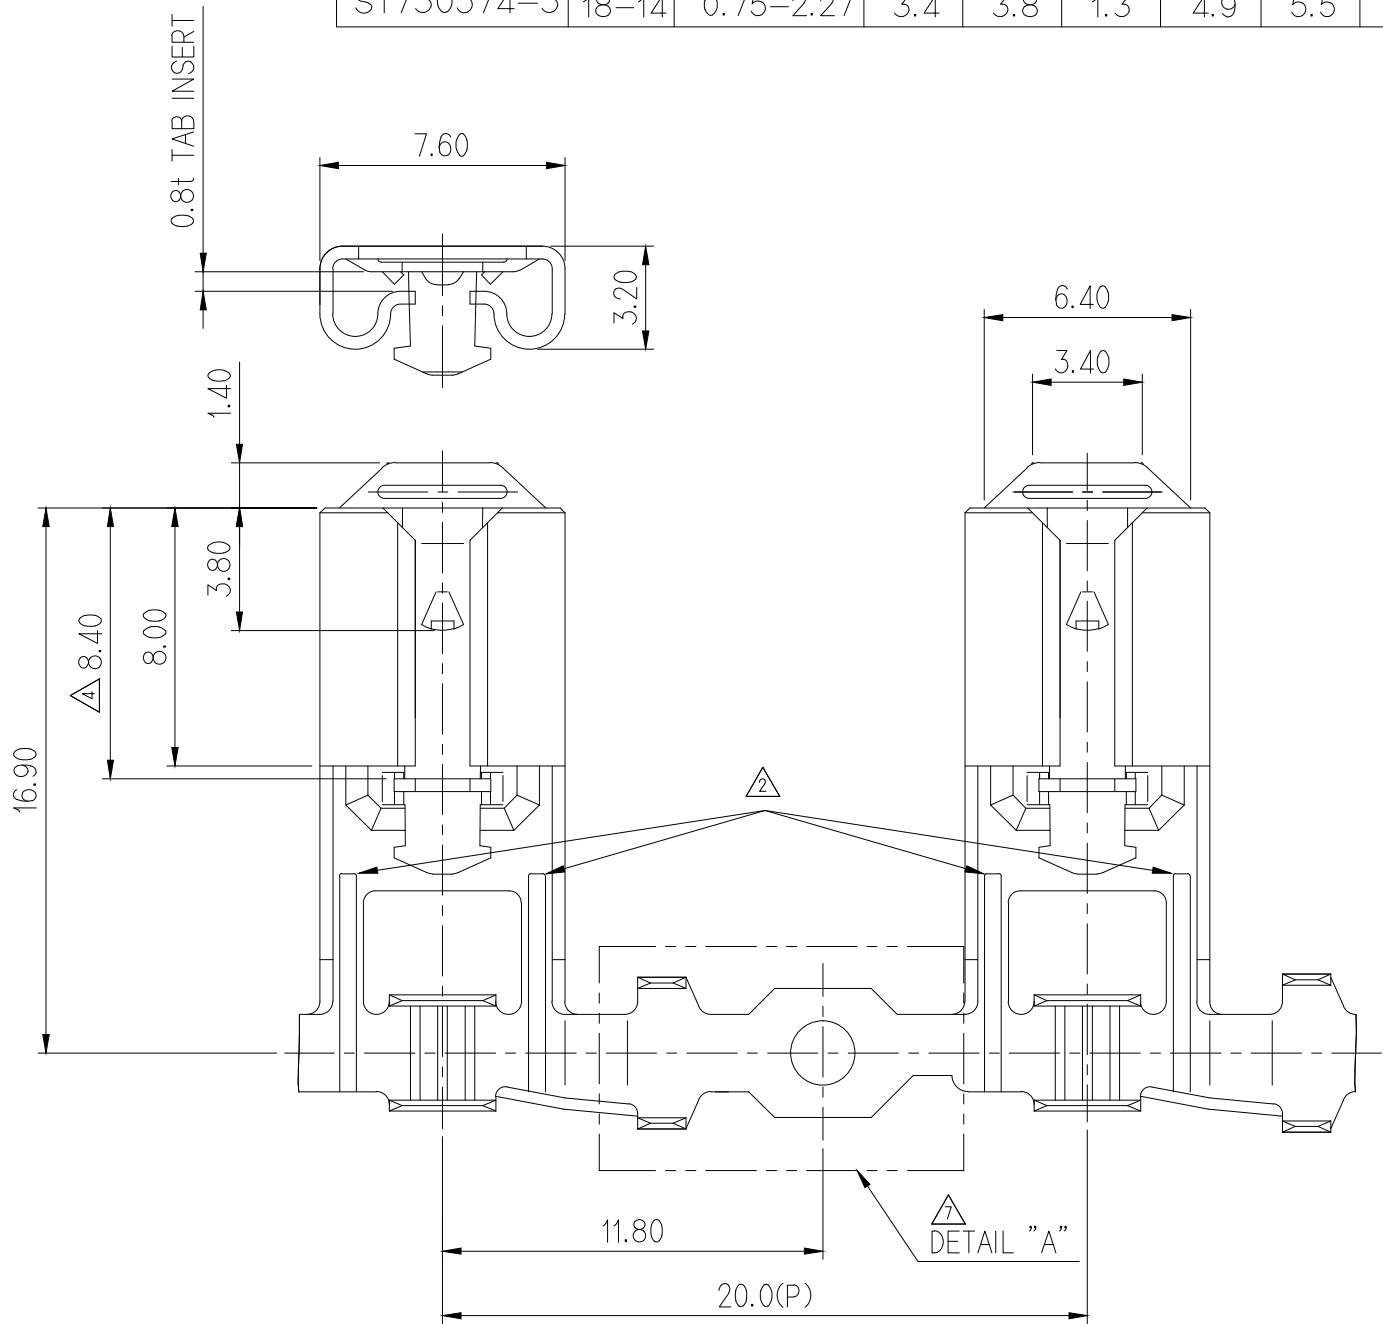


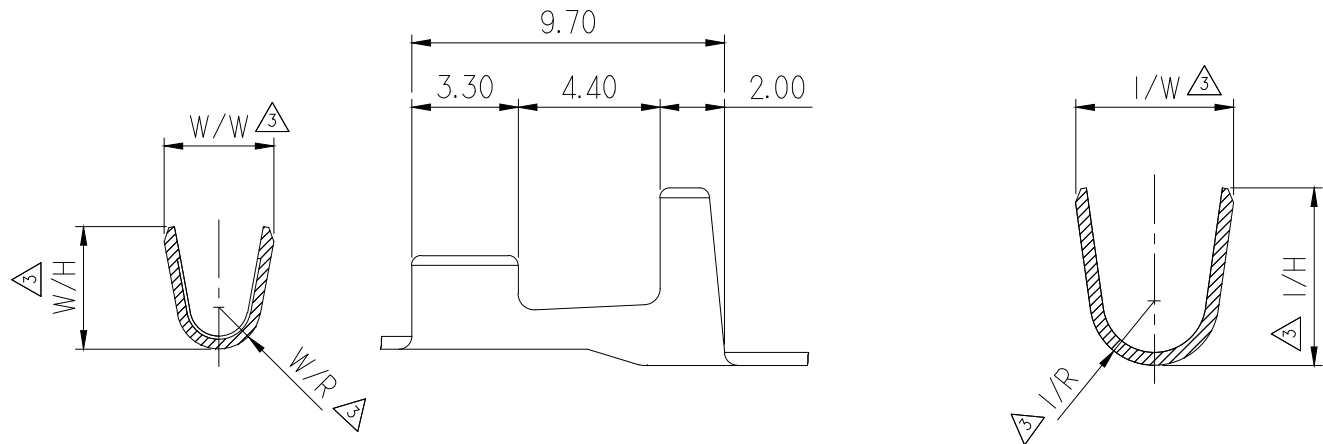

BARREL PART NO	WIRE RANGE		WIRE BALLEL			INSULATION BARREL		
	AWG	(mm ²)	W/W	W/H	W/R	I/W	I/H	I/R
ST730573-3	20-18	0.50-0.80	2.8	3.1	1.2	4.9	5.5	2.0
ST730574-3	18-14	0.75-2.27	3.4	3.8	1.3	4.9	5.5	2.0


GENERAL TOLERANCE (TERMINAL)						USED ON
5MAX	10MAX	20MAX	45MAX	45VR	()	
±0.20	±0.25	±0.30	±0.35	±0.50	±1.0	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 흠, 변형 및 BURR 등이 없을 것
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

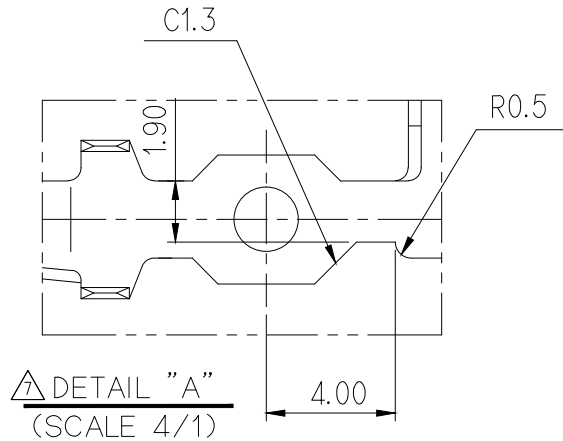

ECO-2106-315의거 도면 제작성	YHJ	PSH	KSH	'21.06.29	MATERIAL BRASS		KOREA ELECTRIC TERMINAL CO., LTD.		
설계사양변경(S110128)근거 도면 제작성	KSJ			'11.04.27					
설계사양변경(S090228)근거 도면 수정	CJH			'09.08.12	FINISH PRE-TIN		KOREA ELECTRIC TERMINAL CO., LTD.		
도면 수정 (2곳)	HEE			'98.09.02	WIRE RANGE SEE TABLE				
제품 추가 (10곳)	HEE			'98.06.15	INSULATION		CLASS TYPE		
형상 변경 (3곳)	KO			'96.10.16	TOLERANCE EXCEPT AS NOTED SEE TABLE				
삽입성 개선	KO			'94.12.19					
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE	SCALE 4/1	PART NO. ST 730573/574-3
DR.	OH.94.02.28			CHK.				PART NAME .250 P-LOCK FLAG TERMINAL (NEW)	
CHK.	S. w k e r			APP.					

APPROVED

2021-10-18

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

KET
ENGINEERED

KOREA ELECTRIC
TERMINAL CO., LTD.