
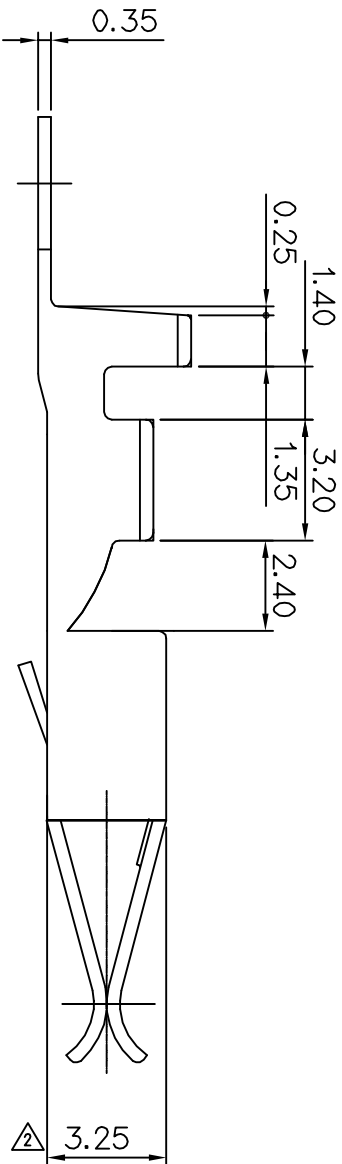



PART NO. SEE TABLE

CUSTOMER DRAWING

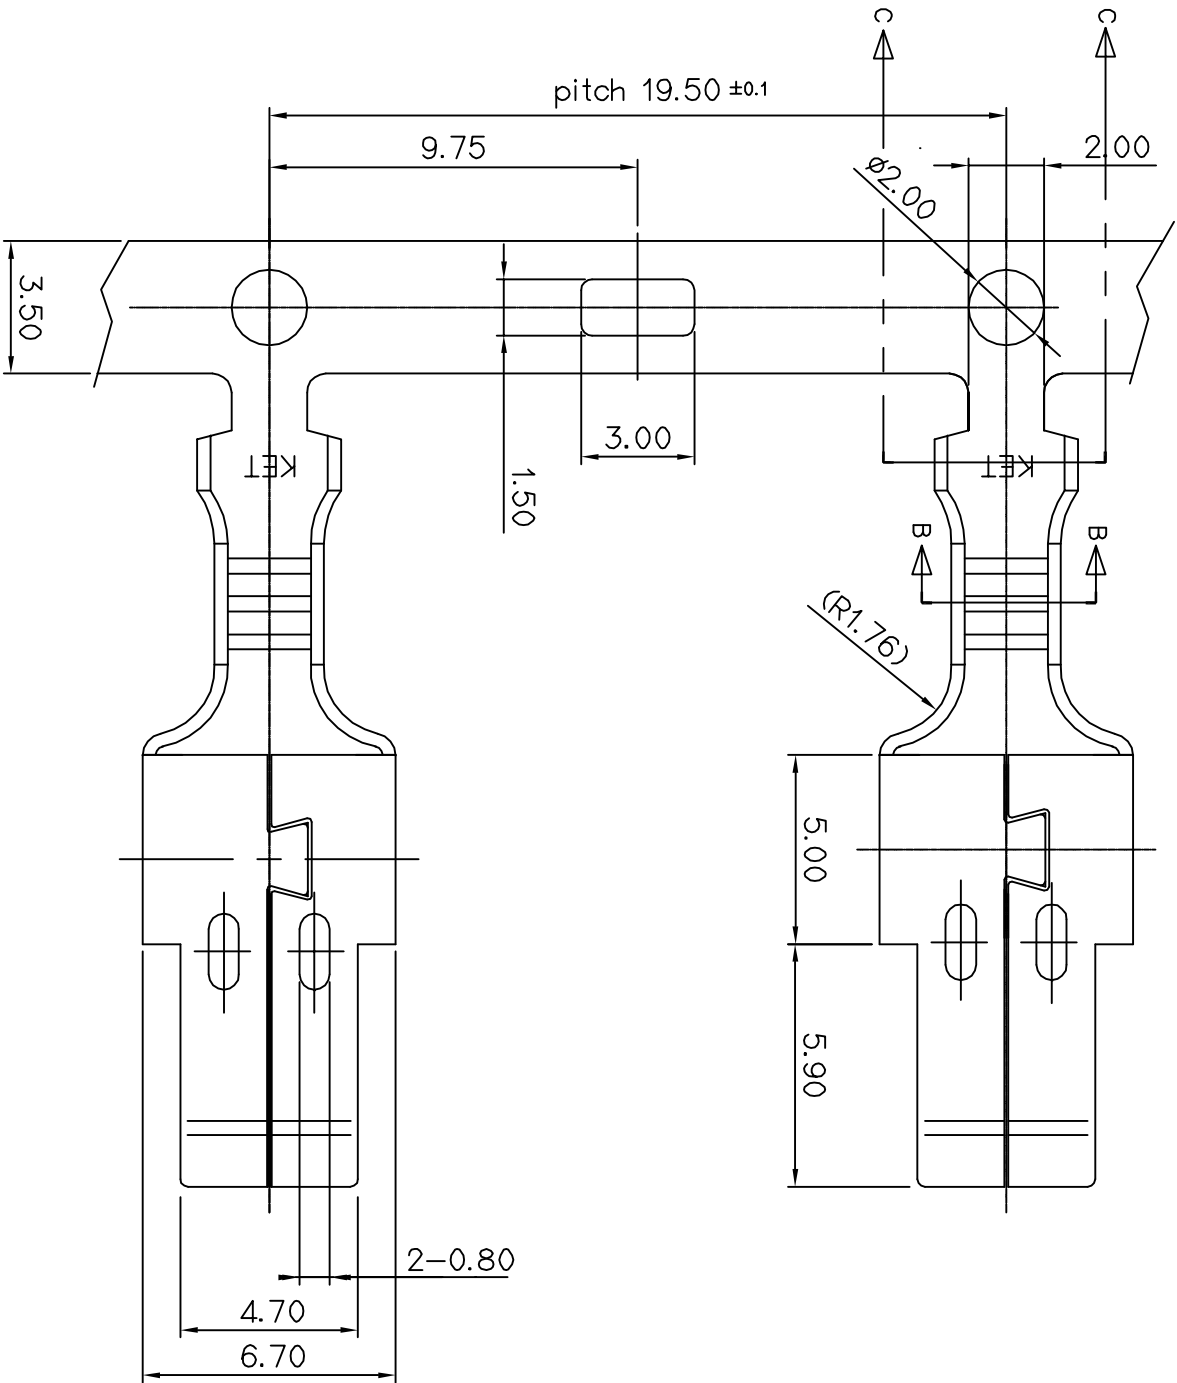

GENERAL TOLERANCE (TERMINAL)				USED ON
50MAX	100MAX	250MAX	ANGLE	ECCENT
±0.2	±0.3	±0.5	±30'	0.1

BARREL PART NO.	WIRE RANGE		WIRE BARREL			INSULATION BARREL		
	AWG #	(mmφ)	W/W	W/H	W/R	I/W	I/H	I/R
ST730948-3	22-20	0.3-0.5	2.9	2.8	0.9	3.8	3.8	1.4
ST730993-3	18-16	0.75-1.25	2.8	3.2	1.2	4.7	4.6	2.0

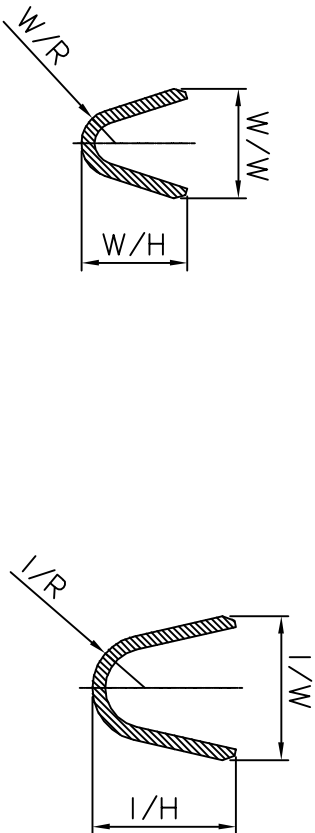

SECTION B-B

SECTION C-C

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 쉘, 변형 및 BURR 등이 없을 것
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

				MATERIAL BRASS 0.35t		FINISH PRE-TIN		KIEIT KOREA ELECTRIC [ENGINEERED] TERMINAL CO., LTD.	
△	설치시8번경(S110128)크기 도면 재작성	KSJ	2024.04.27	11.04.27		WIRE RANGE	SEE TABLE	CLASS	.250
△	설치시8번경(S060186)크기 도면 재작성	KSH	2024.04.27	06.07.04		INSULATION	SEE TABLE	TYPE	
△	설치시8번경(S040049)크기 도면 재작성	SUN	2024.04.27	04.04.27		SCALE	5/1	PART NO.	SEE TABLE
LTPR REVISION RECORD		DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED				
DR. HAK 2004.04.19		CHK.			PART NAME				
CHK. 04/29		APP.	05/02		.250 SLIP-IN REC.(S), (M)				

ISSUE MARK

KIEIT KOREA ELECTRIC
[ENGINEERED] TERMINAL CO., LTD.

CLASS

TYPE

PART NO.

SCALE

PART NAME

(DIMENSIONS IN MM)