
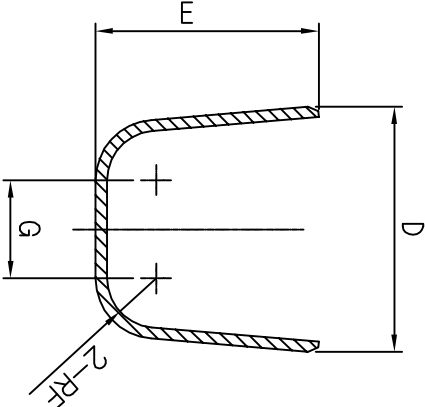




ISO VIEW

| INFORMATION |                         | WIRE RANGE<br>(UL1015, UL1569) | WIRE BARREL |       |            | INSULATION BARREL |      |        | STOPPER |   |
|-------------|-------------------------|--------------------------------|-------------|-------|------------|-------------------|------|--------|---------|---|
| PART NO.    | PART NAME               | AWG (mm <sup>2</sup> )         | A           | B     | RC         | D                 | E    | RF     | G       | H |
| ST731262-3  | 187 P-LOCK<br>DL TM(LU) | #20 + #20                      | 4.90(3.60)  | R1.35 | 6.50(5.90) | R1.60             | 2.60 | (6.30) |         |   |
|             |                         | #18 + #18                      |             |       |            |                   |      |        |         |   |
| ST731261-3  | 187 P-LOCK<br>DL TM(LM) | #20~#16<br>0.5~1.25            | 2.90(2.80)  | R1.10 | 4.70(4.60) | R1.90             | -    | (4.40) |         |   |
| ST731261-3S | 187 P-LOCK<br>DL TM(LS) | #24~#22<br>0.2~0.3             | 2.20(2.20)  | R0.60 | 3.90(3.90) | R1.30             | -    | (4.40) |         |   |

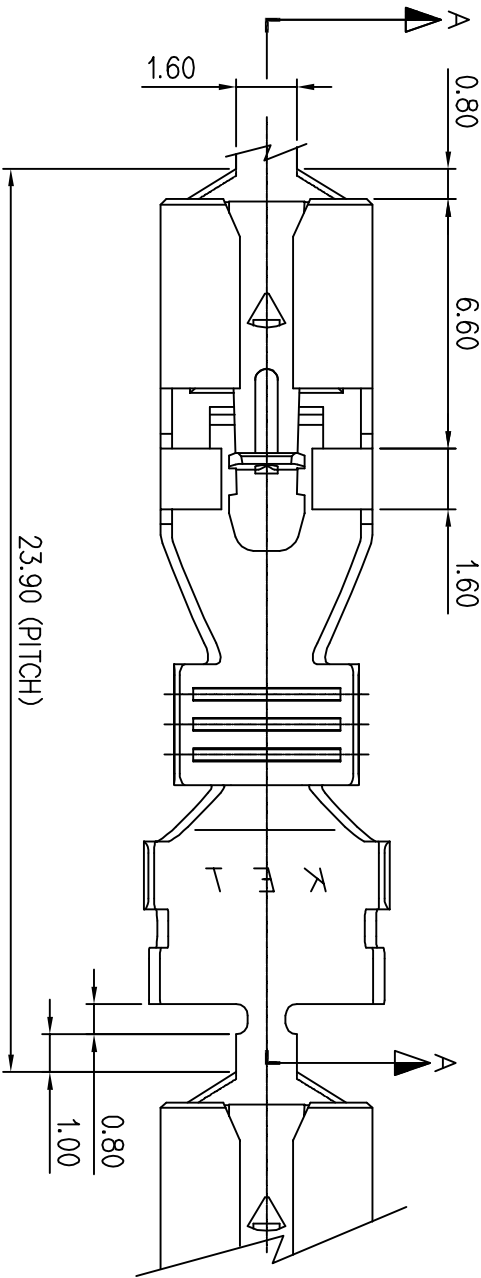


SECTION B-B

SECTION C-C

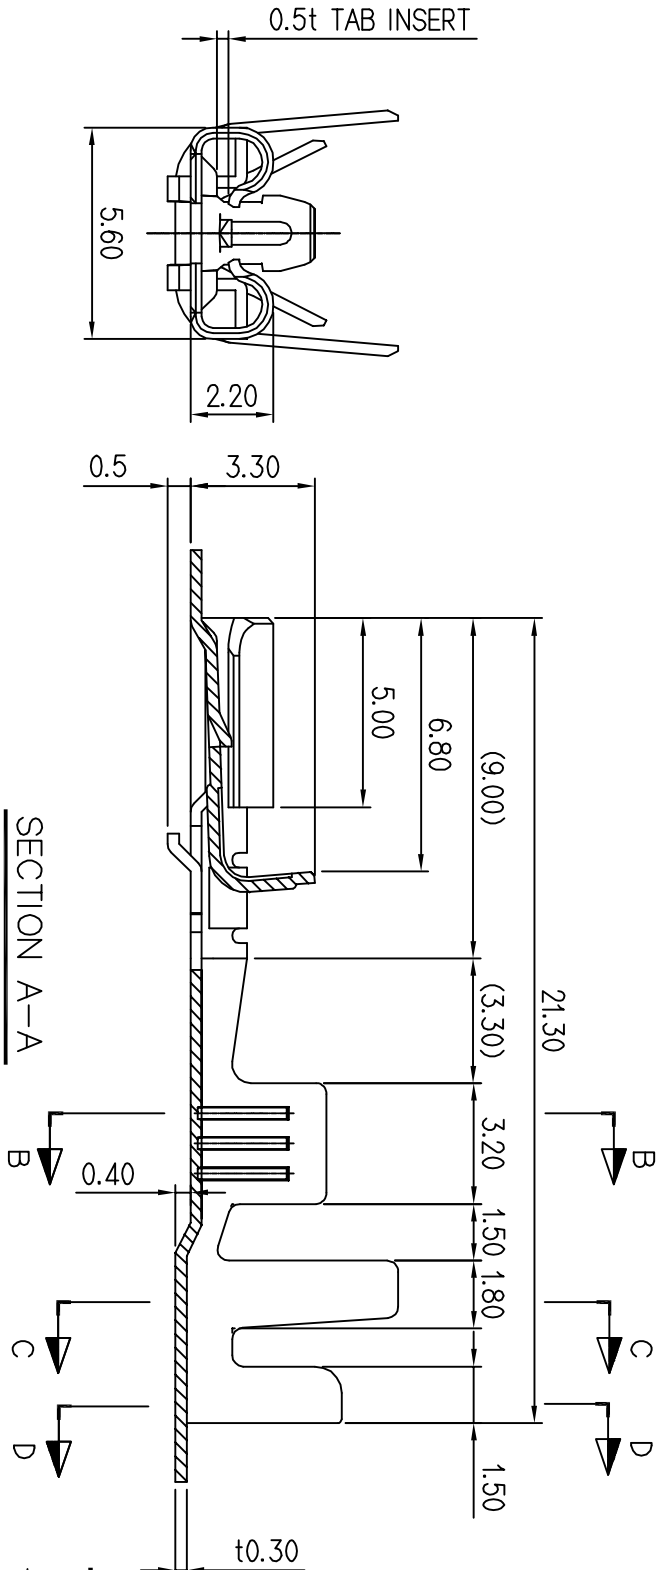

SECTION A-A

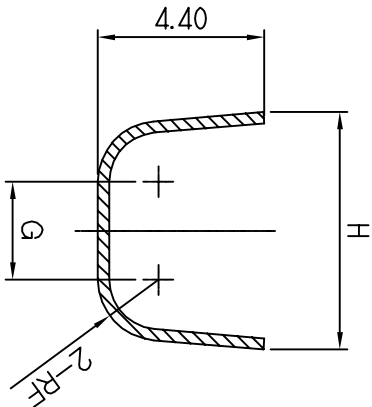

SECTION D-D

NOTE

- 지시없는 R=0.30으로 한다.
- 기능상 유해한 쉘,변형 및 BURR가 없을것.
- 적용 HOUSING : MG615070, MG635148
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs PBDEs)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG615070, MG635148
- 6 HAZARDOUS SUBSTANCE IN PARTS (LEAD,MERCURY,CADMIUM HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED BY THE EU ELV DIRECTIVE & THE ROHS REGULATION.

| GENERAL TOLERANCE (TERMINAL) |        |        |       |       |        | USED ON |  |
|------------------------------|--------|--------|-------|-------|--------|---------|--|
| 10 MAX                       | 20 MAX | 45 MAX | 45 VR | ANGLE | ECCENT |         |  |
| ±0.2                         | ±0.25  | ±0.3   | ±0.5  | ±30°  | 0.1    |         |  |

|                                                                                     |                       |            |                                                                                     |          |      |                                 |                                  |                                                                                     |
|-------------------------------------------------------------------------------------|-----------------------|------------|-------------------------------------------------------------------------------------|----------|------|---------------------------------|----------------------------------|-------------------------------------------------------------------------------------|
|                                                                                     |                       |            |                                                                                     |          |      | MATERIAL                        | BRASS                            |  |
|                                                                                     |                       |            |                                                                                     |          |      | FINISH                          | PRE-TIN                          |                                                                                     |
|                                                                                     |                       |            |                                                                                     |          |      | WIRE RANGE                      | SEE TABLE                        |                                                                                     |
|                                                                                     |                       |            |                                                                                     |          |      | INSULATION                      | SEE TABLE                        |                                                                                     |
|  | ECO-1510-054 근거 도면 수정 | PSH<br>KSH | BUC                                                                                 | 15.10.05 |      | TOLERANCE<br>EXCEPT<br>AS NOTED | SCALE                            | PART NO.                                                                            |
| LTR                                                                                 | REVISION RECORD       | DR         | CHK.                                                                                | APP.     | DATE | SEE TABLE                       | 5/1                              | ST731261-3, -3S, 1262-3                                                             |
| DR.                                                                                 | KSH '10.05.17         | CHK.       |                                                                                     |          |      | PART NAME                       | 187 P-LOCK DL TERMINAL (L, M, S) |                                                                                     |
| CHK.                                                                                |                       | APP.       |  | 5/17     |      |                                 |                                  |                                                                                     |