




GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30°	0.1	

NOTE

- 6 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELY DIRECTIVE & RoHS REGULATION
- APPLICABLE HOUSING : MG635571
- MUST BE FREE OF BURR, MARK AND IMPERFECTION THAT AFFECT FUNCTION.

주 기

- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELY 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 적용 HOUSING : MG635571
- 기능상 유해한 BURR, 찍힘 및 결함 없을 것.

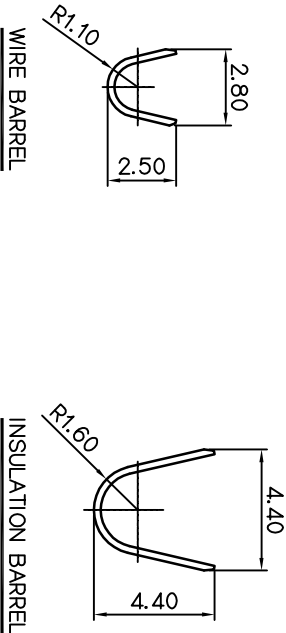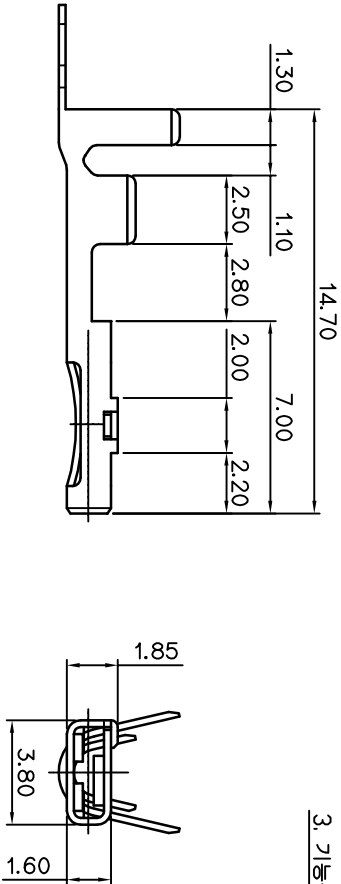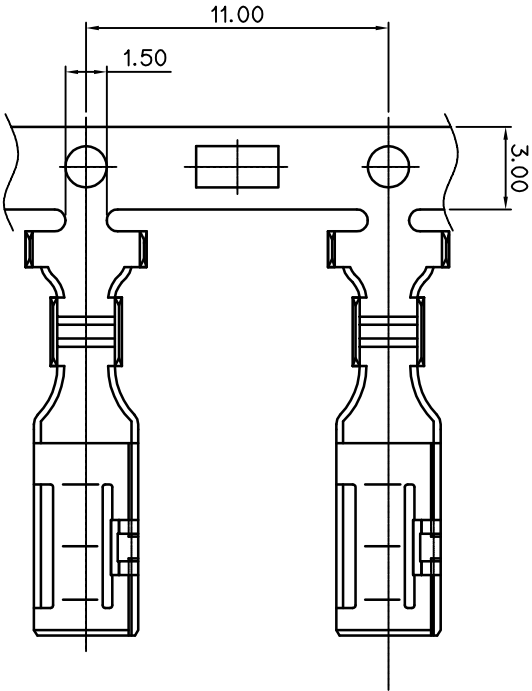

REVISION RECORD				MATERIAL		FINISH		WIRE RANGE		INSULATION		SCALE		PART NO.	
DR.	P.S.H. '11.11.28	CHK.	K.S.H.	DATE	BRASS	PRE-TIN		AWG #18-#20		TYPE		5/1		ST731342-3	
CHK.				APP.	BUC	KIEP KOREA ELECTRIC TERMINAL CO., LTD.		125		125 FEMALE TERMINAL					