

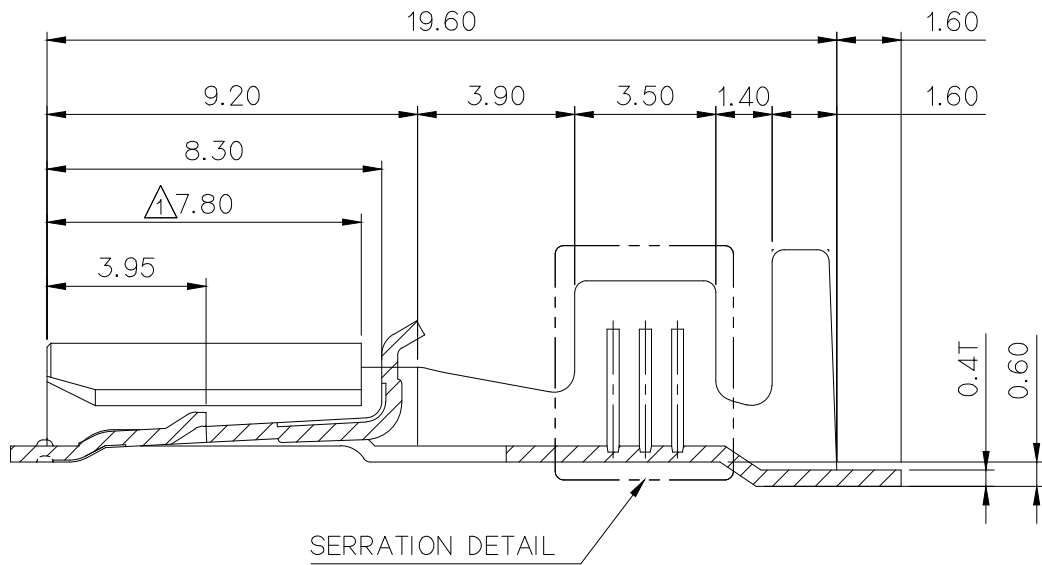
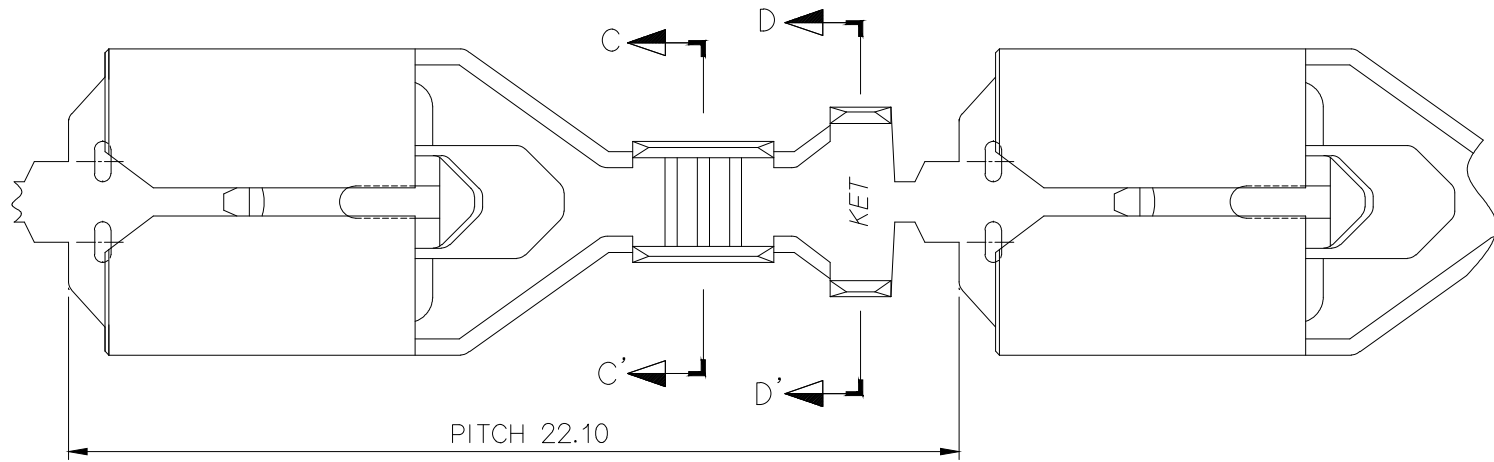


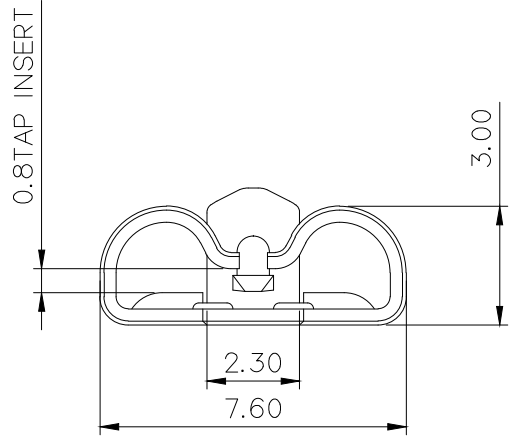


(T)/(S)/(M) SIZE

(L) SIZE

(L)/(XL) SIZE

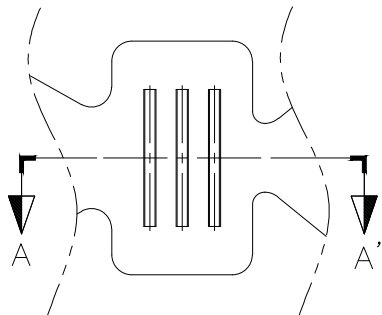


SECTION A-A'
SCALE 5/1

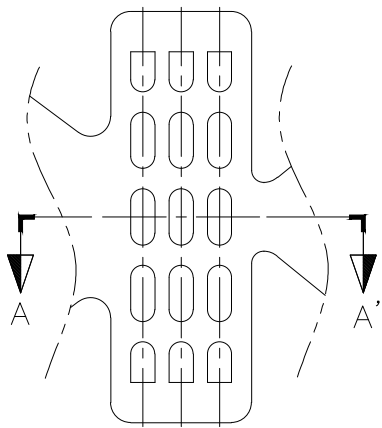

SECTION B-B'
SCALE 5/1

GENERAL TOLERANCE (TERMINAL)						USED ON
10MAX	20MAX	45MAX	45VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

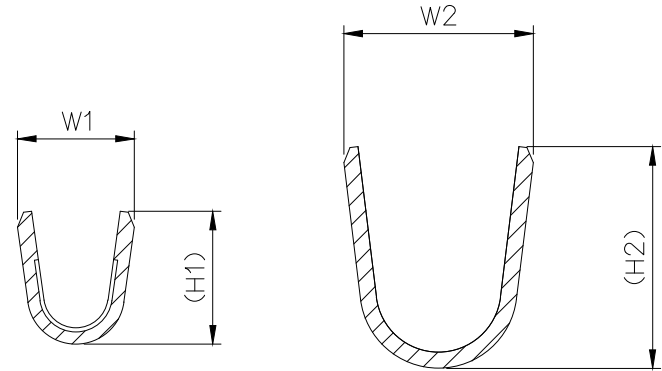

NO.	PART NAME	PART NO.	W1	(H1)	W2	(H2)	WIRE RANGE(mm ²)	REMARK<외경>
1	250II P-LOCK TML(T)	ST731394-3T	2.60	2.70	4.20	4.80	UL1015 #24 - #20	ø2.15 ~ ø2.60
2	250II P-LOCK TML(S)	ST731394-3S					UL1015 #22 - #20	
3	250II P-LOCK TML(M)	ST731394-3M	3.00	3.40	4.70	5.50	UL1015 #18 - #16	ø2.80 ~ ø3.10
4	250II P-LOCK TML(L)	ST731394-3L	4.00	4.50	5.60	6.70	UL1015 #14 - #12	ø3.50 ~ ø4.00
5	250II P-LOCK TML(XL)	ST731394-3XL	4.70	5.80	6.20	7.20	UL1015 #10	ø4.60

주 기

- 지시없는 R은 0.3, C는 0.1로 한다.
- 기능상 유해한 BURR가 없을것.
- 제품내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3RADIUS, CHAMFER 0.1.
- MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.
- 10 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2021-10-22

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL BRASS		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH PRE-TIN		
						WIRE RANGE SEE TABLE		CLASS 250
	ECO-2103-038 근거 도면 재작성	CSM	PSH	KSH	'21.02.23	INSULATION SEE TABLE		MATERIAL SIZE
	ECO-1412-154 근거 도면 재작성	LCM	KSH	BUC	'14.12.08			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1
DR. LCM 2014.03.31		CHK. PSH 2014.03.31				PART NAME		PART NO. SEE TABLE
CHK. KSH 2014.03.31		APP. BUC 2014.03.31				 250II P-LOCK TML (T), (S), (M), (L), (XL)		