



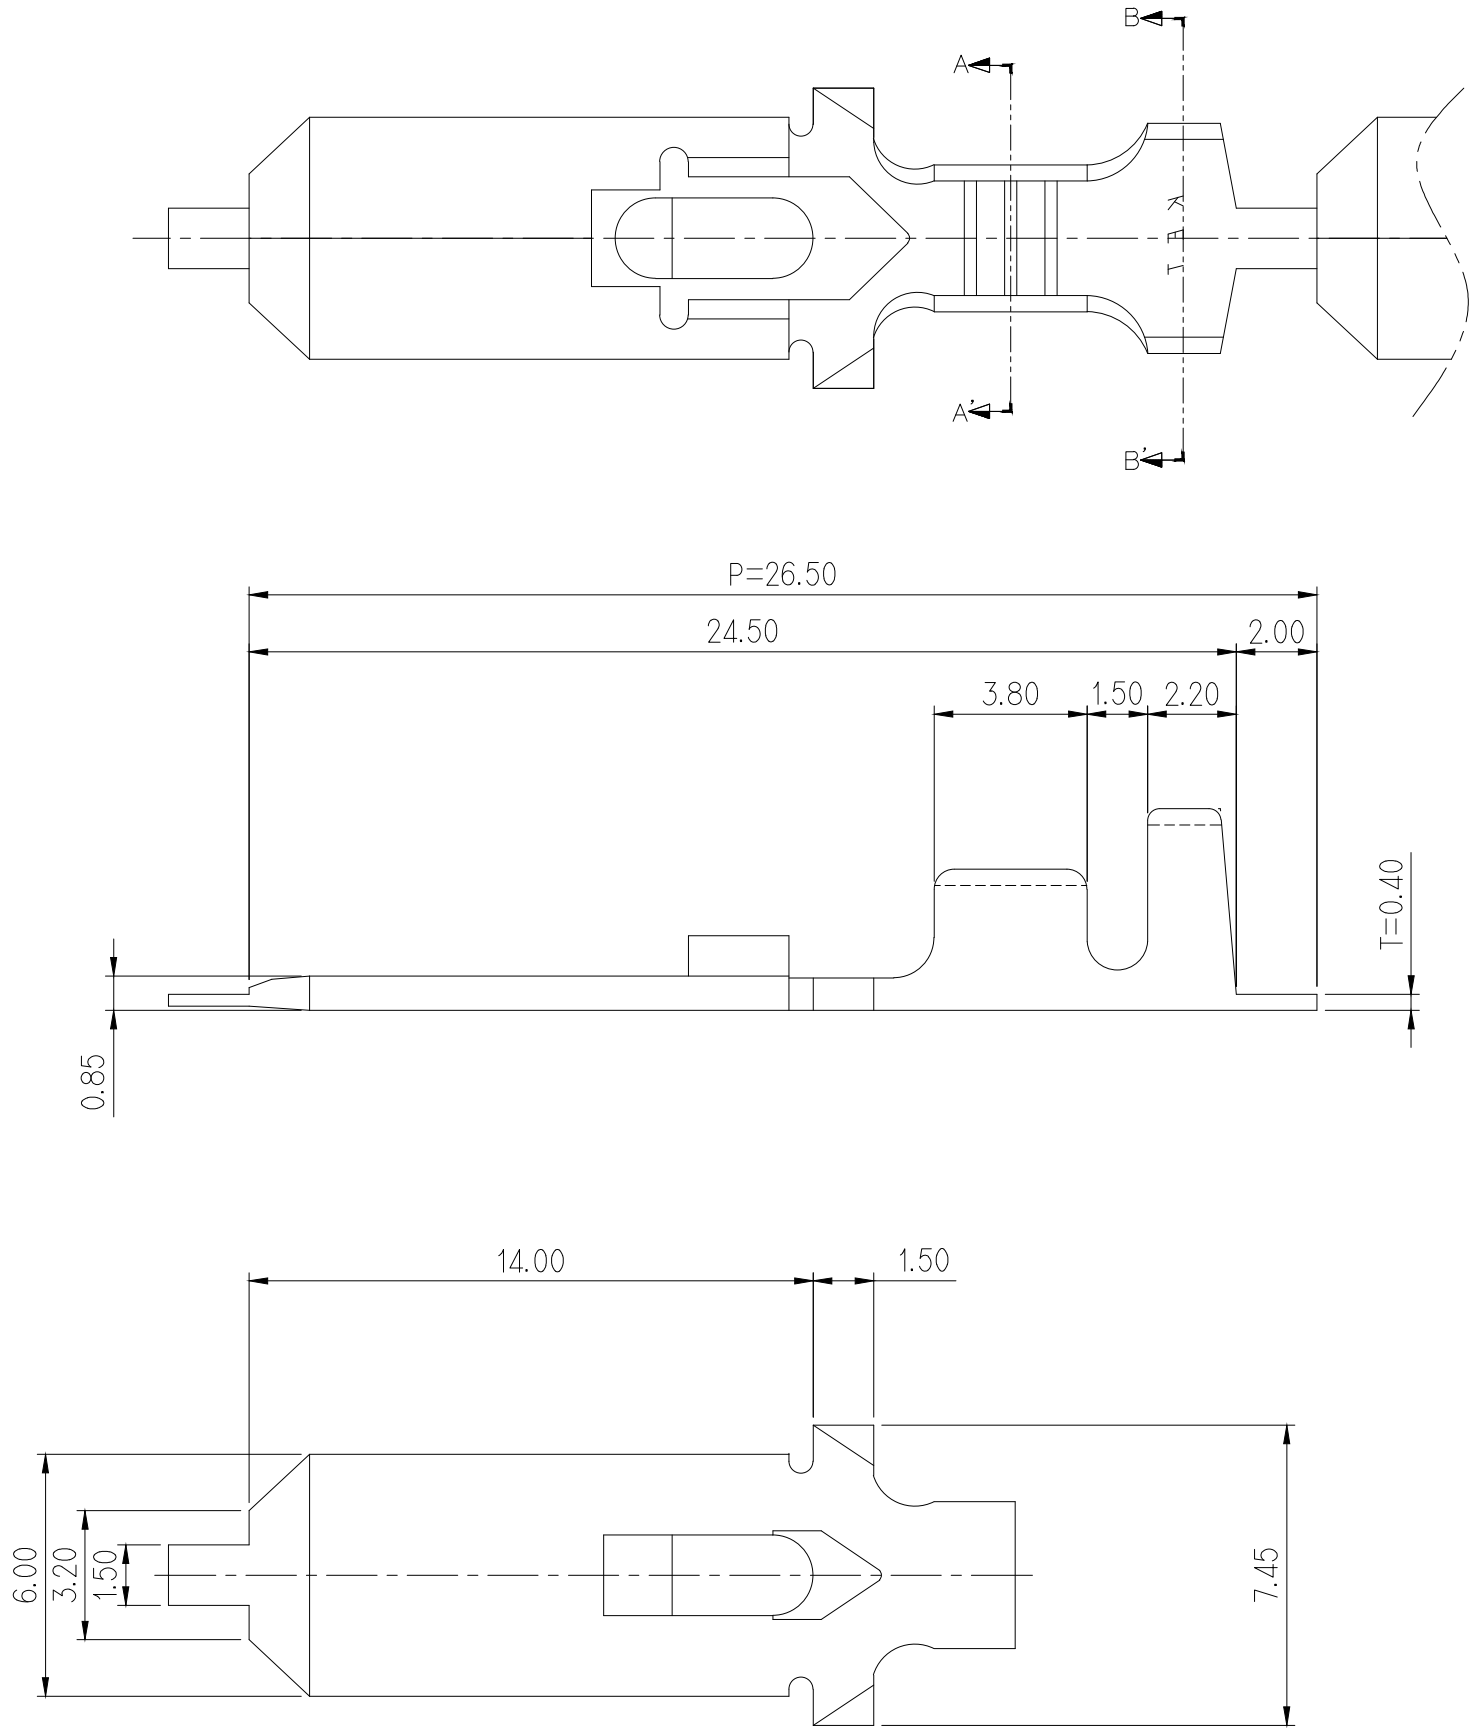

GENERAL TOLERANCE (TERMINAL)						USED ON
5MAX	10MAX	20MAX	45MAX	45VR	()	
±0.2	±0.25	±0.30	±0.35	±0.50	±1.0	

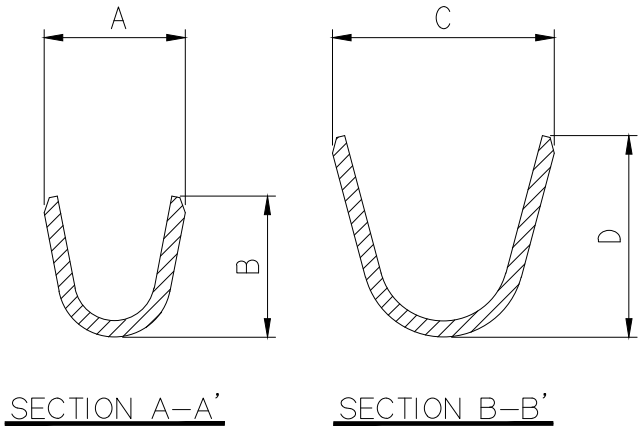

NO	PART NAME	PART NO	AWG	WIRE SIZE(㎟)	A	B	C	D
1	250 SLIP-ON TAB TML(S)	ST740253-3S	#22-#20	0.30-0.50	2.90	2.60	3.80	3.80
2	250 SLIP-ON TAB TML(M)	ST740254-3M	#18-#16	0.85-1.25	3.50	3.50	5.50	5.00
3	250 SLIP-ON TAB TML(L)	ST740255-3L	#14-#12	2.00-3.00	5.20	4.50	6.20	5.60

- 주 기
- 지시없는 R=0.30으로 한다.
 - 기능상 휨,변형 및 BURR가 없을 것.
 - 적용 HOUSING: 1P[MG621934,MG625076],3P[MG624757]
 - 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대허용농도를 초과해서는 안된다.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL	BRASS	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH	PRE-TIN	
					WIRE RANGE		
△	ECO-1806-032 근거 도면 재작성	LCM KSH	BUC	'18.06.04	INSULATION		CLASS .250
△	ECO-1708-305 근거 도면 재작성	LCM KSH	BUC	'17.08.21			TYPE
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1
	DR. LCM '17.05.11		CHK. PSH '17.05.11		PART NAME	250 SLIP-ON TAB TML(S)/(M)/(L)	
	CHK. KSH '17.05.11		APP. BUC '17.05.11				PART NO. SEE TABLE