


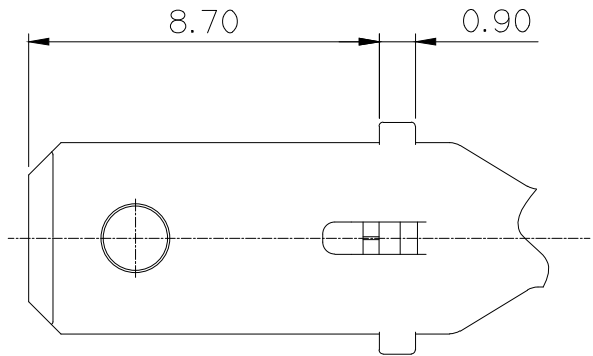
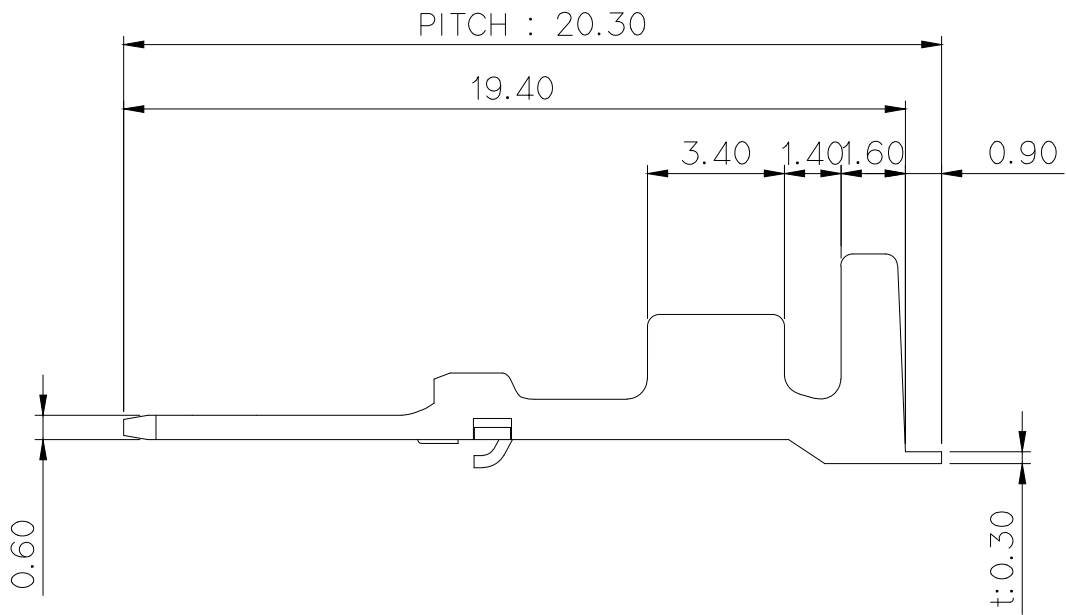
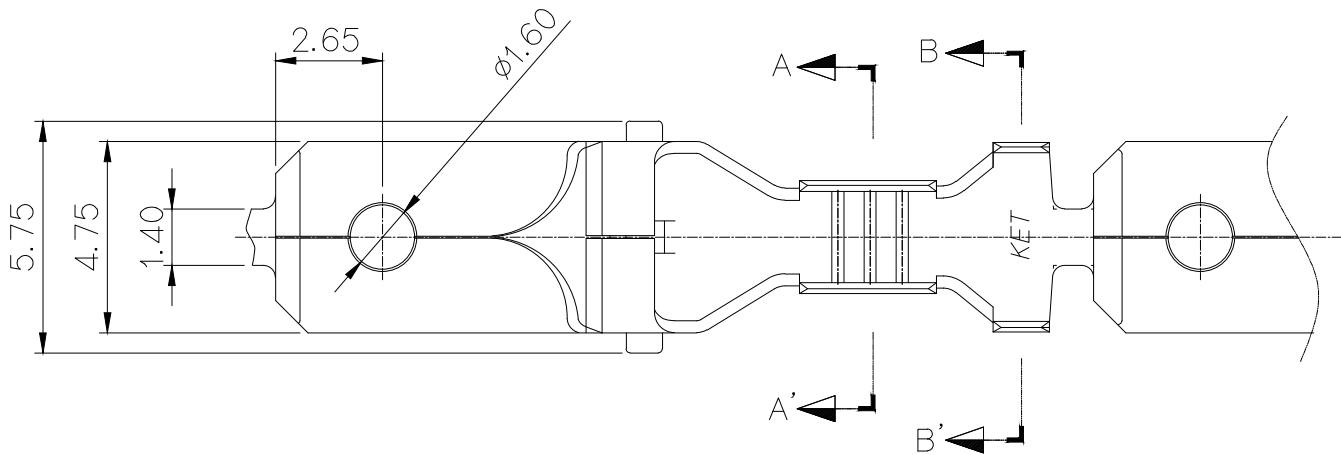


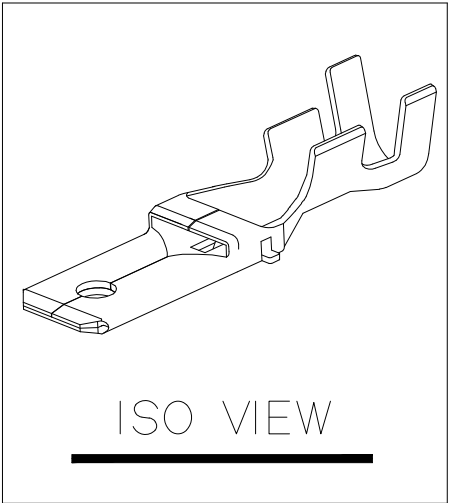

GENERAL TOLERANCE (TERMINAL)						USED ON
5MAX	10MAX	20MAX	45MAX	45VR	()	
±0.2	±0.25	±0.30	±0.35	±0.50	±1.0	



SECTION A-A'

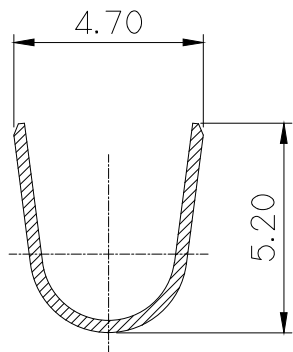

SECTION B-B'

NOTE

1. 6 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION
2. MUST BE FREE OF BURR, MARK AND IMPERFECTION THAT AFFECT FUCNTION.
3. APPLICABLE HOUSING : MG625484-*01

주 기

1. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
2. 기능상 유해한 BURR, 찍힘 및 결함 없을 것.
3. 적용 HOUSING : MG625484-*01

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL		BRASS	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		PRE-TIN		
						WIRE RANGE		CLASS		.187
						INSULATION		TYPE		P-LOCK
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO.	ST741400-3M
DR.	SMG '18.02.08		CHK.			PSH '18.02.08	PART NAME 187 P-LOCK MALE TM'L			
CHK.	KSH '18.02.08		APP.			BUC '18.02.08				