


PART NO. SEE TABLE




CUSTOMER DRAWING

DIMENSIONS IN MM)




GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NO.	PART NAME	PART NO.	R1	(H1)	W1	R2	(H2)	W2	WIRE RANGE (mmφ)
1	POWER RING ASS'Y(M)	ST761319-3	2.00	4.50	5.00	2.50	6.00	6.20	0.80~1.30 (UL1015)
2	POWER RING ASS'Y(L)	ST761320-3	2.20	5.20	6.00	3.00	6.60	6.80	2.20~3.50 (UL1015)
3	POWER RING ASS'Y(XL)	ST761330-3	2.60	6.90	6.60	3.00	6.60	7.10	5.20 (UL1015)

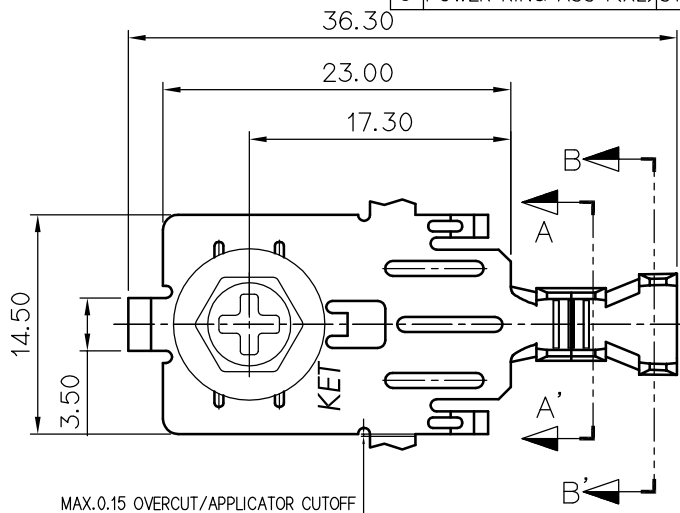

주 기

1. 지시없는 R=0.30으로 한다.
2. 기능상 유해한 흠,변형 및 BURR가 없을것.
3. 적용 HOUSING : MG625428-5
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs PBDEs)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대허용 농도를 초과해서는 안된다.

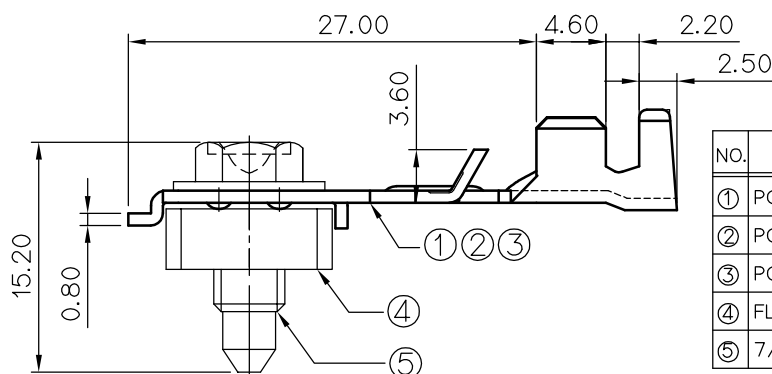

NO.	PART NAME	PART NO.	MATERIAL	FINISH
①	POWER RING TM'L(M)	ST792363-3	BRASS	PRE-TIN
②	POWER RING TM'L(L)	ST792364-3		
③	POWER RING TM'L(XL)	ST792456-3		
④	FLANGE BOLT(12mm)	R602365	STEEL	NIKEL PLATE
⑤	7/16" SQ NUT	R602366		

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG625428-5
4. 6 HAZARDOUS SUBSTANCE IN PARTS (LEAD,MERCURY,CADMIUM HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED BY THE EU ELV DIRECTIVE & THE ROHS REGULATION..

ISSUE MARK

					MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE	SEE TABLE	
					INSULATION		
①	검보합격에 의한 도면재작성	KSH	5%	'11.05.17	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	TYPE POWER CONN'T
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.	SEE TABLE
	DR. KSH. '11.02.08		CHK.			PART NAME	
	CHK.		APP.	5%	02/08		POWER-RING ASS'Y(M/L)